

REQUEST FOR QUOTATION
STO-93 Rev. 10/01

INSTRUCTIONS

Please quote us your prices on the commodities listed below.
All prices must be F.O.B. Destination and you must show Unit Price, Amount, and Total or bid may be rejected.

Since the State of Connecticut is exempt from the payment of Federal Excise Taxes and the Connecticut Sales Tax, do not include such taxes.

We reserve the right to reject in whole or in part any or all bids submitted.

The contractor agrees and warrants that in the performance of this contract he will not discriminate or permit discrimination against any person or group of persons on the grounds of race, color, religious creed, age, marital status, national origin, sex, sexual orientation, learning disability, mental retardation or physical disability, including, but not limited to, blindness, unless it is shown by such contractor that such disability prevents performance of the work involved, in any manner prohibited by the laws of the United State or of the State of Connecticut. If the contractor agrees and warrants that he will make good faith efforts to employ minority business enterprises as subcontractors and suppliers of materials on such project. The contractor further agrees to provide the Commission Human Rights and Opportunities with such information requested by the Commission concerning the employment practices and procedures of the contractor as related to the provisions of this section and section 46a-56. For the purposes of this section "minority business enterprise" means any subcontractor or supplier of materials fifty-one percent or more of the capital stock, if any, or assets of which is owned by a person or persons: (1) Who are active in the daily affairs of the enterprise; (2) who have the power to direct the management and policies of the enterprise; and (3) who are members of a minority, as such term is defined in subsection (a) of section 32-9n.

VENDOR:

This is not an order. Fill in and return to STATE OF CONNECTICUT at the address shown below.

ISSUED BY (Agency) DORS/Bureau of Rehabilitation Services	(Return bid attention of) Nina N. Copeland	BID NO. 16BRS038
AGENCY ADDRESS 55 Farmington Avenue, 12th floor, Hartford, CT 06105		DATE ISSUED June 29, 2016
SHIP PREPAID TO (ABOVE AGENCY AT ADDRESS SHOWN.) (Unless other address is entered here) Easton, CT		DATE AND TIME BID REQUIRED 07/19/2016 at 4:00 P.M.
SIGNED (For Agency) Nina N. Copeland	TITLE Secretary I	TELEPHONE NO. (860) 424-4876
		DATE MATERIAL REQUIRED 60 days

ITEM No.	DESCRIPTION	PRESCRIPTION REQUIREMENTS AMOUNT	
	<u>REQUEST FOR QUOTE</u>		
	VEHICLE MODIFICATION FOR A PERSON WITH A DISABILITY Chrysler Corp. Grand Mini, Dodge minivan - ESMC #21619	Entry	\$
	VENDOR REQUIREMENTS: MUST HAVE NMEDA/QAP CERTIFICATION AND PROVIDE IN-STATE SERVICE.	Interior	\$
	See Specifications below RETURN BID TO: Nina N. Copeland at the above address E-MAIL: Nina.Copeland@ct.gov PHONE#: (860) 424-4876 FAX#: (860) 424-4850 WEB SITE: http://www.dss.state.ct.us	Primary Controls	\$
		Secondary Controls	\$
	<i>All vendors must provide explanation for any item, device or system which is not identical to that specified in the Vehicle Evaluation Report but considered equivalent by the vendor</i> **When submitting a bid via email, the bid number must be referenced on the subject line	Preparations	\$
			TOTAL: \$

To be completed	QUOTATION NO.	DATE SUBMITTED	DELIVERY AS REQ'D ABOVE (Unless noted here)		
	SIGNED		TITLE	TELEPHONE NO. & EXTENSION	CASH DISCOUNT PAYMENT TERMS _____% ____days, NET 45 DAYS
by bidder	VENDOR FEIN/SSN		ARE YOU INCORPORATED YES NO	PURCHASE ORDER ADDRESS (If different from bidder's address above)	



The Mobility Center
 Easter Seals Central Connecticut
 158 State Street, Meriden, CT 06450
 (203) 630-2208 (203) 634-0341 (fax)

Creating solutions, changing lives. Helping people with disabilities gain greater independence.

Vehicle Evaluation

Date of Evaluation: May 13, 2016

- | | | |
|--------------------------------|--|--|
| <input type="checkbox"/> AUTO | <input type="checkbox"/> FULL SIZE VAN | <input checked="" type="checkbox"/> MINIVAN |
| <input type="checkbox"/> OTHER | <input type="checkbox"/> FORD | <input checked="" type="checkbox"/> CHRYSLER CORP GRAND MINI |
| | <input type="checkbox"/> DODGE | <input type="checkbox"/> HONDA |
| | <input type="checkbox"/> GM | <input type="checkbox"/> TOYOTA |
| | | <input checked="" type="checkbox"/> OTHER Dodge |

- Lowered Floor Van Scooter Lift Driving Equipment High Tech

Disability Spinal Cord Injury

History of Muscle Spasms (Explain) N/A

Height 49.75" in w/c Weight approx. 259 lbs

Vehicle used for evaluation: Client's modified Dodge Van

Wheelchair used during evaluation Quickie 2 Weight approx. 57 lbs

Wheelchair to be used for vehicle modification same Also has power chair which was not available to assess/measure at the time of this assessment

Town Easton

Bidders:

Please list any specifications that vary from those listed in the vehicle evaluation report

Disability: Spinal Cord Injury C6-C7 Incomplete

History of muscle spasms: N/A

Exact description of client's current vehicle: Swing door Sliding door Power operated
 Power door locks Odometer reading: 103,485

This client has been driving a modified vehicle since he was 16 years old. He is currently in a Dodge MiniVan that has hand controls, adjustable 6-way seat, adapted control for the temperature control, modified emergency brake, Remote controlled fold up ramp with sliding side entry. He drives from the OEM seat and can transfer from the wheelchair to the driver seat independently. He is able to secure the wheelchair with the seatbelt.

Name of registered owner: self License Plate: n/a

Insurance carrier: n/a Policy #: n/a

Vehicle recommended (make, model, year & engine) air conditioning (front or rear) (on full sized vans minimum G.V.W. should be 7,000 lbs.) Scooter owners should consider a minivan or station wagon. If already purchased by client, indicate whether van is customized or stripped down, i.e. cloth interior vs. no covering on metal walls. He is currently in need of a similar set-up like that in his current vehicle with some revisions to operating secondary controls, access for increased use of the power chair and to ensure he has proper proximal support to maintain trunk alignment. He will require remote access to dropping/lifting the ramp from the side entry. He will require a 6-way adjustable seat to enable him independence with transfers. There needs to be further assessment and fitting for ideal hand control placement since he is currently not able to manage secondary controls as easily as he once did. He will need to have reduced effort steering given his limited UE function and strength. Having Reduced

Justification for recommendation of type of vehicle described above:

This consumer would benefit from a new vehicle since he works full time and is non-ambulatory from an accident in his teens. He is an active participant in family events and he has engaged in wheelchair sports in the past.

Vehicle used for evaluation (make, year, model, wheelbase):

ESMC's Chrysler Town and Country

Wheelchair used during evaluation: Quickie 2 Weight: about 57 lbs

Wheelchair to be used for vehicle modification: same Weight: Same

NOTE: Patient also has a power chair that he may be starting to use in the van so additional measurements will be needed with the second chair to ensure access through the doorway from a higher seat and from a heavier chair.

Clients driving from a power wheelchair will require a swing-away mount for the joystick.

Replacement wheelchairs should maintain client's positioning as close as possible to previous chair's dimensions including make and model, length, width, seat height and wheelbase.

Any new wheelchair that exceeds the dimensions of client's current chair may prohibit the client's ability to enter, lockdown, or exit the modified vehicle. Specifically, the new wheelchair may be too long or too wide for the ramp or lift, the driver tiedown may not be adaptable to the new wheelchair, and/or maneuverability

may be inhibited when positioning wheelchair for driving and/or riding as a passenger. Client is responsible for notifying funding source of any changes in wheelchair or vehicle following the date of this report.

Funding source name: BRS

Funding source telephone: _____

Evaluation location: Easter Seals Mobility Center

ENTRY

1. **Outside Lift/Ramp Operation**

- Remote Other Uses remote control
 Magnetic or key (including security feature) (back-up for drivers of full sized vans only)

2. **Wheelchair Access** (All vehicles equipped with wheelchair lifts must be provided with overhead lighting of sufficient candle power to illuminate the lift and lift platform when in use. All vans equipped with wheelchair lifts must comply with FMVSS 403 and 404).

- Fully Automatic Lift* Scooter Hoist (location/model#) _____
 Ramp for lowered floor mini (52") (folding ramp if client to be vehicle operator)
 (ramp actuator must stop automatically when contacting fixed object or surface)
 (actuator must not extend more than 24" above the floor) (slope no steeper than 1:6 ratio)
 (length not to exceed 60")
 Side Entry** Rear Entry Attendant Control
 Kick out switch arm (operated on right or left when backed onto the lift based on client preference)
 One Arm Lift Two Arm Lift (front passenger seat may not be reclined) No Overhead Lift Structure
 Folding Platform Feature (power fold) Solid Platform Dual Entry (Two-arm only, no fold)
 Slide Away lift

* Lift must have rated capacity of twice the weight of individual and wheelchair combined or 750 lbs; whichever is less.

** Wheelchair lift leveling spacer to be added to right side suspension if side to side dimensions vary 1 inch or more.

3. **Automatic Door Opener** (open-feature must be disabled whenever the transmission is in gear or parking brake is off) (Factory power sliding door should be ordered by the client when available)

- Swing Slide (not for full size lowered floor) Hatch (factory order on Chrysler)

4. **Raised Side/Rear Door** (if clear entrance needed is over 47" full size)

- Swing Slide Full Raised Door (for raised roof vans) 4" 6" 8"
 Raised Eyebrow Peel 1" 2" 3" (3" not available for minivans)

5. **Raised Roof** (painted to match) with roll bars/structural reinforcement (meeting SAE or NMEDA requirements or certified test documentation) and color coordinated roof liner (rear a/c in roof must be maintained). (Front stabilizer bar must be ordered on vehicle).

- Sport Top (11-12") Executive Top (14-16") Full Raised (16"+)

INTERIOR

6. **Lowered Floor** or minimum 10 gauge steel or floor structure that has been crash tested (Ford full size with swing doors, Chrysler Grand Mini, or GM Mini). Note: Vehicles with dual batteries or rear heat and air conditioning may require permanent removal of one battery and/or air conditioning unit. Client will assume the additional costs incurred in order to retain the dual battery and/or rear air conditioning unit. When relocating fuel tank, OEM warranty tank should be used when available, otherwise FMVSS #301 certified tank must be used. N.B., For lowered floor of 5" or greater on full sized vans the factory gas tank will be replaced with one that will hold less gallons than the original.
*Larger wheel diameter increases ramp grade. **Not for all wheel or four wheel drive vans. No 2008 Ford Club Wagons.**

Full Size Van: 6" (2" body lift kit to be used) (53") 9" Norcal (56")
 Complete Driver Package Passenger-midsection Double lowered front area & midsection
(new van) (one-arm lift, narrow wheelchair only)

Mini Van: *(must have at least 15" rims/tires)

8" in-floor ** Chrysler Toyota Honda
(**passenger only, client expense)

- Kneeling Mini Van (mechanical) (Air Kneel on GM will require moisture trap with push button ejection valve and antifreeze injection feature or approved equivalent – must be accessible to individual using a wheelchair)

7. **Wheelchair Tiedown System** (all driver tiedown systems will be automatic and will include an ignition interlock or an audible and visual warning that the wheelchair is not locked into place). All tiedowns will be crash tested types and supplied with FMVSS complying seat belt. (Adapting power wheelchair for electric tiedown will result in only 1-3" ground clearance).

Power Tiedown Remote cable release (mounted within client or caregiver's reach)
 Driver Passenger (right front removable seat without tools) (must include deactivation box)

4 Point Tiedown Kinedyne Titan or equivalent Wheelchair access loops
(passenger, or justify)

Right front removable seat without tools (not available if high tech) Midsection

Built-in floor sockets for 4 point tiedown system for future use at right front and center rear passenger positions will be required on lowered floor mini vans and double lowered floor area full size vans.

8. **Lap and Shoulder Belt (Type 2A) (Maintain pyrotechnic pretensioner when operating from w/c)**
(required when riding from w/c).

9. **Chest Belt – Imec or equivalent;**

10. **Belt-Type Unoccupied Wheelchair or Scooter Anchorage** for clients that transfer modify so client can use independently. Assess for power chair as well as manual.

11. **Driver's Seat** (built-in floor sockets for quick release seat at driver's station are required on lowered floor mini vans and double lowered front area full sized vans)

6-way power swivel adapted seat base

Support Platform for feet Extended Travel* (rear entry) Custom positioning seat base*

Grab bar at transfer site* Vinyl covered seat


Removable without use of tools with transfer wheels and separate lapbelt *determined by vendor fitting

12. **Windshield** with no tint band – available for full size Ford and Chrysler special order; will require extra length windshield wiper blades.

PRIMARY CONTROLS

An airbag on/off switch may be required if client is seated within the deployment zone. Airbag may have to be eliminated when modifying steering controls. NHTSA approval letter will be necessary in either case. Questions regarding airbag system should be directed to the vehicle modification vendor.

13. **Reduced Size Steering Wheel** (airbag and cruise control will have to be eliminated when modifying steering controls) (13" or smaller may require minimum effort steering) Deep Dish Size in inches: _____
14. **Steering Column Extension** to be determined by vendor fitting with the w/c & client in driving position. (3" lightweight maximum add on to end of column)
15. **Steering Device** Must have a removable retainer to allow the device to be removed whenever an able-bodied driver is using the vehicle (does not pertain to high tech. systems). The bearing "cuff" must be permanently mounted to the interior side of the steering wheel. Specialized steering system will require an appropriate weight device.
 Ball Grip/Spinner Tri-pin (assess for best location) Other: assess for possible revision to type of post coating to help with excessive wear on the pins

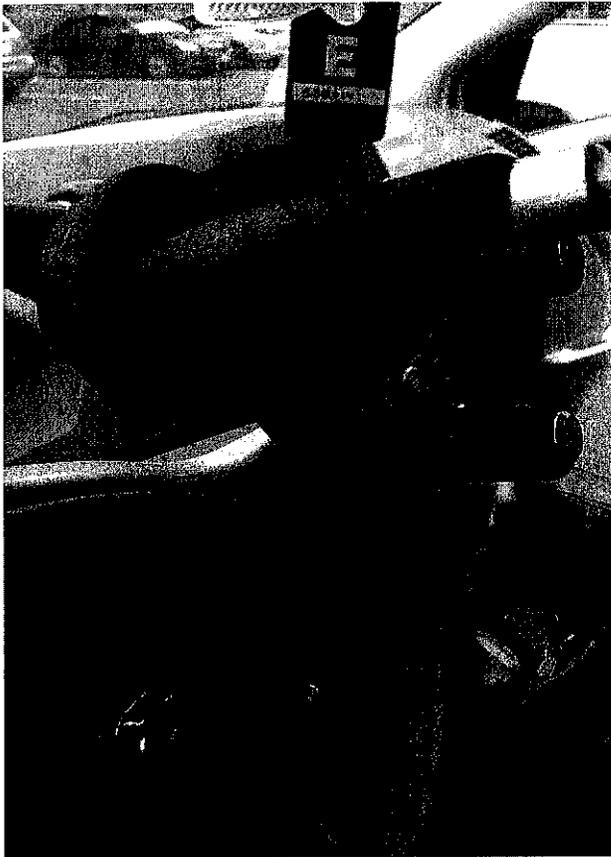

16. **Sensitized Steering** with automatic back up system. **BRS WILL ONLY PROVIDE THIS ON VANS.** Vehicles with minimum effort steering will require a counter balance opposite the bearing cuff. Not available on Toyotas.
 Low Effort (a.k.a. reduced effort) – approximately 30-60 ounces with factory wheel (varies with vehicles)
 Minimum Effort (a.k.a. zero effort) – approximately 10-30 ounces with factory wheel (varies with vehicles)

***** This was not trialed since it is not available in the car used for the assessment but given his diagnosis and complaint of right shoulder discomfort with combined internal rotation and forward flexion. Limited endurance prevented continued assessment to have him try the low effort steering in a minivan.**



17. **Specialized Steering System** - will require appropriate back-up system: _____

18. **Horizontal Steering** - will require sensitized steering (number of wheel turns from left/right = _____)

19. **Gear Shift Operation** Extended/Cross over Adapt shifter to eliminate need to depress button to shift, if applicable Electric with indicator of gear the transmission has been shifted into (must not shift unless brakes are applied)

20. **Reduced Effort Braking** (vehicles with vacuum boosted brakes only) with stop light indicator mounted within view of the operator and additional vacuum back up system will be installed. (Full sized vans will have double diaphragm vacuum booster installed. Vehicles with hydraulic boosted brakes will require a servo type hand control; see #21). Low Effort (a.k.a. reduced effort) - approx. 11 foot pounds (varies with vehicles) Minimum Effort (a.k.a. zero effort) – approx. 7 foot pounds or less (varies with vehicles)

21. **Hand Controls** (see #23 and 24) (knee bolster and knee airbag will need to be removed)
To be mounted on: left of steering column right of steering column
 Right-Angle Quad-Type * Right-Angle Para-Type * Push/Pull Twist/Push Push Rock
 Stop light indicator mounted within view of the operator May require off-set handle – vendor fitted
 Electric gas and brake (with automatic back up system indicating back up battery and alternative emergency brake application)
 Indicate motion: lateral forward/back Other (specify): _____
* Right angle hand control on 2012 Chryslers will have higher brake effort levels.

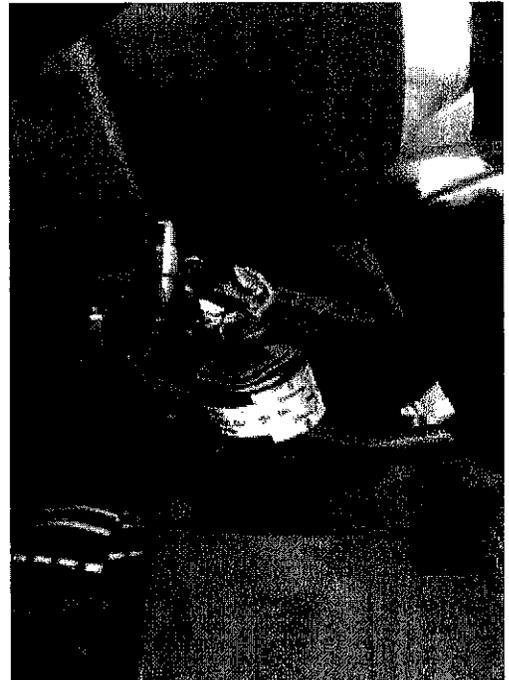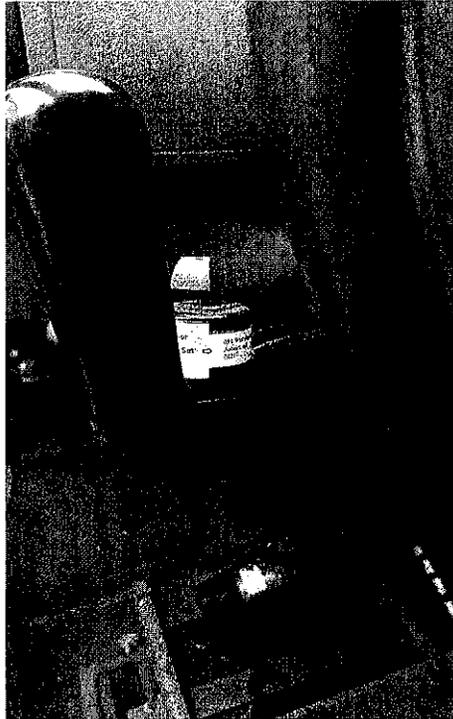

22. **Other Accelerator/Brake Controls**
 Left Foot Gas Pedal – with shield and feature to accommodate the able bodied driver
 Gas/Brake Shield (removable)
 Cruise (specify): _____
 Pedal Extensions (removable or fold-down when possible) _____

SECONDARY CONTROLS

- 23. **Headlight Dimmer Operation** see photo above
 On Hand Control (OEM should be maintained) Other (specify): _____
- 24. **Horn Operation** see photo above - duplicate set up on current vehicle (operated with lateral movement of the left hand on the hand control, button set up is perpendicular to hand control).
 On Hand Control (OEM should be maintained) Other (specify): _____
- 25. **Signal Light Operation** (Must self cancel) (OEM should be maintained)
 Remote add to the button on the hand control shaft and assess reaching capacity to ensure he can access
 Turn Signal Crossover Other (specify): If electronic devices are not able to be set up for safe reach he may need to be assessed for the use of a digi-switch
- 26. **Extended Dashboard Controls**
 Manual Electric _____
- 27. **Parking Brake**
 Electric Extended if foot operated
- 28. **Windshield Wiper Operation**
 Rain Tracker or equivalent if not included in OEM operations Other (specify): _____
- 29. **Windshield Washer Operation** (specify): _____
- 30. **Emergency 4-Way Flashers**
 Extended Remote
- 31. **Power Head Switch Pad With Ignition Interlock**
 Number of Buttons/Functions: _____

32. **Console** (Lowered floor minivans will come with pushbutton for ramp/door and kneeling functions)
All switches must be labeled as to function. Center console labels must be illuminated.

Check all that apply:

Location: Center Door Overhead Dashboard

Switch Type: Push Button (*PB) Toggle (*T) assess for degree of resistance and ability to operate (Specify for toggle below as needed) all dependent on location of switches and design of OEM for vehicle selected - will need fitting by vendor

Function: Backup System Headlights Lift/Ramp (PB) Wipers
 Airbag On/Off Heater/AC Blower Parking Brake (PB/T) Cruise *
 Dual battery (high tech only) Ignition Power Head Switch Pad Doors
 Electric Shift Power Windows Power mirrors Tiedown (PB)

* Add to Voice Scan or remote secondary control if steering wheel replaced

Temperature control (assess ability to manage OEM control switch) see photo of current adaptation that works for this consumer

Extensions on OEM
 Relocate OEM _____ Electronic Servo

Other: Cruise control - assess the switches included as the OEM operation; modify controls to ensure ability to control



33. **Ignition Control** - Vendor fitting for ability to operate OEM design based on location and style of ignition; may need Quad Key Turner if unable to manage key or if vehicle doesn't have feature of keyless start
 Keyless Quad Key Turner Remote Start (for High Tech Controls only, or client's expense)

PREPARATIONS

34. **Reposition of Passenger Seat** (built-in quick release sockets at right front passenger's position on lowered floor mini vans and double lowered floor full size vans) (seat belt shoulder strap must be relocated with seat)
 Additional quick release locations to be arranged for and paid for by client. For wheelchair drivers, dual purpose passenger seat with 2 arms and seat belt stalks on each side.

Original Location: Right Front Center Rear
 New Location: To rear most portion of vehicle To center of vehicle Remove
 Bench Bucket

35. **Wheelchair Subfloor** covered with commercial grade color coordinated carpet or TRF at client's preference, with edging trim.
 1/2" Plywood (raised roof, no lowered floor)
 Carpet Carpet with translucent rigid carpet protector
 Transit Rubber Flooring

36. **Instructor's Brake System** to be removed upon licensing. Must be mounted on firewall or bracket parallel to firewall. Client will need to contact vendor for removal.
 Cable Other (explain): _____

37. **Outside Mirror(s)**
 3" Convex Cross-Over Mirrors _____ Spot _____

38. **Wide Angle Viewers**
 Rectangle Rear Window - for backing Windshield Strip - for viewing overhead signals
 Object Detection Backing System (factory order when available)
 Camera backing system


39. **Interior Mirror**
 Wide Angle Other: _____

40. **Back Up Battery System** - dual battery, capable of starting vehicle for high tech vehicles

Was the client road tested? Yes No

Vehicle Used: _____ Assessed in current van for proper equipment _____ Results: Successful

Comments: Will need to have vendor assess for access to left side forearm support on the door since he relies on this support to operate his current vehicle. Photo reflects the degree of support needed. May need to build up a support system to provide trunk support. Depending on style of seat it may be necessary to design a right sided forearm support as well as he does report increased episodes of muscle fatigue with longer drives.

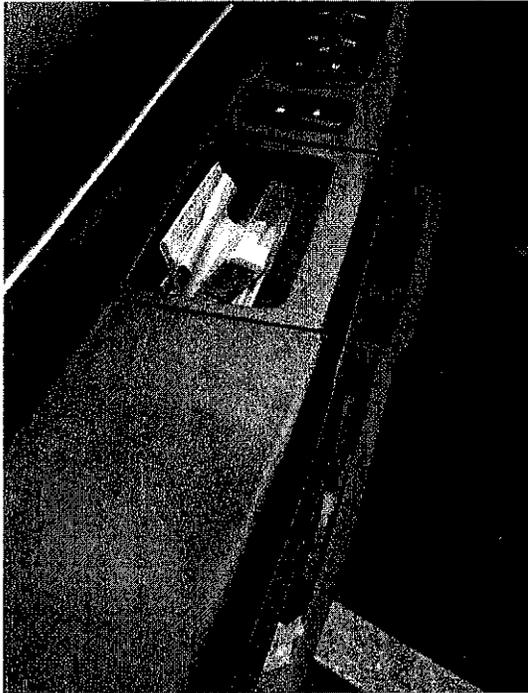

IN ADDITION TO THE ITEMS INCLUDED IN THIS REPORT, IT IS RECOMMENDED THAT CLIENT'S CONSIDER THE FACTORY OPTIONS BELOW. NOTE THAT BRS IS NOT RESPONSIBLE FOR FUNDING THESE EXTRA OPTIONS.

AAA Plus (extended distance towing package)
Air conditioning
Alternator (heavy duty)
Automatic load leveling system
Automatic Transmission (with overdrive if available)
Backing Object Detection System (typically available on high end packages)
Battery (heavy duty, maintenance-free)
Citizen band or cellular phone (emergency communication system)
Cruise control
Door locks (power)
Dual battery
Factory power slide door
Front stabilizer bar
Glass (all-around)
Glass, tinted (privacy glass)
Insulation of walls and doors

Revised 3/2013

NOTE TO CLIENTS: The mid bench/seats floor quick disconnect and floor inserts will normally be removed. Unless approved in writing within the van evaluation report by the state, the costs of reconnection of the quick release mid bench/seats will be the responsibility of the client and not the state or the modification vendor. The client is responsible to order any changes from the modification vendor prior to drop shopping their vehicle to the vendor's modification manufacturer's site, and is fully responsible to pay for them at the time of delivery.

Your new vehicle tires may not provide maximum performance. After-market tires with superior performance are available at your expense.

The lowered floor minivan modification may change the handling characteristics from that of an unmodified van.

For high tech vehicles, maintenance costs can be expensive. Please refer to your Voc Rehab policy regarding maintenance of the equipment.

Clients (especially those with impaired sensation) are recommended to have their vehicle modifier disable heated seat and/or heated steering wheel functions. Malfunctions may result in severe burns.

Note that approved vendors and equivalent systems/equipment are determined by the funding source.

Interior trim package
Lighter (cigar) (Power Point)
Maximum GVW for 3/4 ton van (8,600 lbs.)
Mirrors, power heated
Power hatch
Rear window defogger (if available)
Remote start (not for "0" effort steering)
Run-flat tires
Springs (heavy duty)
Steering wheel (tilt)
Spare tire and wheel – full size
Super duty cooling package


NOTE TO VENDORS: Any motor vehicle which is equipped with adaptive equipment pursuant to a contract awarded as the result of a bid submitted in response to this prescription is subject to and must pass inspection and testing, including test driving, by the consulting automotive engineer selected by the Bureau of Rehabilitation Services to determine that the vehicle conforms to the specifications in such contract and is equipped for safe highway operation. Inspection of said vehicle and corrections found necessary shall be completed before payment is made to the vendor and before delivery is made to the client.

Vendors must contact clients for a fitting and/or obtain pertinent information before modification work is begun and/or completed. Vendor must familiarize client and significant others in the proper use and operation of all adaptive equipment.

It is recommended, upon receiving your vehicle following conversion, that you contact the Driver Training Program (DTP) of the DORS at 1-800-537-2549 and arrange to have a DTP representative familiarize you with the complete operation of your vehicle and to complete any necessary training. **Drivers new to their adaptive equipment must contact the DTP at 1-800-537-2549 for training and/or licensing.** The instructor's brake system is to be removed upon licensing. The client is responsible for contacting the vendor for removal.

When insuring your vehicle, a copy of this report should be provided to your insurance company to obtain appropriate coverage.

THIS DOCUMENT IS A PRESCRIPTION ONLY AND IS NOT APPROVAL FOR CLIENT TO PURCHASE VEHICLE OR EQUIPMENT. FUNDING SOURCE MAY NOT PAY FOR ALL ITEMS IN THIS REPORT. ANY CHANGES TO THIS PRESCRIPTION MUST BE APPROVED IN WRITING.



Joan Cramer, MS, OT/L, DRS
Driver Rehabilitation Specialist
Mobility Center Director
(203) 630-2208 (203) 634-0341 (fax)

Copies: BRS

Manual WHEELCHAIR INFORMATION


ALL DIMENSIONS IN INCHES UNLESS NOTED

Client 21619 Date of Assessment May 13, 2016

Make: Quickie 2 Model: SN

Year Issued: 2016 Weight of chair lbs Cushion Thickness

Type of Footrests (X) Split or () Continuous Additional Features () Recline () Tilt in Space () Seat Elevate
 () Solid or (X) Removable () Joystick Right Left

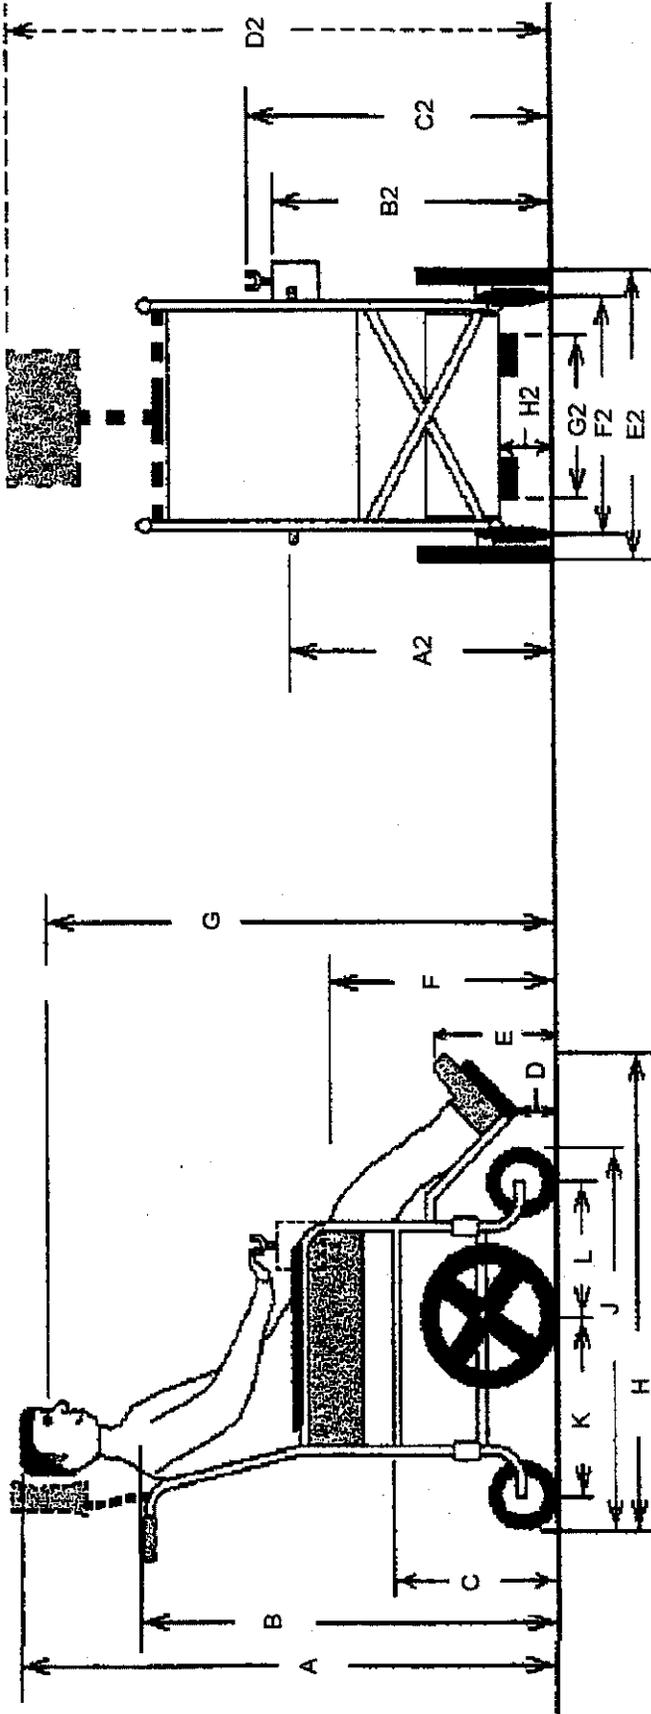

A	52"	D	2.5"	G	J	A2	E2
B	41.5"	E	8"	H	K	B2	F2
C		F	25"	I	L	C2	G2
						D2	H2

COMMENTS 17" outer knee to knee 16" back seat from floor 19" front seat 23" seat depth

Quick Release wheels.