

PHASE A



1 3RD FLOOR SOUTH
1/8" = 1'-0"

SYMBOL LEGEND - FURNITURE POWER / DATA

- DATA / VOICE NEEDED LOCATION: ELECTRICAL CONTRACTOR TO PROVIDE WALL MOUNTED J-BOX AND CONDUIT. AS REQUIRED, FOR DATA/PHONE SERVICE. DATA CABLING TO BE INSTALLED BY OWNERS CABLING VENDOR WITH SYSTEMS FURNITURE. FURNITURE VENDOR TO COORDINATE WITH OWNERS CABLING VENDOR.
- FURNITURE POWER NEEDED LOCATION: ELECTRICAL CONTRACTOR TO PROVIDE WALL MOUNTED J-BOX AND CONDUIT. AS REQUIRED, FOR ELECTRICAL SERVICES. FURNITURE VENDOR TO PROVIDE WIRING/WORK. ELECTRICAL CONTRACTOR TO MAKE CONNECTIONS. FURNITURE VENDOR TO COORDINATE WITH GIGS.
- NEW FURNITURE SYSTEM DATA RECEPTICAL
- OVER FLOOR RACEWAY LOCATION (DEVICES & CONNECTIONS BY EC)


KEY NOTES: FURNITURE

1. PROVIDE WS-04 FOR PHASE A, RECONFIGURE OR REMOVE AS REQUIRED BY ALTERNATE ACCEPTANCE AND AS DIRECTED BY THE OWNER IN SUBSEQUENT PHASE.
2. PROVIDE WS-03 FOR PHASE A, RECONFIGURE OR REMOVE AS REQUIRED BY ALTERNATE ACCEPTANCE AND AS DIRECTED BY THE OWNER IN SUBSEQUENT PHASE.
3. PROVIDE WS-01 FOR PHASE A, RECONFIGURE OR REMOVE AS REQUIRED BY ALTERNATE ACCEPTANCE AND AS DIRECTED BY THE OWNER IN SUBSEQUENT PHASE.
4. PROVIDE WS-02 FOR PHASE A, RECONFIGURE OR REMOVE AS REQUIRED BY ALTERNATE ACCEPTANCE AND AS DIRECTED BY THE OWNER IN SUBSEQUENT PHASE.

GENERAL NOTES: FURNITURE

1. THIS IS A PHASED PROJECT. SEE ALSO THE PROJECT MANUAL.
2. MAIL ROOM EQUIPMENT, OFFICE EQUIPMENT (COPIERS, FAXES, ETC.), COMPUTER EQUIPMENT ARE BY OTHERS.
3. COORDINATE TEMPORARY ON-SITE STORAGE LOCATIONS WITH THE DESIGN BUILDER SO AS NOT TO IMPEDE THE PROGRESS OF THE PROJECT.
4. IT IS NOT THE INTENT OF THESE DRAWINGS TO SHOW EVERY PART AND PIECE TO BE PROVIDED. THE FURNITURE VENDOR SHALL PROVIDE WORKSTATIONS AND PRIVATE OFFICE SUITES OF FURNITURE AS NOTED IN THE PROJECT MANUAL AND HEREIN. A SUITE OR WORKSTATION SHALL INCLUDE ACCESSORY COMPONENTS. ACCESSORY COMPONENTS INCLUDE BUT ARE NOT LIMITED TO OVERHEADS, TASK BOARDS, PENCIL DRAWERS, WIRE MANAGERS, TASK LIGHT, FILE RAILS, ETC. IT IS THE FURNITURE CONTRACTORS RESPONSIBILITY TO PROVIDE A COMPLETE INSTALLATION.
5. THE FURNITURE VENDOR SHALL COORDINATE WITH THE ELECTRICAL CONTRACTOR WHERE NEW SERVICE WILL BE PROVIDED.
6. ELECTRICAL CONTRACTOR WILL PROVIDE 2 CIRCUITS PER SIX STATIONS UNLESS OTHERWISE NOTED.
7. FURNITURE VENDOR SHALL PROVIDE ATTIC STOCK EQUIVALENT TO ONE STATION OF EACH TYPICAL SIZE FOR STORAGE ON-SITE, ENSURING A SELECTION OF PARTS FROM EACH UNIQUE FURNITURE SYSTEM FOR FUTURE RECONFIGURATIONS. (INCLUDE CONNECTORS, TRIM, WIRES, POWER POLES, ETC.)
8. PRESERVE AND PROTECT ALL FLOOR, WALL AND CEILING FINISHES IN AREAS OF FURNITURE INSTALLATION.
9. THE SYMBOL **XX-XX** REFERS TO TYPICAL FURNITURE WORKSTATIONS AND PRIVATE OFFICE SETS. SEE ALSO PROJECT MANUAL FOR SPECIFICATIONS.
10. VENDOR TO DETERMINE (AND INCLUDE ASSOCIATED COST IN THEIR QUOTE) QUANTITIES FOR POWERED PANELS REQUIRED FOR THIS INSTALLATION BASED ON THE INFORMATION PROVIDED IN THE FURNITURE PHASING PLANS INCLUDED IN THIS APPENDIX.

APPENDIX II

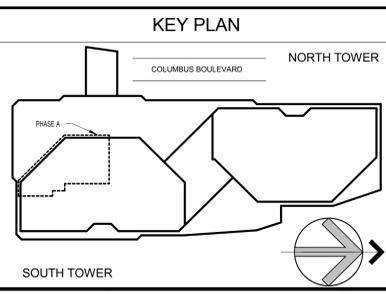

Drawing Title: PROTOTYPE PLAN		CAPITAL REGIONAL DEVELOPMENT AUTHORITY FOR THE STATE OF CONNECTICUT	
Revisions		Plans Prepared By:	Date: 04/17/15
No.	Date	Description	Scale: 1/8" = 1'-0"
1	04/29/15	Revision 1	Production Leader: DW
		Project:	Project Manager: KK
		Project Address: ML	
		Peer Reviewer: TEO	
		Drawing Number: PHASE A	
BIM Number: BI-2B-358/372-FFE-1		Project Number: BI-2B-358 & BI-2B-372	