

UConn HEALTH

Signage Package Type 1

Mark	Description	Date

Contents

Finish Schedule	G3.FSa
Typographic Style Guide	G3.TSa
Symbol Style Guide	G3.SSa - .SSb
Map Style Guide	G3.MSa

Building Interior

W Series/Wayfinding

W1 Primary Directory - Wall Mount	G3.W1a - .W1b
W2-W3 <i>not used</i>	
W4 Area Directory	G3.W4a - .W4b
W5 Elevator Bank Directory	G3.W5a - .W5b
W6 Overhead Suspended Directional	G3.W6a
W7 Wall Mounted Directional	G3.W7a - .W7b
W8 Freestanding Directional	G3.W8a

D Series/Destination

D1 <i>not used</i>	
D2 Elevator Bank Identity	G3.D2a
D3 Primary Destination Identity	G3.D3a - .D3b
D4 Secondary Destination Identity	G3.D4a - .D4c
D5 Tertiary Destination Identity	G3.D5a - .D5c
D6 Restroom / Stair Identity	G3.D6a - .D6b
D7 Patient Room Identity	G3.D7a - .D7b
D8 Core Room Identity - Plaque	G3.D8a
D9 Door Tag Room Number Plaque	G3.D9a
D10 Flag Identity	G3.D10a - .D10d

M Series/Message

M1 Regulatory Plaque	G3.M1a - .M1b
M2 Regulatory Plaque - Door Mount	G3.M2a
M3 Regulatory Vinyl	G3.M3a - .M3b
M4 Operational Plaque	G3.M4a - .M4b
M5 Inside Stair Identification	G3.M5a

Mark	Description	Date

Paint Colors

Black (P1)
Benjamin Moore:
#2126-10 Black Tar



White (P2)
ICI:
#815 Natural White



Grey (P3)
Match 3M Opaque:
#220-101 Nimbus Grey



Champagne (P4)
Mathews:
#MP 2006O Champagne



Clinic Area Green (P5)
ICI:
#3061 Southern Pine



Academic / Research Area Blue (P6)
Benjamin Moore:
#2065-10 Admiral Blue



Hospital Area Burgundy (P7)
Benjamin Moore:
#2094-10 Burnt Cinnamon



Emergency Red (P8)
Benjamin Moore:
#2086-10 Exotic Red



Yellow (P9)
Benjamin Moore:
#2021-20 Lemon



Orange (P10)
ICI:
#502 Spice Orange



Green (P11)
ICI:
#939 Crayon Green



Purple (P12)
Benjamin Moore:
#2071-20 Gentle Violet



UCONN Blue (P13)
PMS:
281c



UCONN Grey (P14)
PMS:
Cool Grey 10



Vinyl Colors

Black (V1)
3M Opaque:
#7725-12 Black



White (V2)
3M Opaque:
#7725-10 White



Blue (V3)
3M Opaque:
#7725-36 Sapphire Blue



Red (V4)
3M Opaque:
#7725-13 Tomato Red



Grey (V5)
3M Opaque:
#7725-151 Traffic Grey



Mark	Description	Date

Myriad Pro Bold Condensed
Wayfinding & Overhead Identity Signage

ABCDEFGHIJKLMNOPQRSTUVWXYZ
abcdefghijklmnopqrstuvwxyz 123456789 .,/”

Myriad Pro Condensed
Destination Signage

ABCDEFGHIJKLMNOPQRSTUVWXYZ
abcdefghijklmnopqrstuvwxyz 123456789 .,/”

Myriad Pro Bold
Wayfinding & Overhead Identity Signage

ABCDEFGHIJKLMNOPQRSTUVWXYZ
abcdefghijklmnopqrstuvwxyz 123456789 .,/”

Myriad Pro Semibold
Exterior & Destination Signage

ABCDEFGHIJKLMNOPQRSTUVWXYZ
abcdefghijklmnopqrstuvwxyz 123456789 .,/”

Myriad Pro Regular
Destination Signage

ABCDEFGHIJKLMNOPQRSTUVWXYZ
abcdefghijklmnopqrstuvwxyz 123456789 .,/”

Adobe Garamond Pro Bold
Message Signage

ABCDEFGHIJKLMNOPQRSTUVWXYZ
abcdefghijklmnopqrstuvwxyz 123456789 .,/”

Adobe Garamond Pro Semibold
Recognition Signage

ABCDEFGHIJKLMNOPQRSTUVWXYZ
abcdefghijklmnopqrstuvwxyz 123456789 .,/”

Mark	Description	Date

(INFO)
Information




(YAH)
Your Are Here



(EMER)
Emergency



Arrow



Arrow



(NM)
No Metal



(NP)
No Parking



(W)
Women



(M)
Men



(WM)
Restroom



(HC)
Accessibility



(HC)
Accessibility




(FS)
Fire Stair



(TWT)
Two Way Traffic



(RAD)
Radiation



(BIO)
Biohazard



(FE)
Fire Extinguisher



(FOOD)
Restaurant



(MAG)
Magnet



(ST)
Stair



(FEV)
Fuel Efficient Vehicle



(NCP)
No Cell Phone




(NS)
No Smoking



(NW)
No Weapons



(NE)
Do Not Enter



(LRG)
Magnification



(NP)
No Pacemaker



(TDD)
Text Communication



Mark	Description	Date


(FEV)
Fire Equipment Valve



(MG)
Medical Gas



(AED)
Automatic Defibrillator



(AA) Academic
Area Identity



(AMB)
Ambulance



(HA) Hospital
Area Identity



(VE)
Vending





(CA) Clinic
Area Identity



Mark	Description	Date

Exhibit C Drawings and Specifications

Dimensions & shapes of all elements as shown on G3.W1a thru G3.W1b.

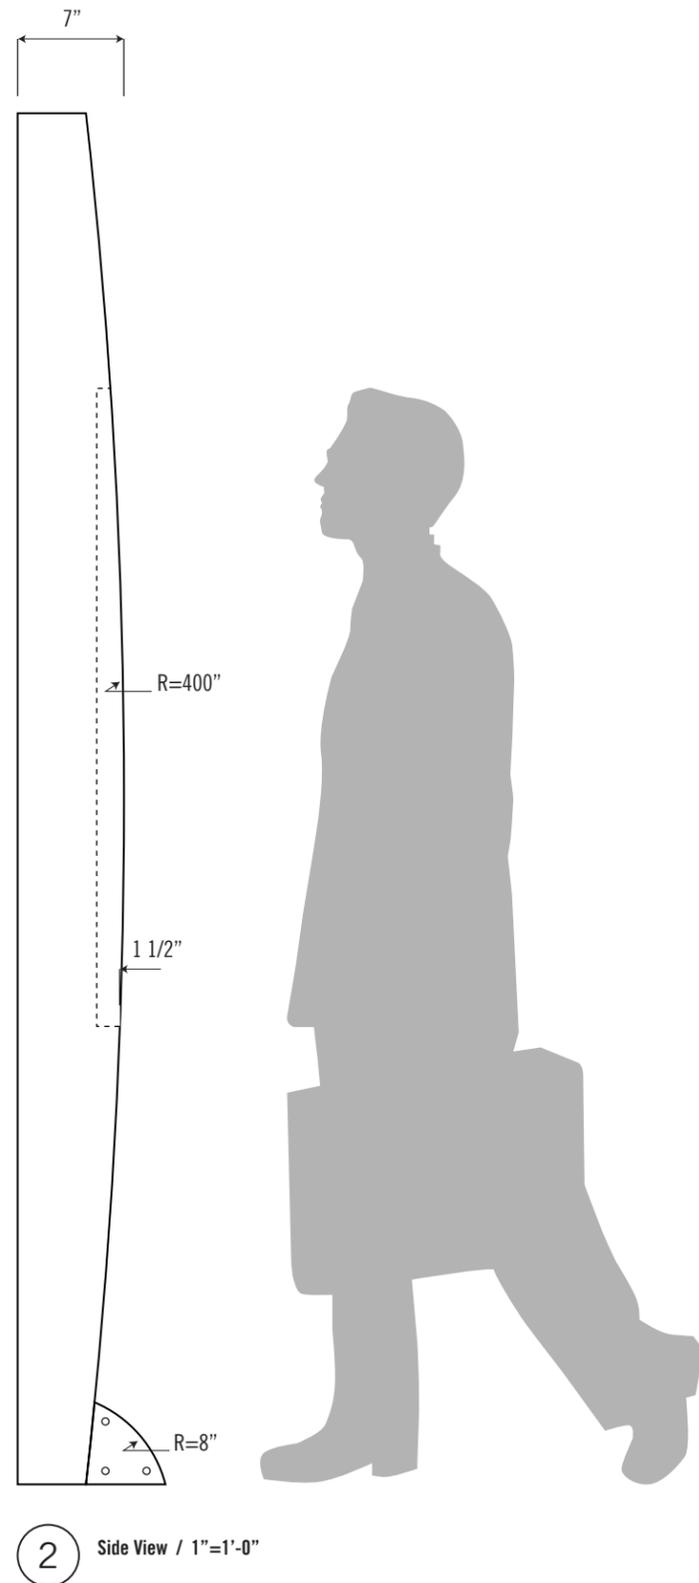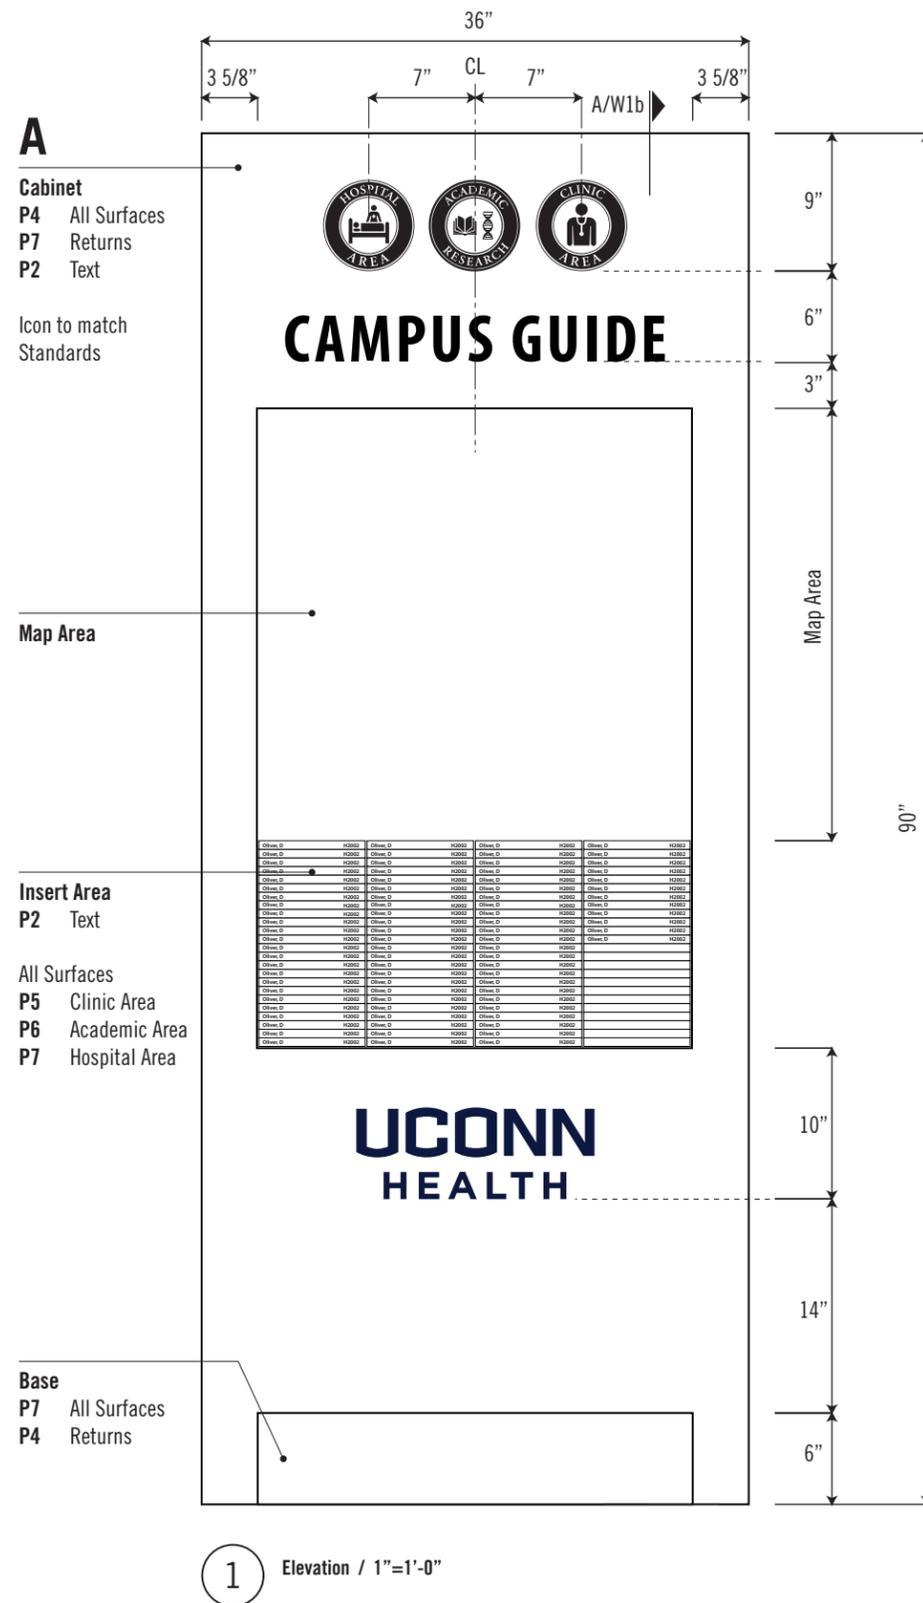

A Cabinet:
Fabricated form of 1/8" Aluminum (minimum) with internal structure as required. Continuous weld all seams, grind and buff smooth. Paint finished. Concealed mounting bracket, secured to wall. Concealed mechanically mount cabinet to bracket. Survey existing conditions. Screen print graphics to first surface.

Typography:
Inserts: Myriad Pro Semibold, 1/4" Cap Height, Use Myriad Pro Regular for Level and Room Number. "Campus Guide": Myriad Pro Bold Condensed, 3" Cap Height. Icons are 6" Height.

Symbols:
6" Height.

Map & Insert Area:
APCO Accord15 modular sign system components (molded multiclip & Aluminum Sign Band). Paint finished. Apply 3M computer-cut vinyl graphics to first surface.



Base:
1/8" Aluminum Mounting Cover Form, installed under face panel for seamless appearance. Countersunk screws at side to secure. 1/4" Aluminum Mounting Base Plate, welded to Structure.

Installation:
Concealed mechanical attachment to wall and floor. Ensure assembly is secured, plumb and level.

Structural Engineering:
REQUIRED. Provide sealed structural engineering drawings and calculations per requirements of Project Specifications.

Mark	Description	Date

Dimensions & shapes of all elements as shown on G3.W1a thru G3.W1b.

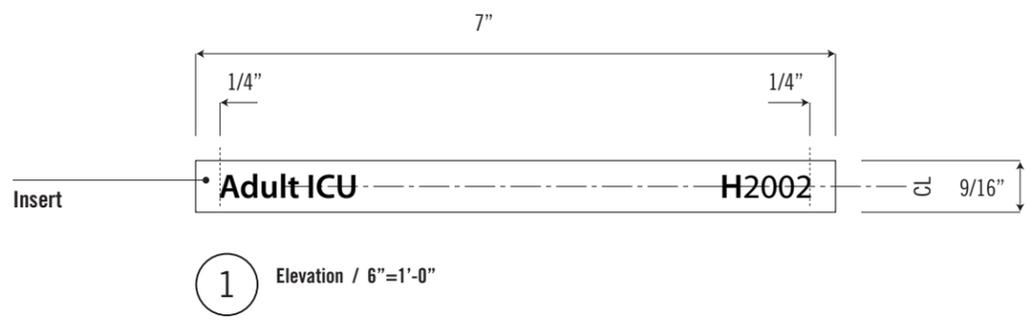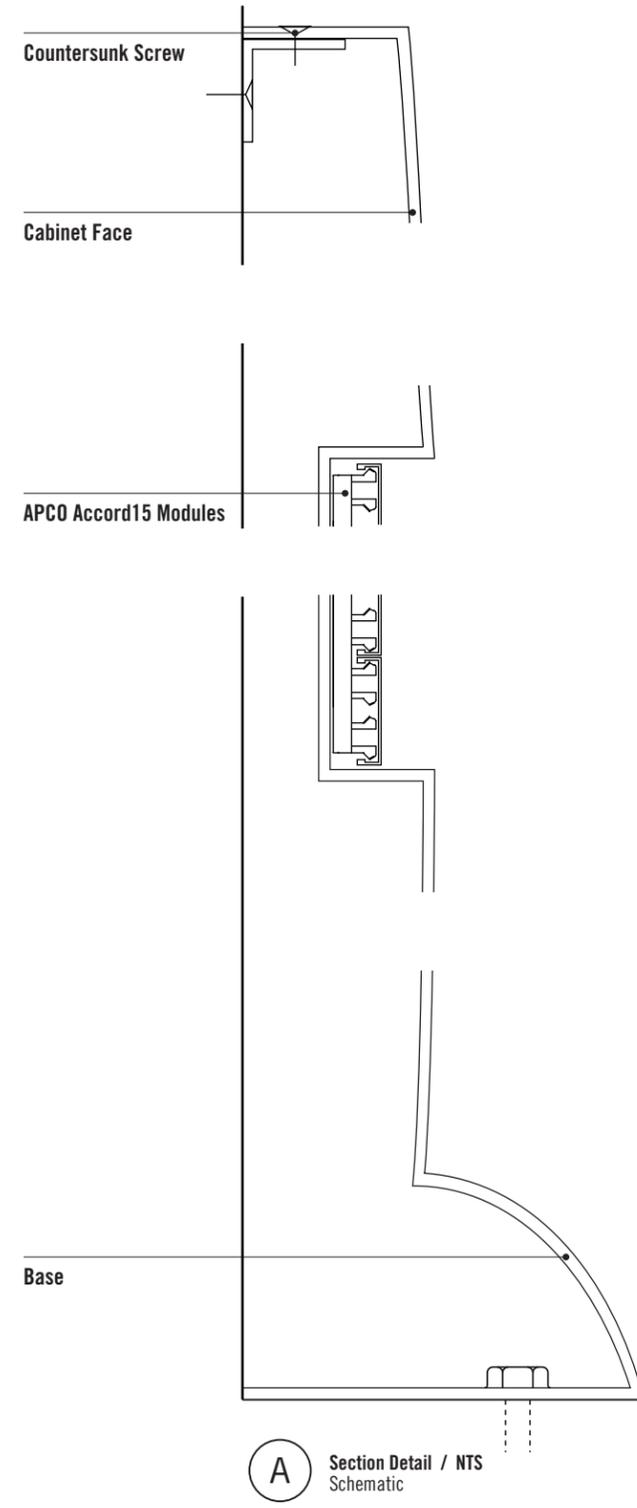

Mark	Description	Date

Dimensions & shapes of all elements as shown on G3.W4a thru G3.W4b.

A Cabinet:
Fabricated form of 1/8" Aluminum (minimum) with internal structure as required. Continuous weld all seams, grind and buff smooth. Paint finish all surfaces as indicated. Screen print graphics to first surface.

Symbol:
3" Height.


Inserts:
APCO Accord15 modular sign system components (molded multiclip & Aluminum Sign Band). Paint finished. Apply 3M computer-cut vinyl graphics to first surface.

Typography:
Myriad Pro Semibold, 3/8" Cap Height. Use Myriad Pro Regular for level number.


Icon Form:
Fabricated form of 1/8" Aluminum (minimum) with internal structure as required. Continuous weld all seams, grind and buff smooth. Paint finish all surfaces as indicated. Screen print graphics to first surface. Concealed mechanical attachment to Cabinet.

Installation:
Concealed mechanical attachment to wall. Ensure assembly is secured, plumb and level.


Structural Engineering:
REQUIRED. Provide sealed structural engineering drawings and calculations per requirements of Project Specifications.

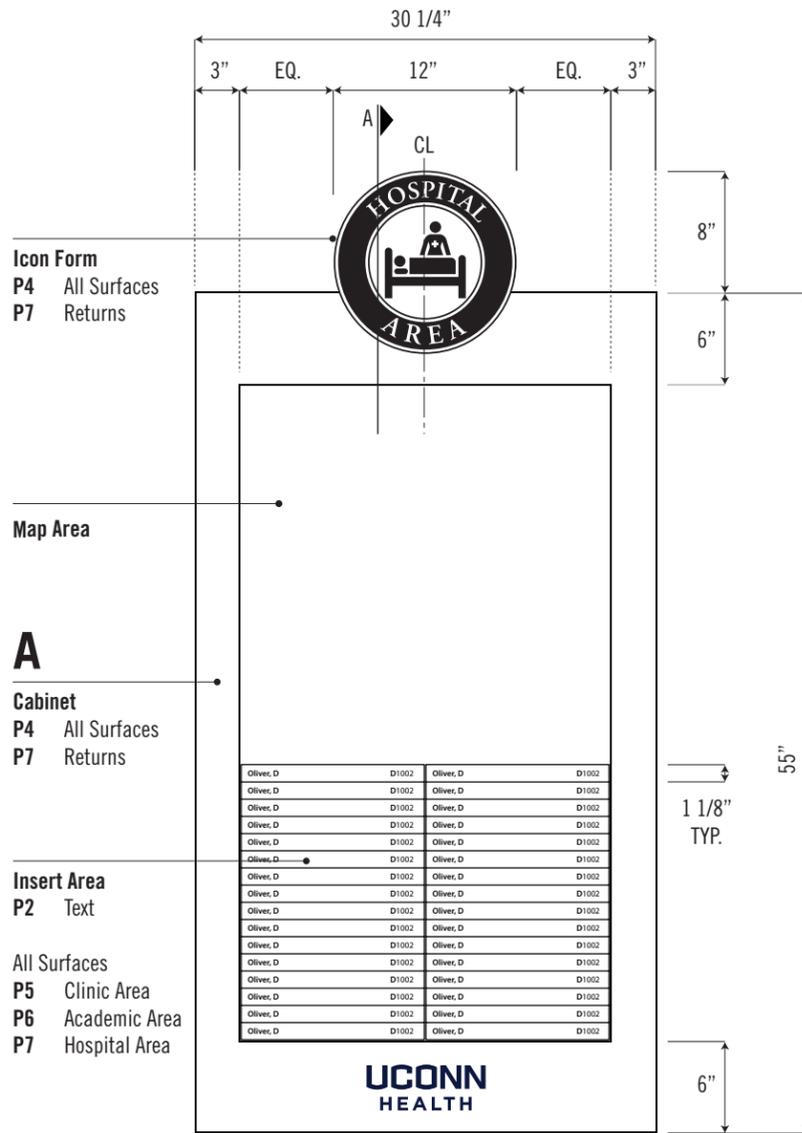

1 Elevation / 1" = 1'-0"

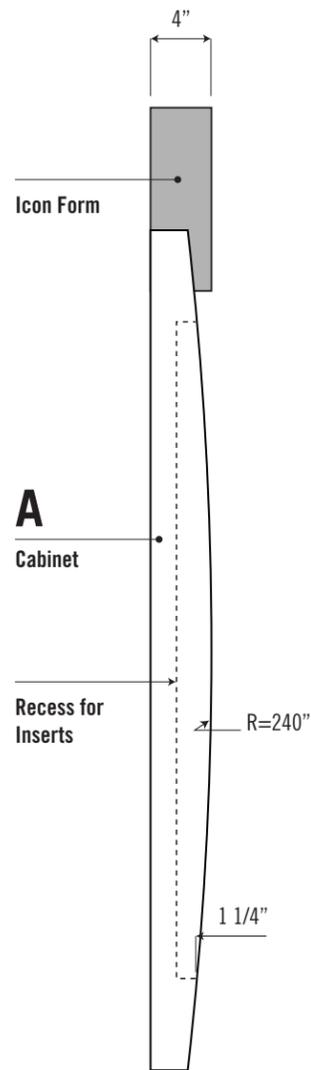


2 Side View / 1" = 1'-0"

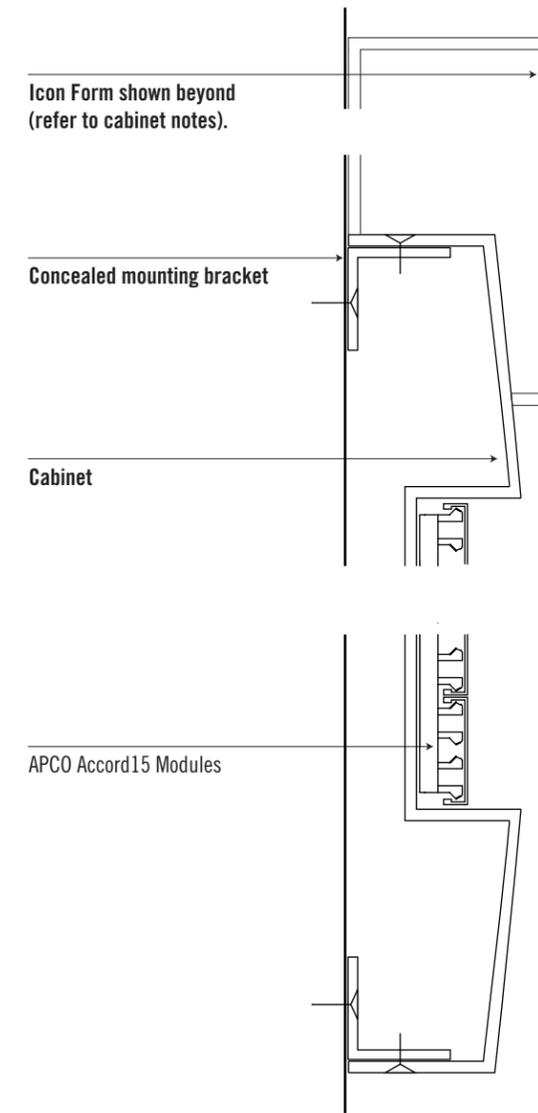


A Section Detail / NTS Schematic

Mark	Description	Date

Dimensions & shapes of all elements as shown on G3.W4a thru G3.W4b.

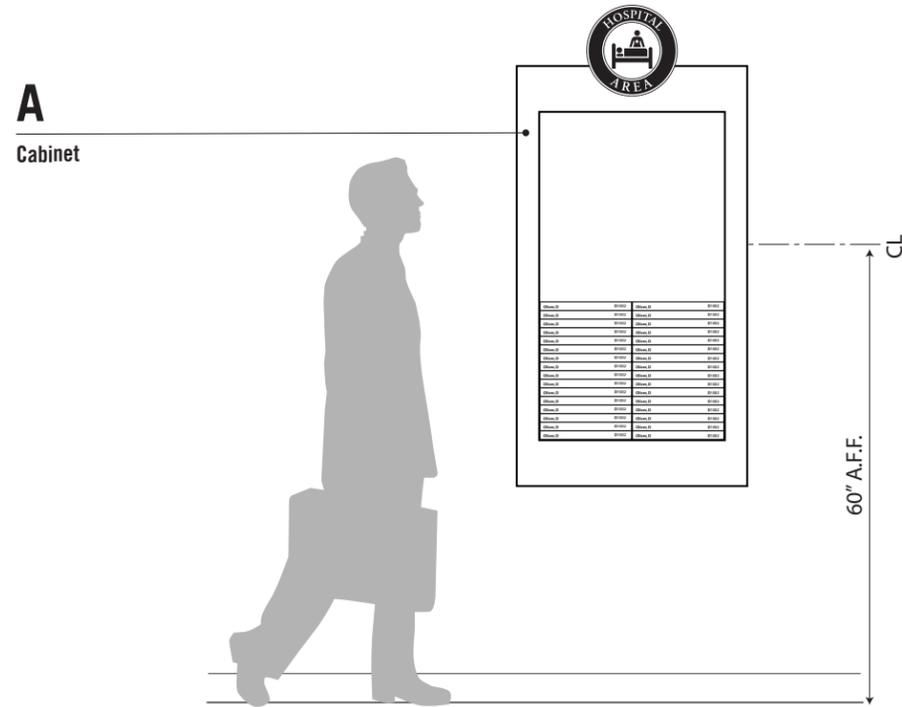

2 Elevation / 1/2" = 1'-0"

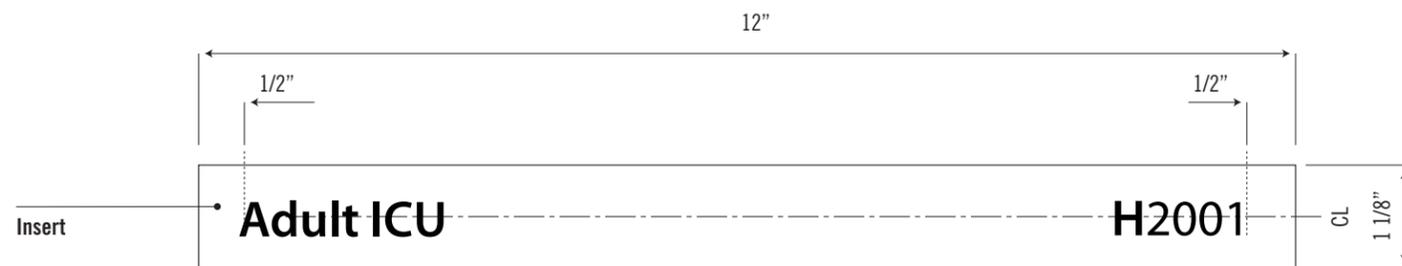

1 Elevation / Half Size

Mark	Description	Date

Dimensions & shapes of all elements as shown on G3.W5a thru G3.W5b.

A Cabinet:
Fabricated form of 1/8" Aluminum (minimum) with internal structure as required. Continuous weld all seams, grind and buff smooth. Paint finish all surfaces as indicated. Screen print graphics to first surface.

Symbol:
2" Height.


Inserts:
APCO Accord15 modular sign system components (molded multiclip & Aluminum Sign Band). Paint finished. Apply 3M computer-cut vinyl graphics to first surface.

Typography:
Myriad Pro Semibold, 3/8" Cap Height. Use Myriad Pro Regular for level number.


Icon Form:
Fabricated form of 1/8" Aluminum (minimum) with internal structure as required. Continuous weld all seams, grind and buff smooth. Paint finish all surfaces as indicated. Screen print graphics to first surface. Concealed mechanical attachment to Cabinet.

Installation:
Concealed mechanical attachment to wall. Ensure assembly is secured, plumb and level.


Structural Engineering:
REQUIRED. Provide sealed structural engineering drawings and calculations per requirements of Project Specifications.

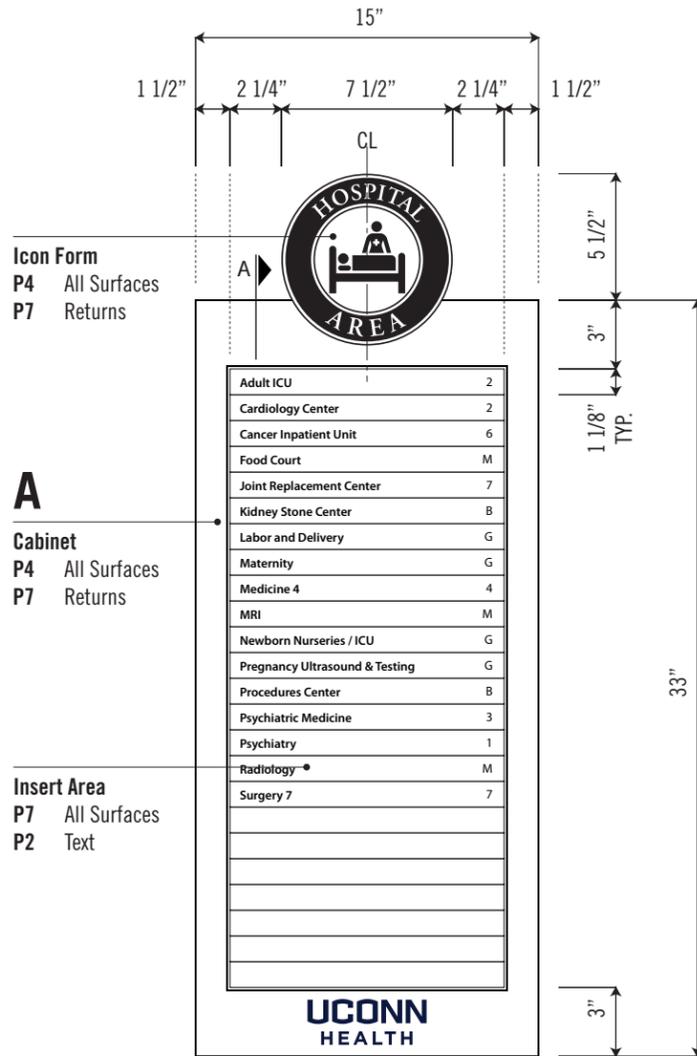

1 Elevation / 1 1/2" = 1'-0"

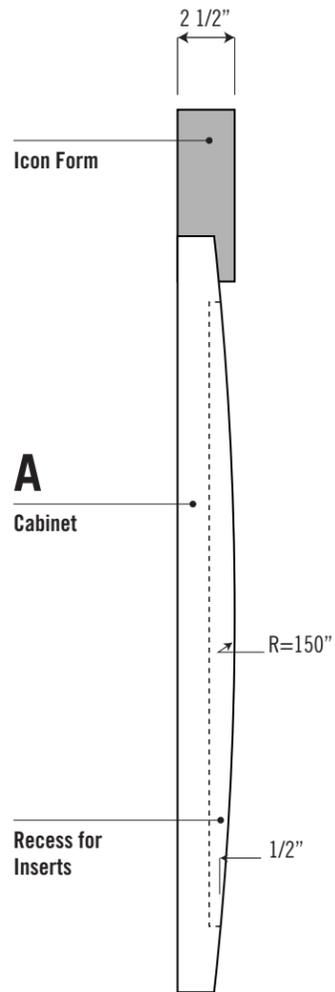


2 Side View / 1 1/2" = 1'-0"

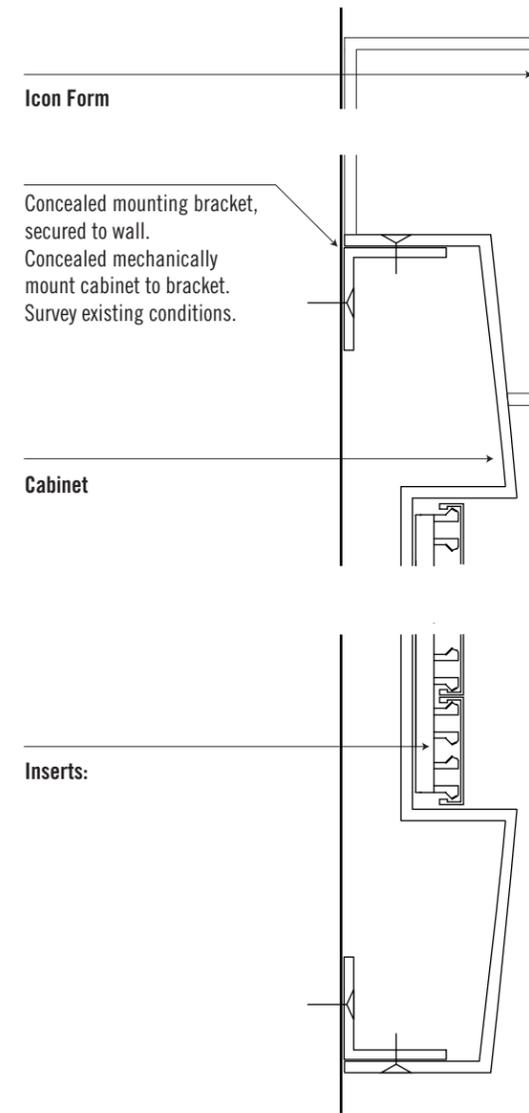


A Section Detail / 1 1/2" = 1'-0" Schematic

Mark	Description	Date

Dimensions & shapes of all elements as shown on G3.W5a thru G3.W5b.

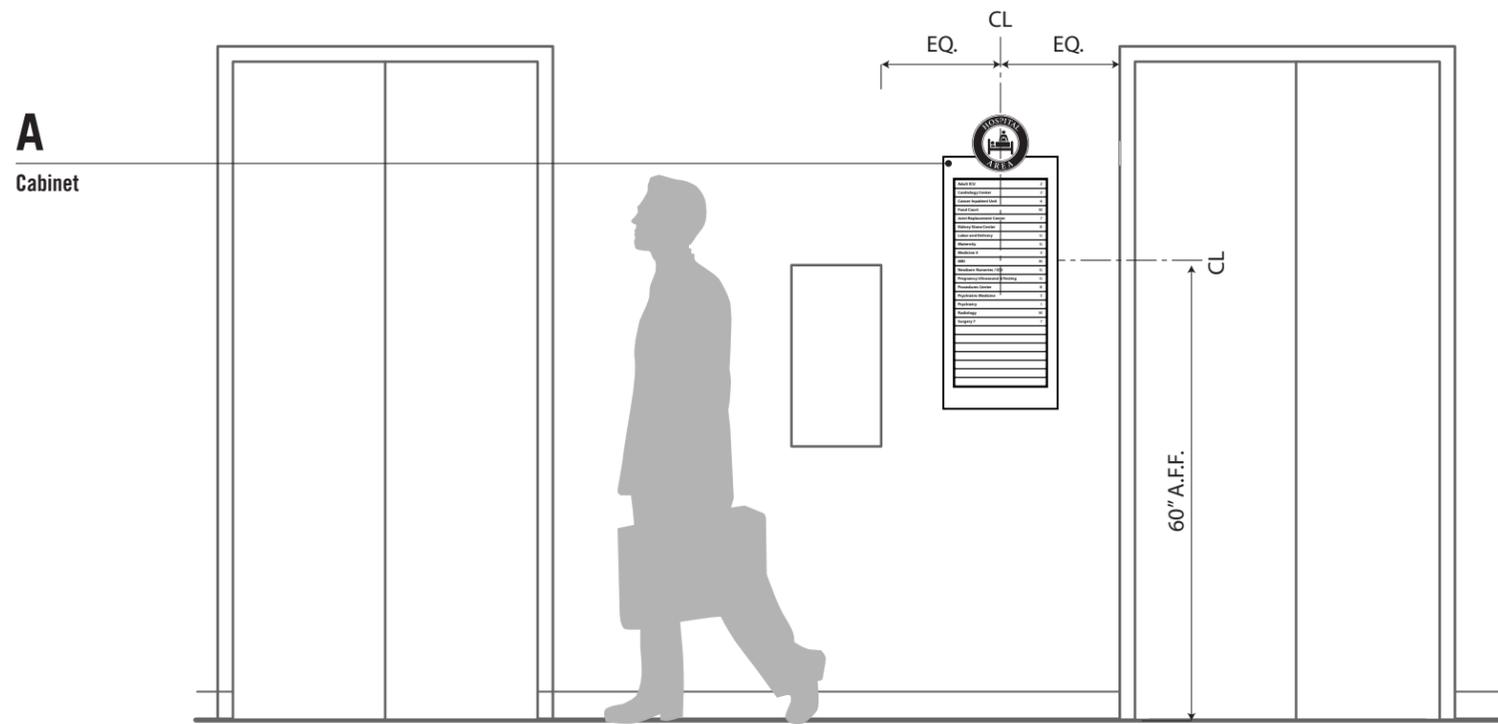


2 Elevation / 1/2" = 1'-0"

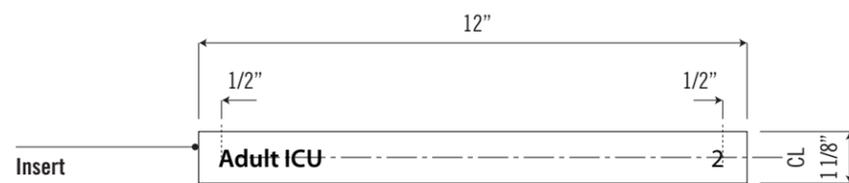


1 Elevation / 1 1/2" = 1'-0"

Mark	Description	Date


Dimensions & shapes of all elements as shown on G3.W6a.

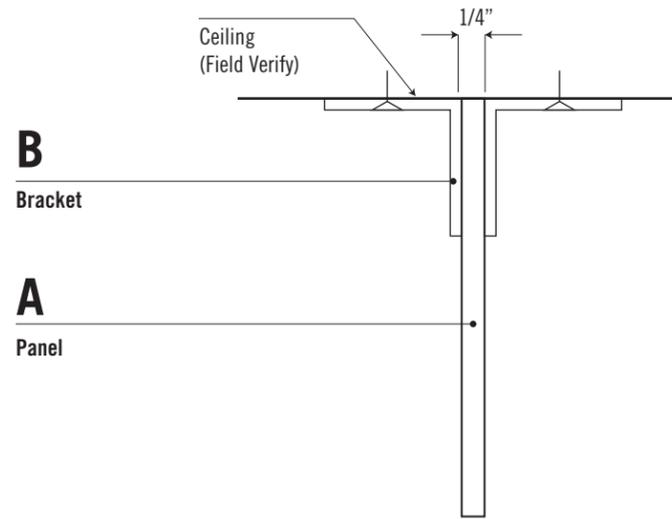


A Section Detail / 3/4" = 1'-0" Schematic

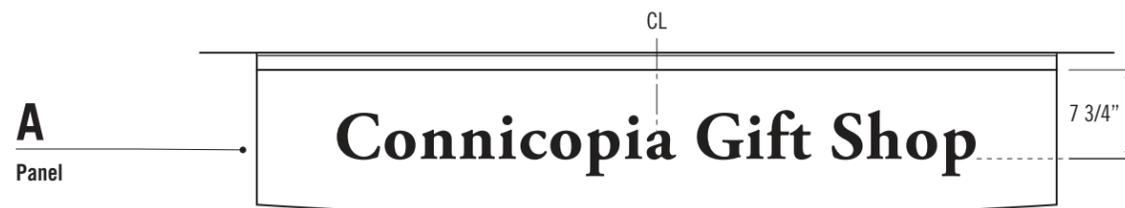

2 Elevation / 3/4" = 1'-0" Style B - Alternate Layout

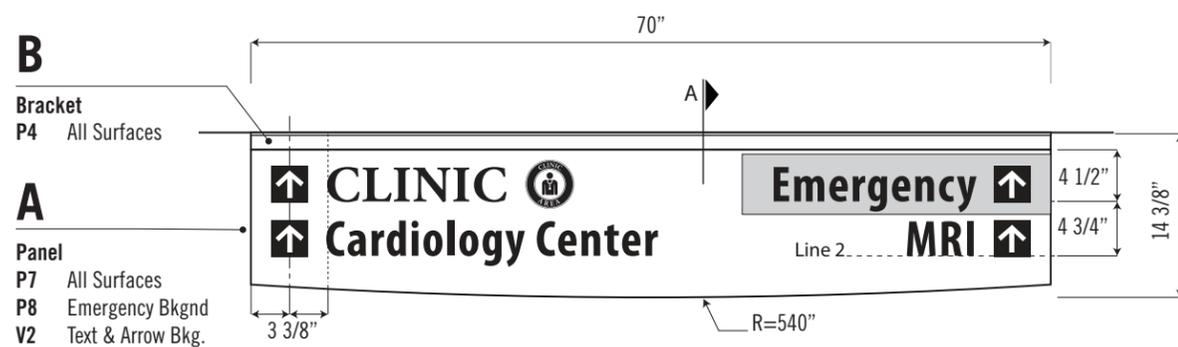

1 Elevation / 3/4" = 1'-0" Style B
Icon: Match Icon Color

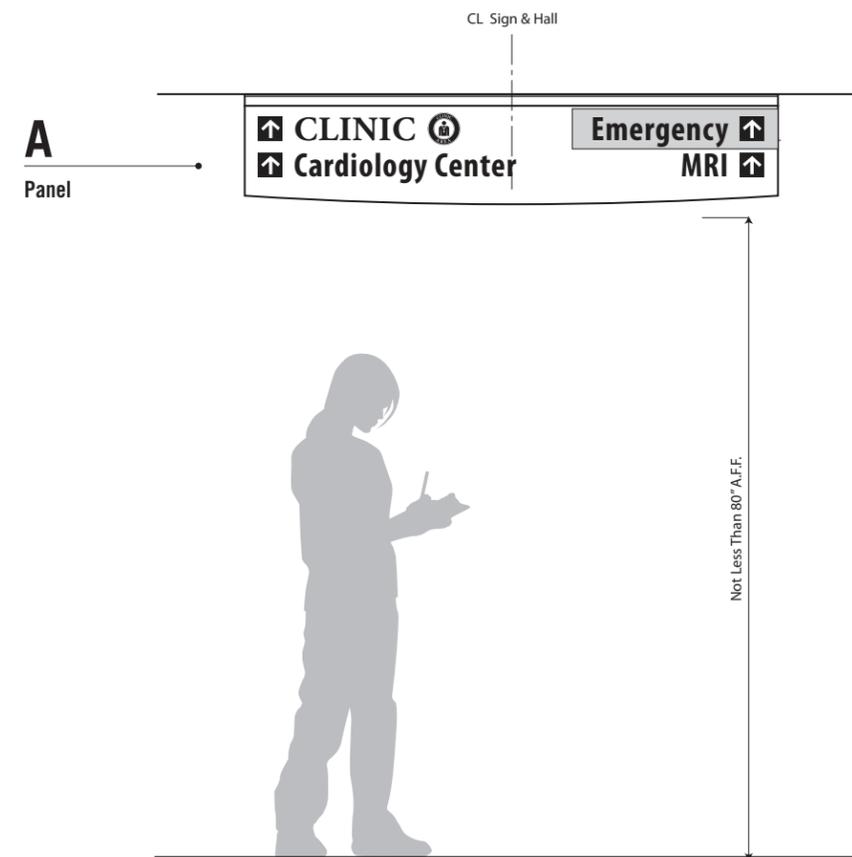

3 Elevation / 1/2" = 1'-0"

A Panel:
1/4" Thick Acrylic Plate, cut to shape, buff returns smooth and even to eliminate any tooling marks. Attach to Bracket Frame with countersunk screws thru face, fill and sand smooth. Paint finish all surfaces. Apply computer-cut 3M vinyl graphics to first surface.

Typography:
Myriad Pro Bold Condensed, 3" Cap Height. Use Above Garamond Pro for Area Name. Use 4" Cap Height for one line messages with no arrows.

Symbol:
Arrow: 3 1/4" Height; Area Icon: 4 1/4" Height.


B Bracket:
1 1/2" x 1 1/2" Aluminum Angle Bracket, 2 required. Cut to length, buff ends smooth and even to eliminate any tooling marks. Paint finish all surfaces.

Installation:
Mechanical attachment flush to ceiling thru ceiling to structure above (included any bracing needed). Touch up paint countersunk hardware as necessary after install is complete.

Structural Engineering:
REQUIRED. Provide sealed structural engineering drawings and calculations per requirements of Project Specifications.

Mark	Description	Date

Dimensions & shapes of all elements as shown on G3.W7a thru G3.W7b.

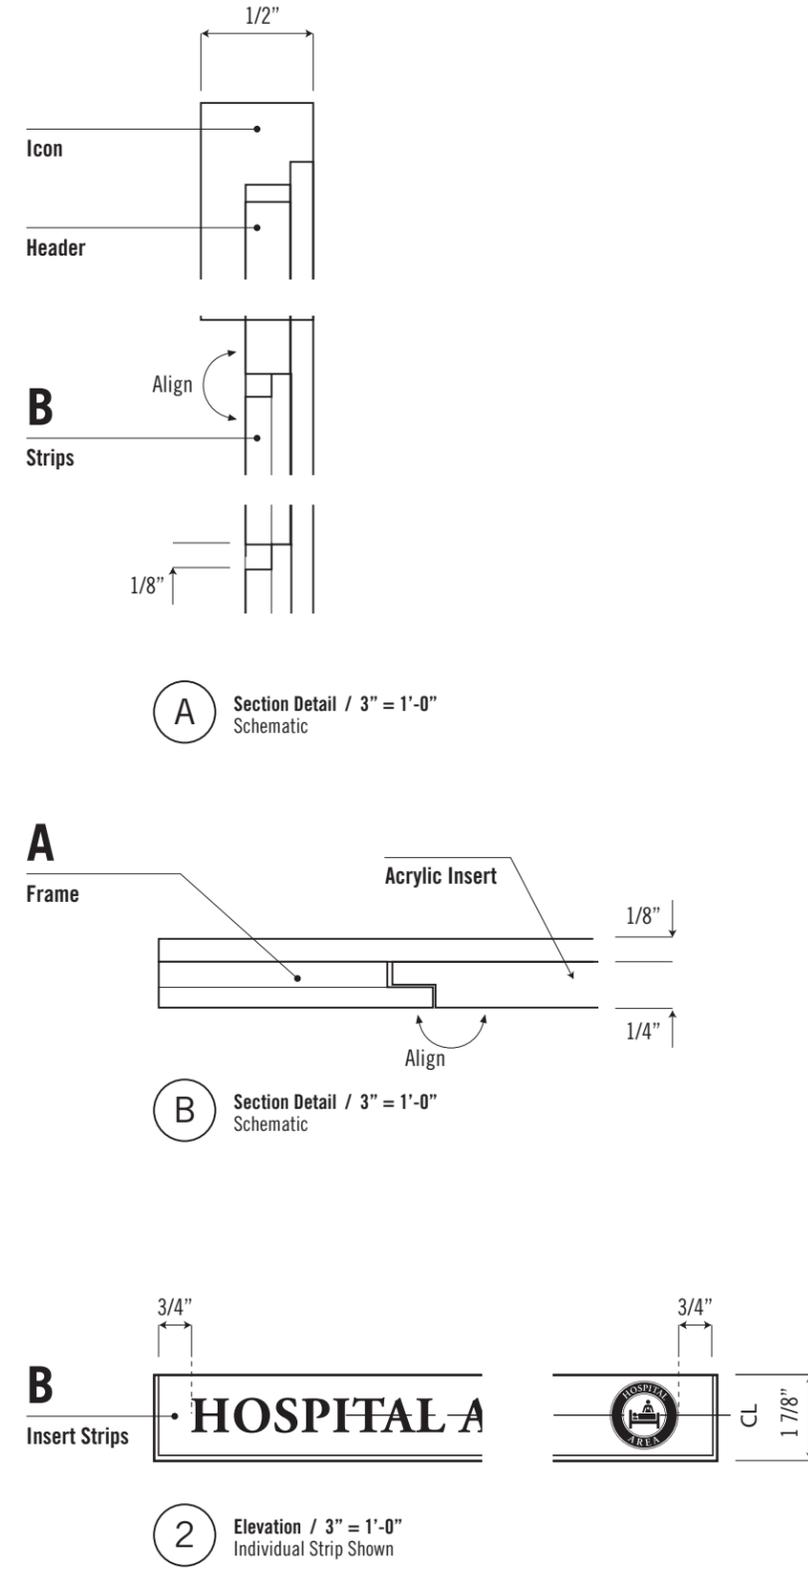

A Frame
 Frame of three layers of 1/8" thick computer cut Acrylic laminated together. Front layer has opening for strips. Middle layer is spacer. Back layer is full shape. Assemble w/ full bleed sheet adhesive. Configured to allow for strips and header to slide in from top. Buff returns of all layers smooth and even, paint finish.


Header & Icon
 1/2" Thick Acrylic Icon, cut to shape, Notch reverse to fit on Header, buff returns smooth. Paint Finished. Apply 3M digital print Vinyl graphics. Laminate to Header with full bleed adhesive. 1/4" Thick Acrylic Header, cut to shape, integral reveal @ bottom & sides, buff returns smooth. Configured to cap inserts. Paint Finished.

B Insert Strips
 1/4" Thick Acrylic Inserts, cut to shape, integral reveal @ bottom & sides, buff returns smooth. Paint Finished. Apply 3M computer-cut Vinyl graphics.

Typography:
 Myriad Pro Bold Condensed, 3/4" Cap Height. Use Adobe Garamond Pro for Area Name. Arrow Length is 1 1/8" in a 1 1/2 square field. Icon Height on strips is 1 1/2"


Symbols:
 Sized as indicated

Installation:
 Clean surface & apply Vinyl. Sign contractor to verify all as-built conditions prior to fabrication including dimensions and indicate on shop drawings. Ensure that all elements are uniform, parallel and aligned.

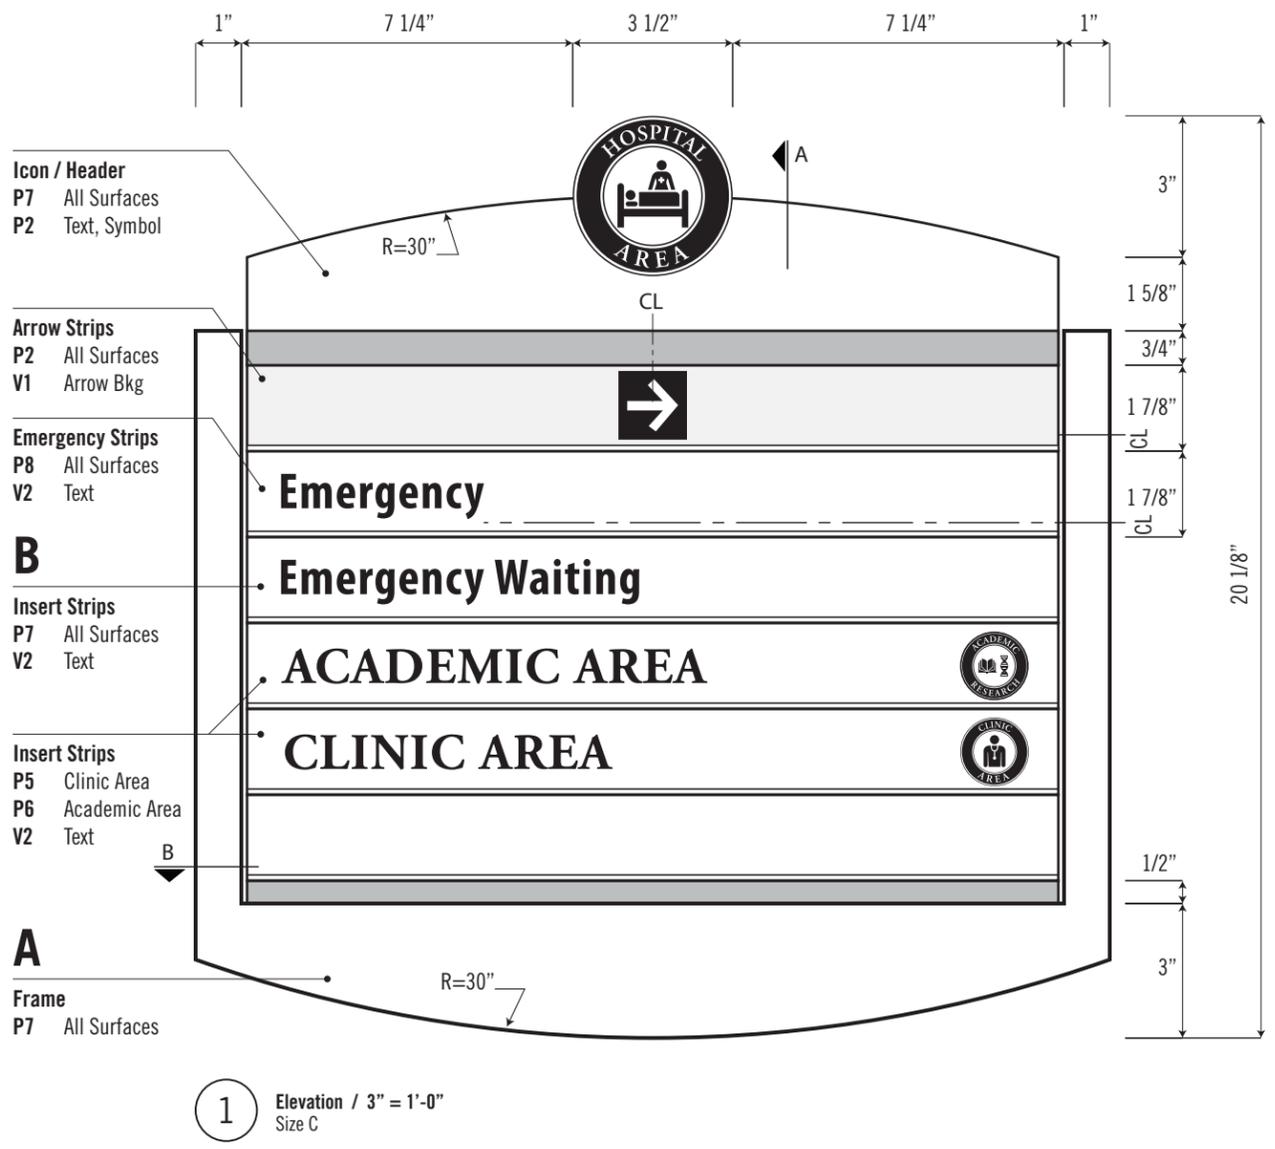


Mark	Description	Date

Dimensions & shapes of all elements as shown on G3.W7a thru G3.W7b.

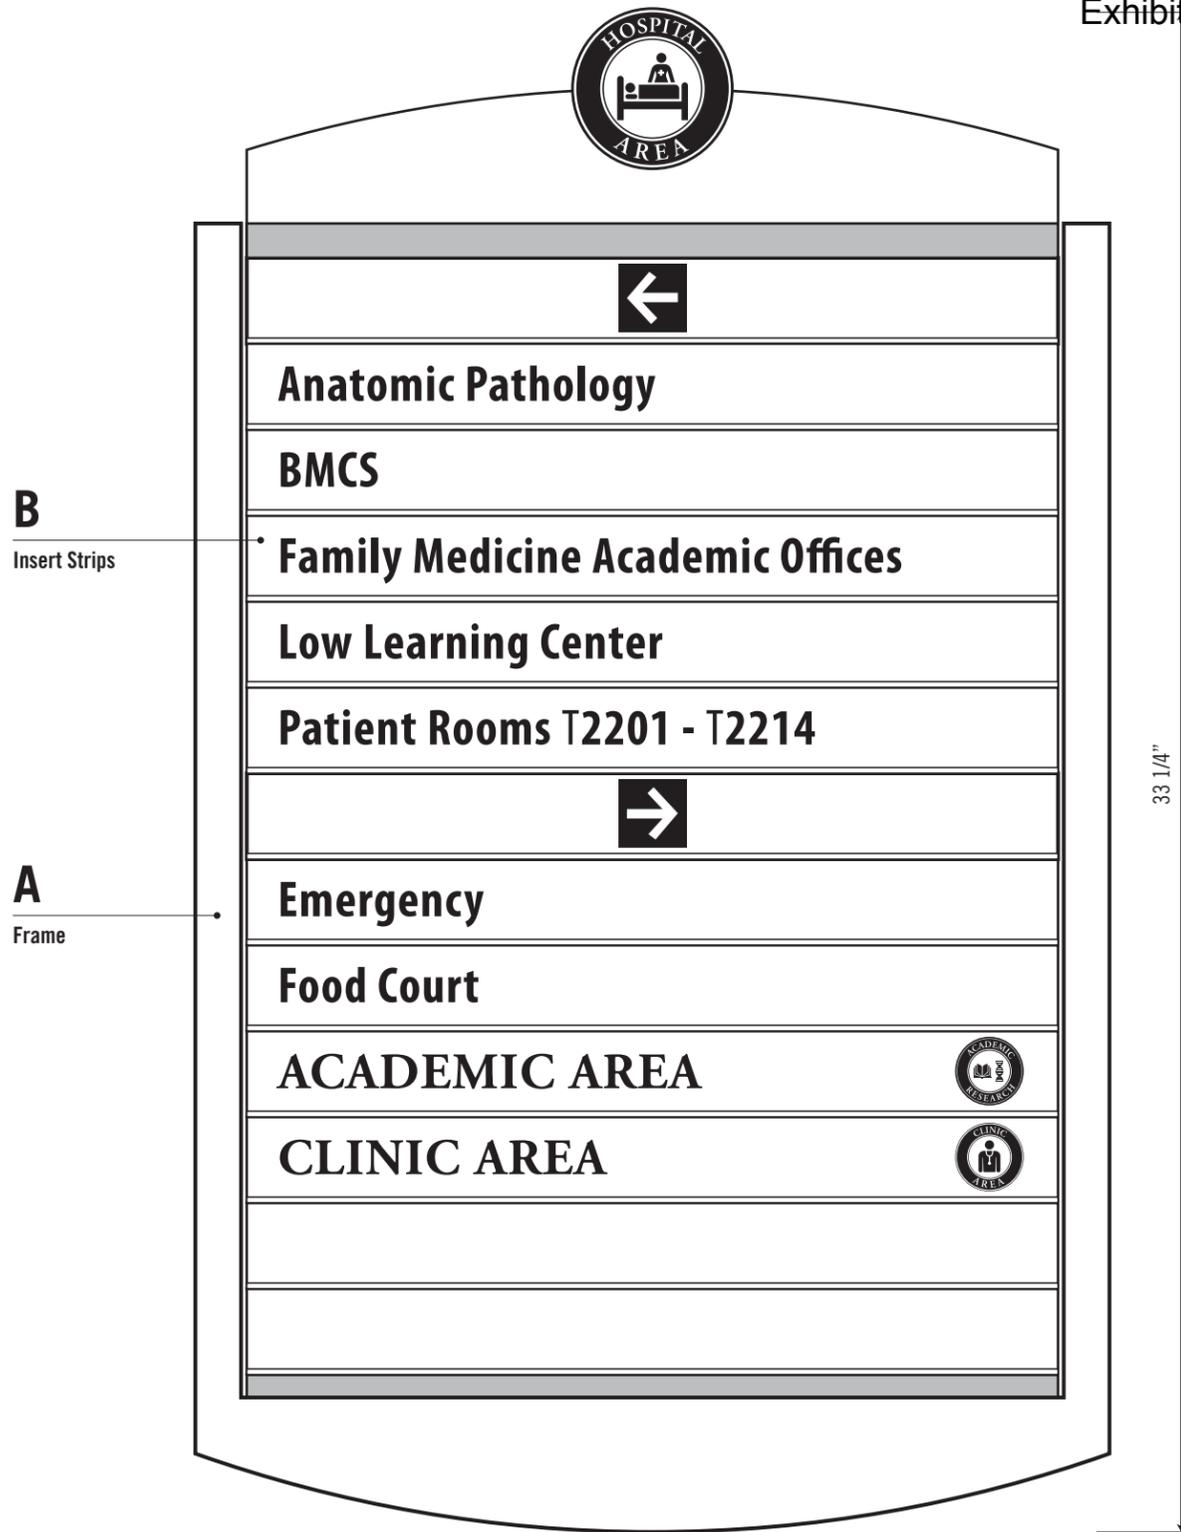




1 Elevation / 3" = 1'-0"
Size A

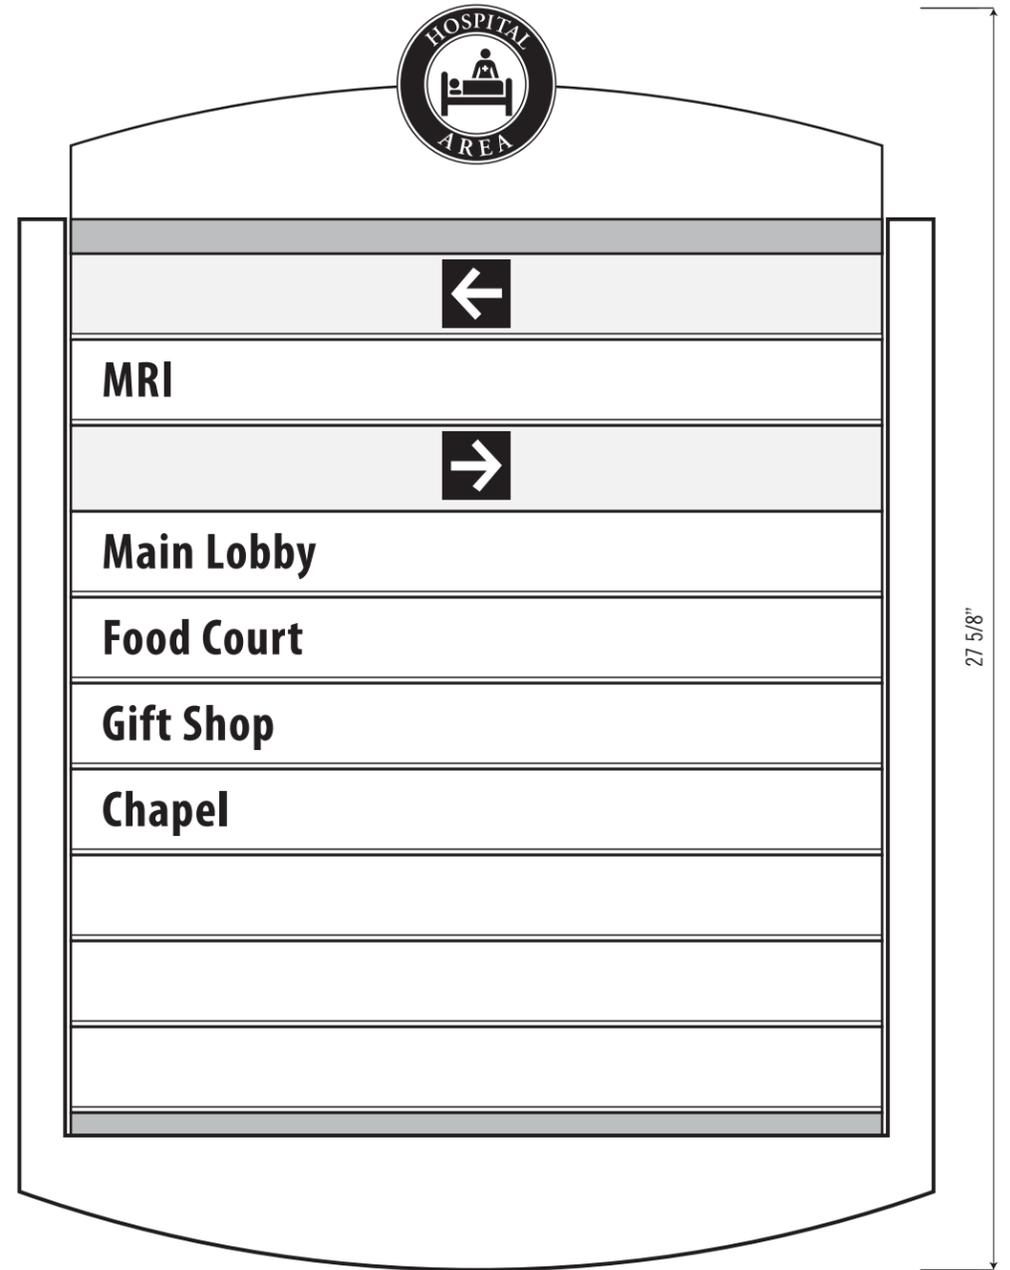

2 Elevation / 3" = 1'-0"
Size B

Mark	Description	Date

Dimensions & shapes of all elements as shown on G3.W8a.

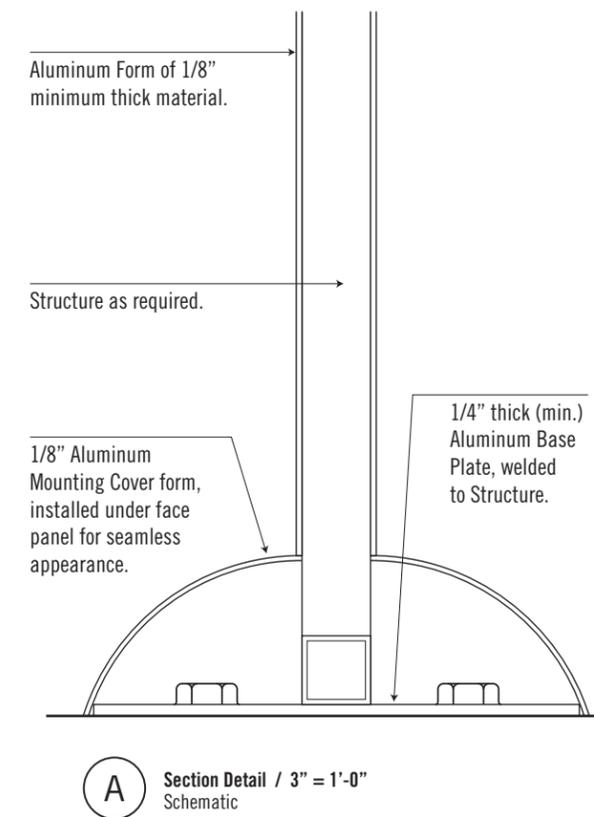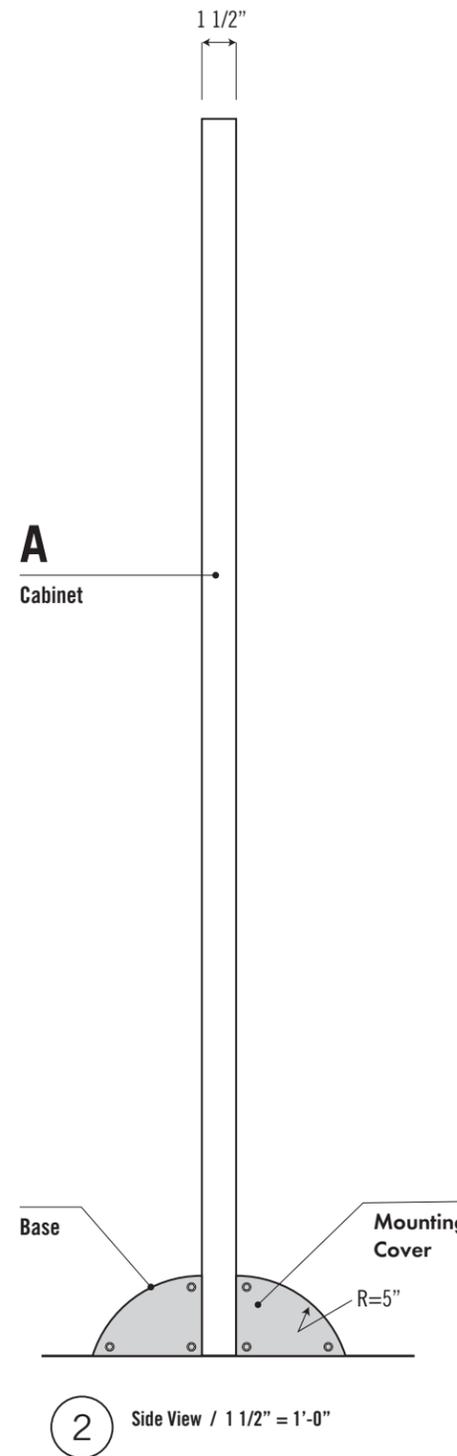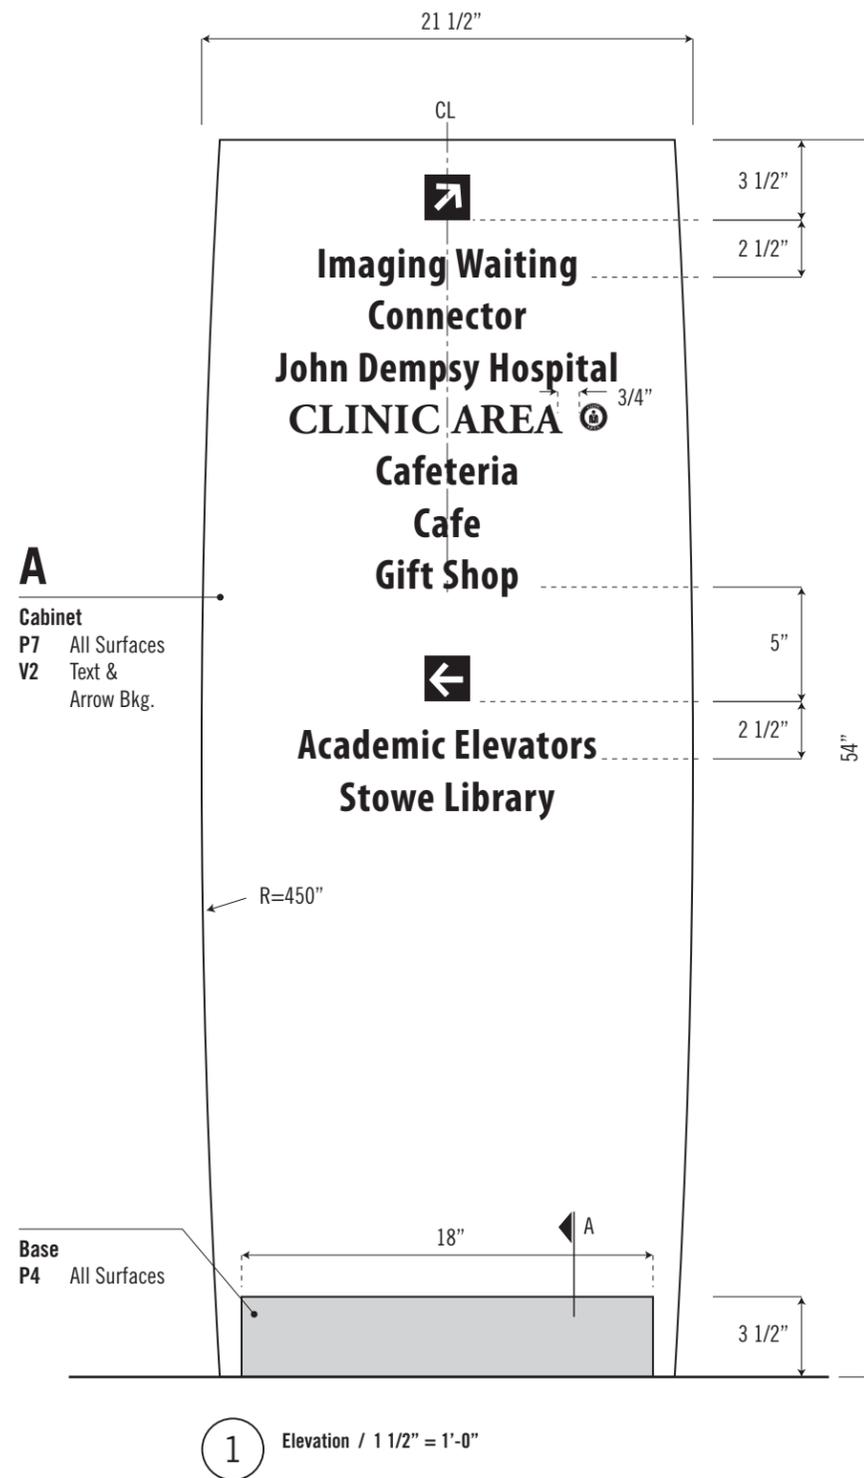

A Cabinet:
Fabricated form of 1/8" Aluminum (minimum) with internal structure as required. Continuous weld all seams, grind and buff smooth. Paint finished. Concealed mounting bracket, secured to floor. Incorporated Mounting plate and cover. Survey existing conditions. Apply 3M computer cut vinyl graphics to first surface.

Typography:
Myriad Pro Bold Condensed, 1 1/4" Cap Height (Base on "E"), Interline spacing of 1".

Symbols:
2" Arrow Height, 1 1/4" Area Icon Height.

Installation:
Concealed mechanical attachment to floor. Ensure assembly is secured, plumb and level.

Structural Engineering:
REQUIRED. Provide sealed structural engineering drawings and calculations per requirements of Project Specifications.


Mark	Description	Date

Dimensions & shapes of all elements as shown on G3.D2a


A Plaque:
 1/4" Thick Acrylic sheet, cut to shape, buff returns smooth and even to eliminate any tooling marks. Paint finished all surfaces. Apply computer-cut 3M vinyl graphics to first surface.

Typography:
 "Tower Elevators": Myriad Pro Bold Condensed, 2 1/2" Cap Height.
 "Level" and Level Number: Myriad Pro Regular Condensed, 2 1/4" Cap Height.

Installation:
 Concealed 3M VHB tape and silicone mount flush to wall surface. Position as indicated.

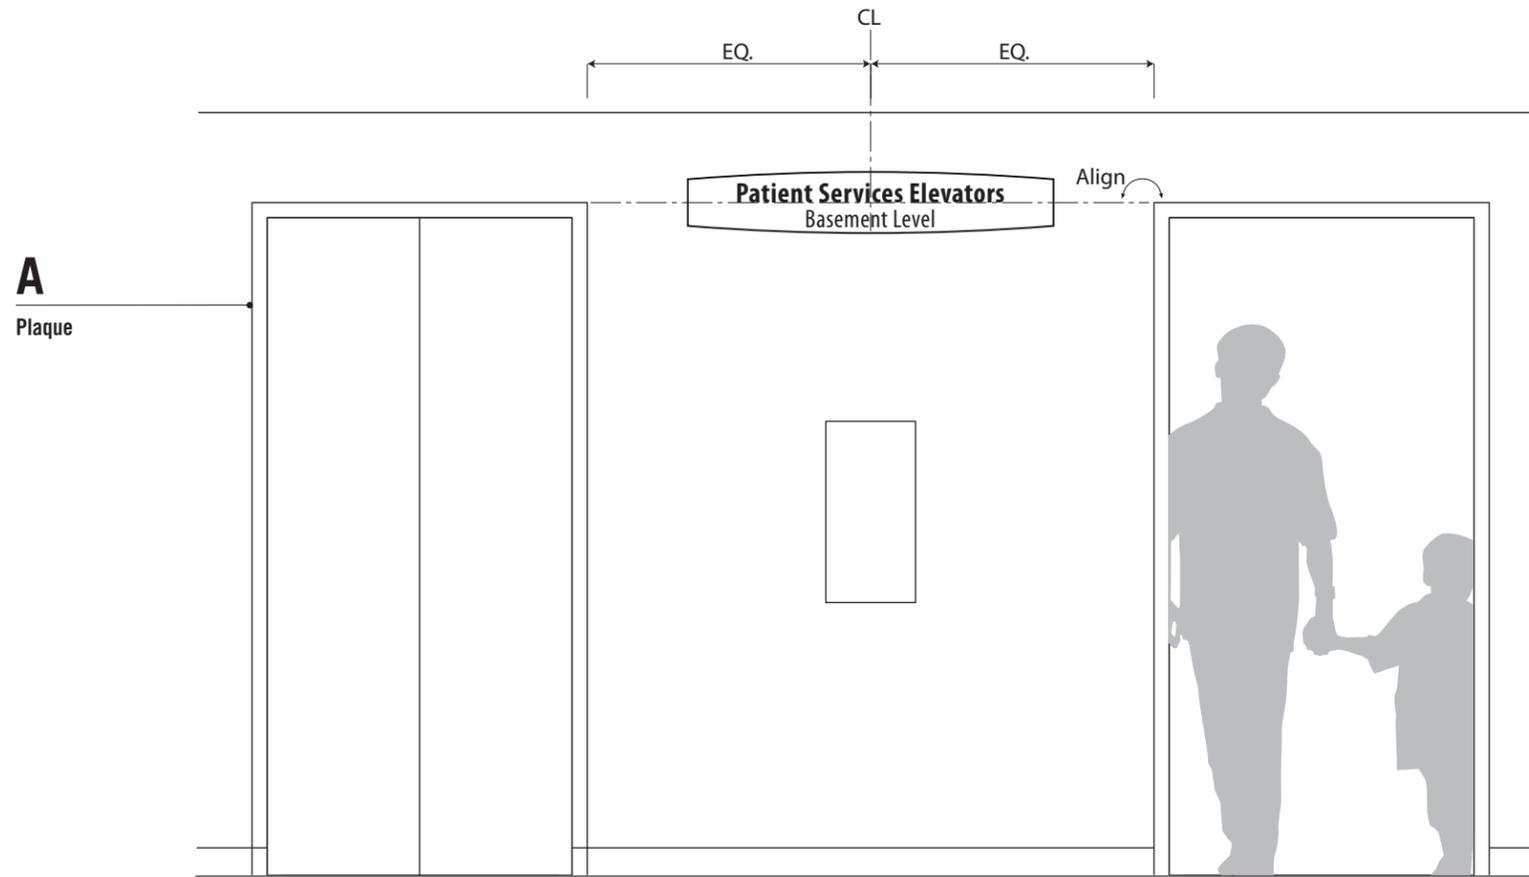

3 Elevation / 1/2" = 1'-0"

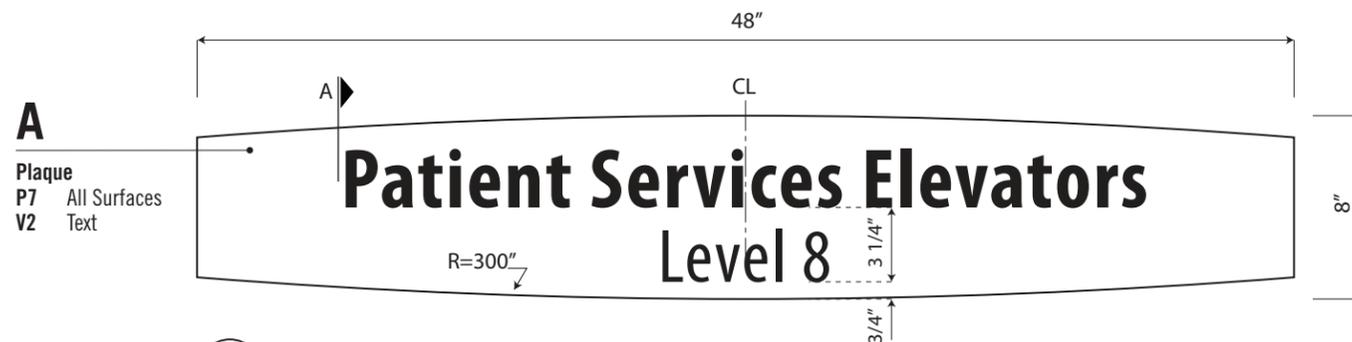





1 Elevation / 1 1/2" = 1'-0"



2 Side View / 1 1/2" = 1'-0"

Mark	Description	Date

Dimensions & shapes of all elements as shown on G3.D3a thru G3.D3b

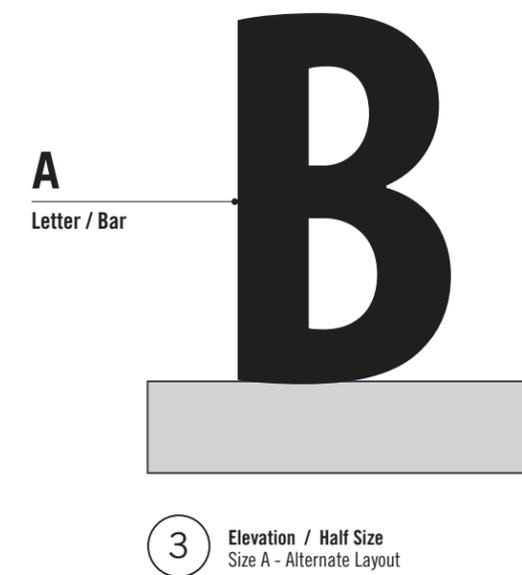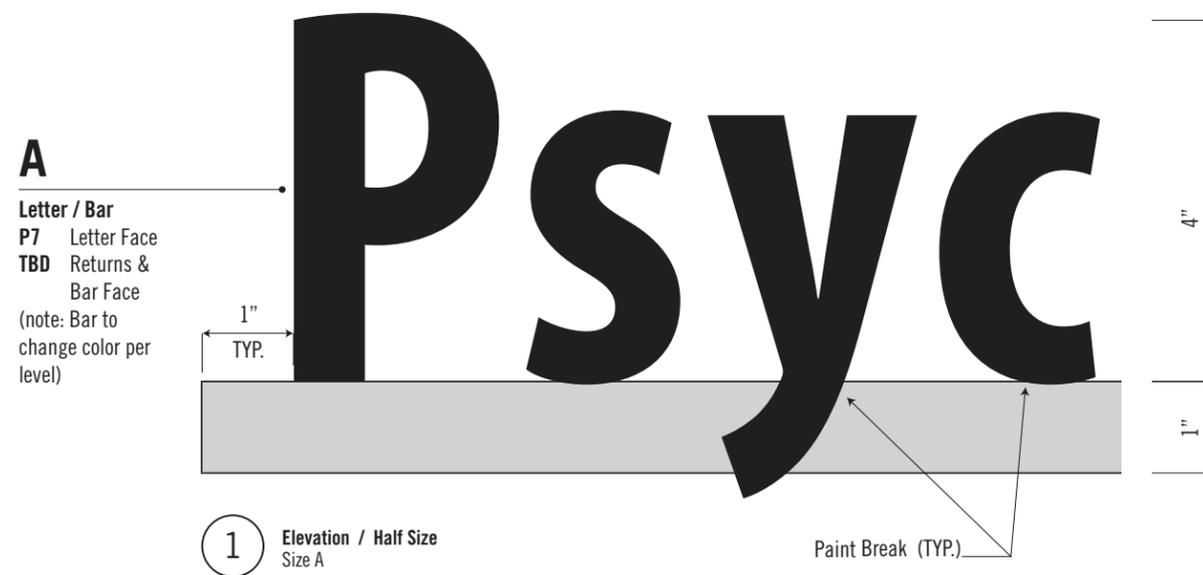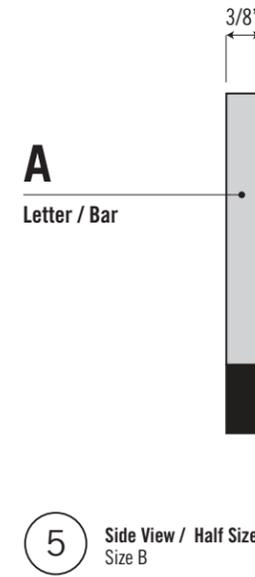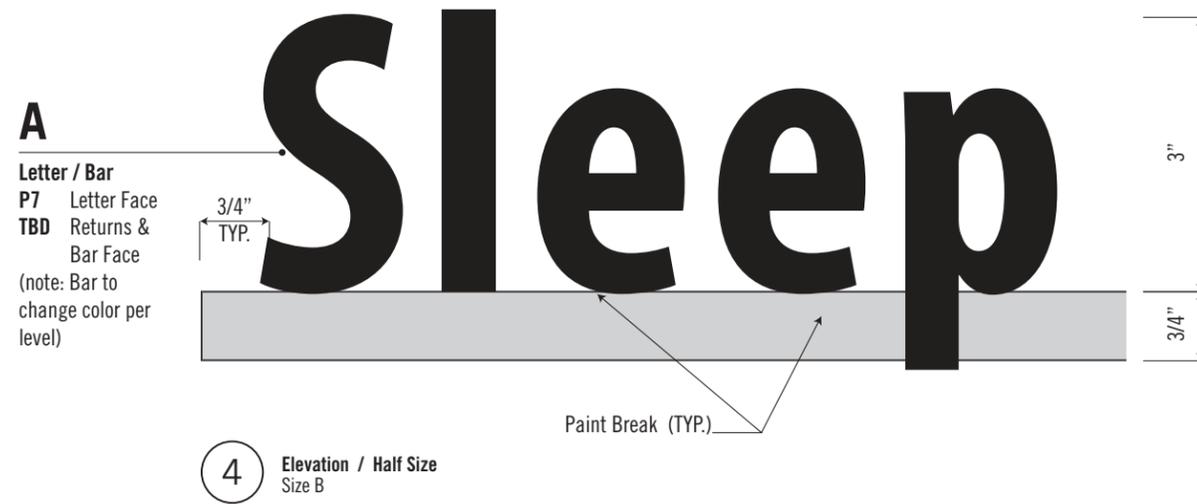

A
Letter / Bar:
1/2" Thick Acrylic computer cut letters & integral bar. Buff inside and outside returns smooth and even to eliminate any tooling marks. Drill and Tap as needed to provide secure attachment. Paint finish all surfaces as indicated.

Typography: Myriad Pro Bold Condensed, size as indicated.

Installation:
Concealed Pin and Silicone mount flush to wall. Locations illustrated are typical suggestion placements. Designer to verify exact mounting position.

Mark	Description	Date

Dimensions & shapes of all elements as shown on G3.D3a thru G3.D3b

Hospital Elevators

LEVEL 2


A

Letter / Bar
 P7 Letter Face
 TBD Returns & Bar Face
 (note: Bar to change color per level)

3 Elevation / 3" = 1'-0"
 Size C

A


Letter / Bar

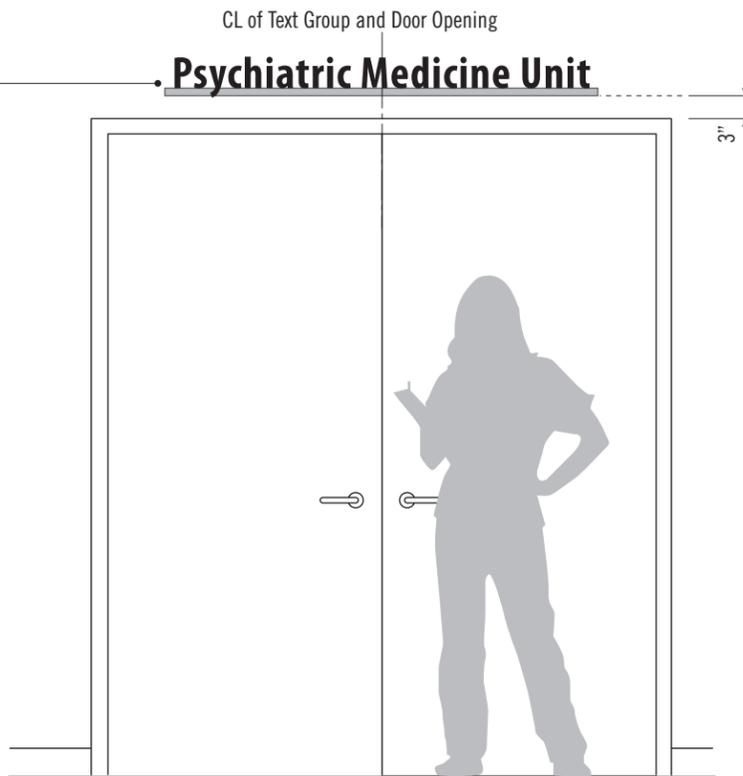

1 Elevation / 1/2" = 1'-0"
 Department Entry

A



Letter / Bar

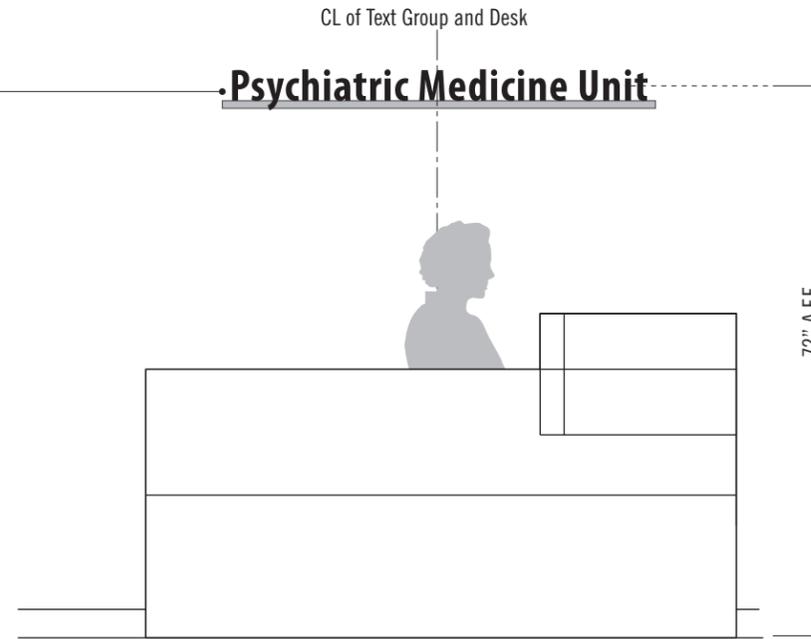


2 Elevation / 1/2" = 1'-0"
 Department Desk

Mark	Description	Date

Dimensions & shapes of all elements as shown on G3.D4a thru G3.D4c.

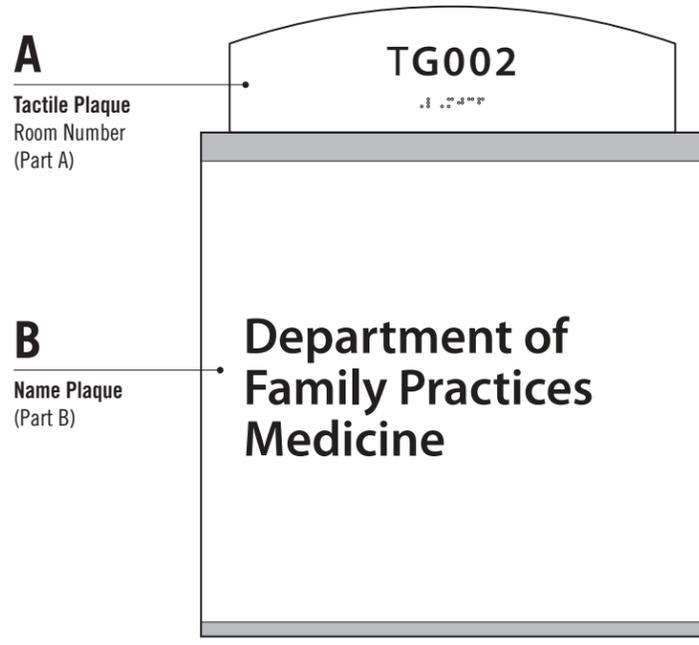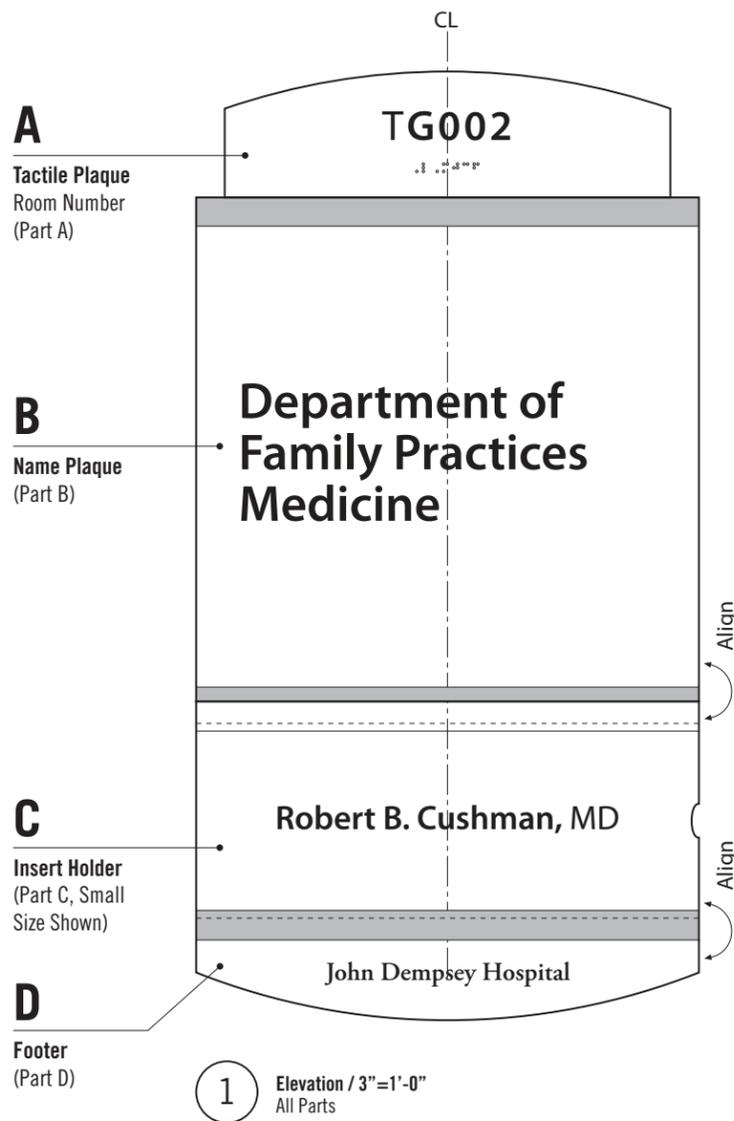

3 Elevation / 3"=1'-0"
Example Parts A/B

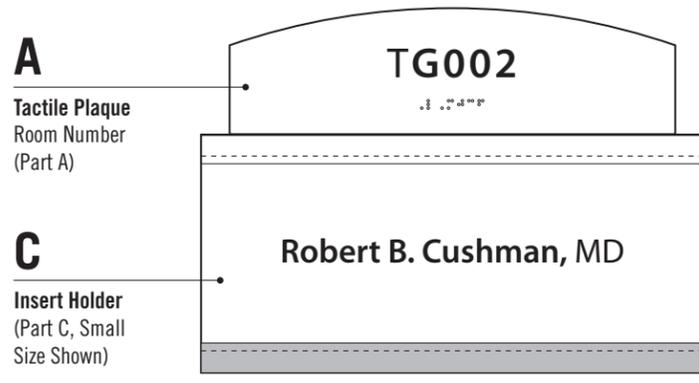

2 Elevation / 3"=1'-0"
Example Parts A/C

A Tactile Plaque
1/8" thick Photopolymer w/ raised graphics and Grade 2 Braille. Laminate to 1/8" thick Acrylic Plate, cut to shape, with full bleed adhesive, aligning edges even. Buff returns smooth and even to eliminate any tooling marks and paint finish all surfaces as indicated.

Typography:
Myriad Pro Semibold, 5/8" Cap Height (Based on "E"), Kerned +75%
Use Myriad Pro Regular for area Character.

Grade 2 Braille:
Height, kerning & leading per requirements of the DOJ's 2010 ADA Standards for Accessible Design.

B Name Plaque
3/16" thick Acrylic Plate, cut to size. Laminate to 1/8" thick Acrylic Plate, cut to size, with full bleed adhesive, aligning edges even. Buff returns smooth and even to eliminate any tooling marks and paint finish all surfaces as indicated. Apply 3M computer-cut Vinyl graphics to first surface.

Typography:
Myriad Pro Semibold, 3/4" Cap Height (Based on "E"), Interline spacing of 3/8".

C Insert Holder
1/8" Thick Acrylic Plate, cut to shape, clear polish returns. Back paint 2nd surface top & bottom to create window. Back with spacer & backer. 3/4" tall x 3/16" wide finger notch thru all layers. 1/8" Thick Acrylic BackPlate, cut to shape, buff returns smooth. Laminate to Spacer. All surfaces paint finished. 1/16" Thick Acrylic Spacer, cut to shape, buff returns smooth. Configured to hold insert, as indicated by size. Laminate to Window & BackPlate. All surfaces except window to be paint finished.


Insert:
(11" x 4 1/4") White Laser Compatible 60# Cover Weight Paper
Text to be printed Black with a Laser Printer.

D Footer
Refer to G3.D4b.

Installation:
Refer to G3.D4b.


Mark	Description	Date

Exhibit C Drawings and Specifications

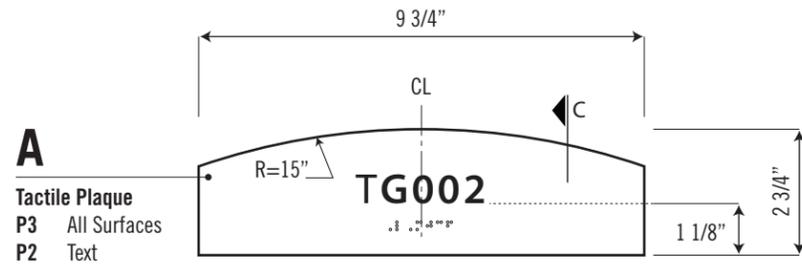


A
Tactile Plaque
P3 All Surfaces
P2 Text

3 Elevation / 3"=1'-0"
Part A



A
Tactile Plaque
Backplate


C Section Detail / 3"=1'-0"
Schematic

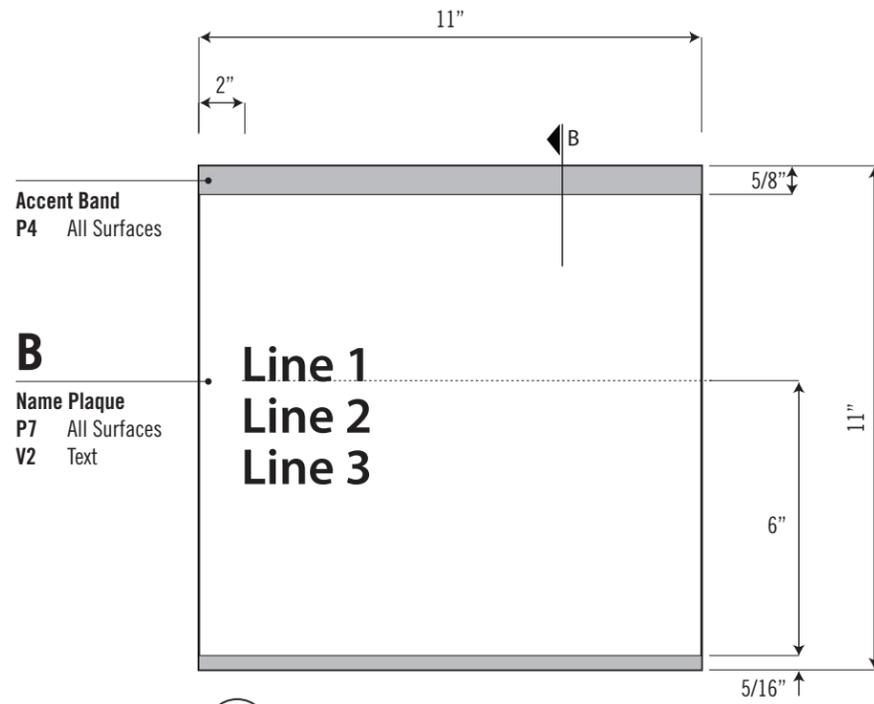

Accent Band
P4 All Surfaces


B
Name Plaque
P7 All Surfaces
V2 Text

2 Elevation / 3"=1'-0"
Part B

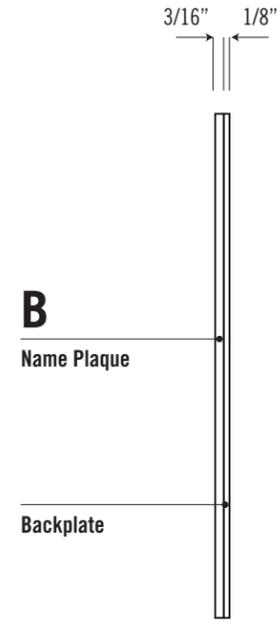


B
Name Plaque
Backplate

B Section Detail / 3"=1'-0"
Schematic

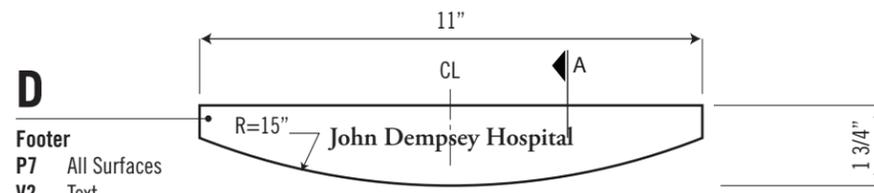

D
Footer
P7 All Surfaces
V2 Text

1 Elevation / 3"=1'-0"
Part D



D
Footer
Backplate

A Section Detail / 3"=1'-0"
Schematic

Dimensions & shapes of all elements as shown on G3.D4a thru G3.D4c.





D Footer
3/16" Thick Acrylic Plate, cut to shape. Laminate to Back Plate, buff returns smooth. Paint Finished. Apply 3M computer-cut Vinyl graphics.

Typography:
Adobe Garamond Pro Semibold, 3/8" Cap Height (Based on E).

Installation:
Concealed VHB tape and silicone mount flush to wall adjacent to latch side of door. Locate 60" to top of plaque from finished floor, 2" from door frame to edge of plaque. Position all parts flush to each other for the appearance of a single unit. Note for outswinging door locations, locate sign so that a clear floor space of 18" x 18" minimum, centered on the tactile characters is provided beyond the arc of any door swing.




Mark	Description	Date

Dimensions & shapes of all elements as shown on G3.D4a thru G3.D4c.

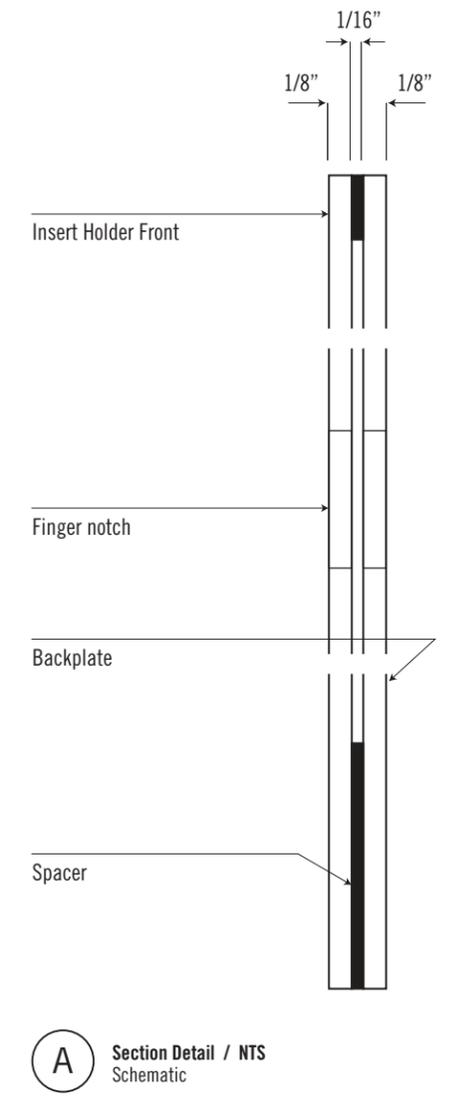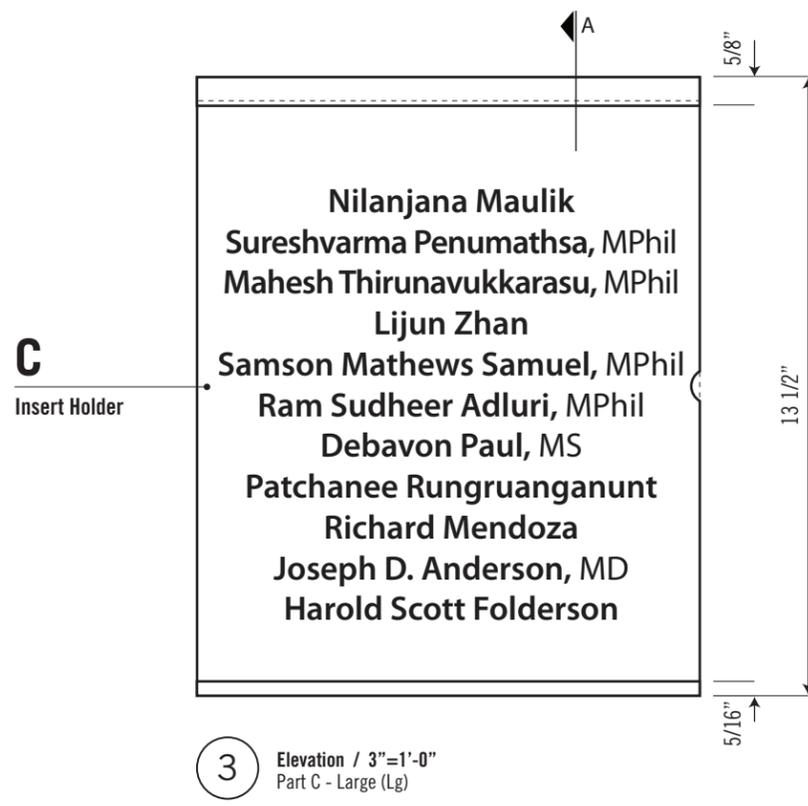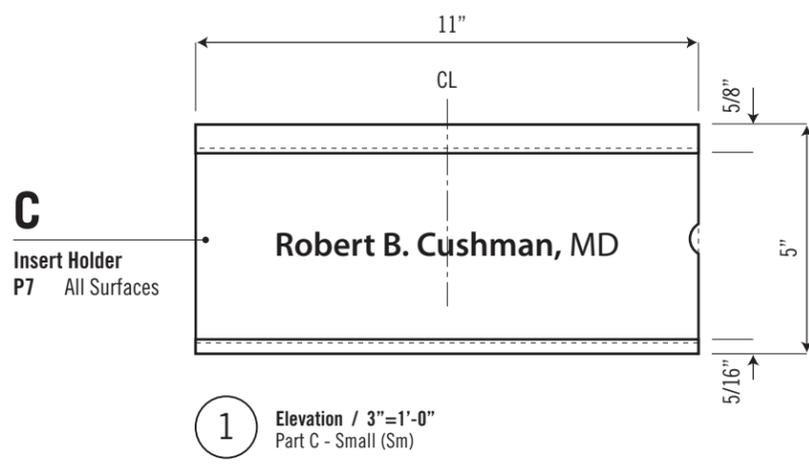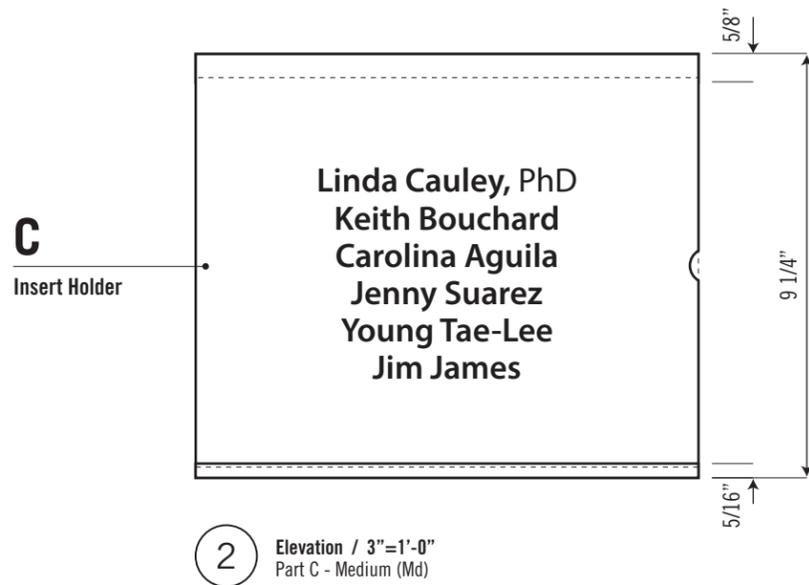

Mark	Description	Date

Dimensions & shapes of all elements as shown on G3.D5a thru G3.D5c.

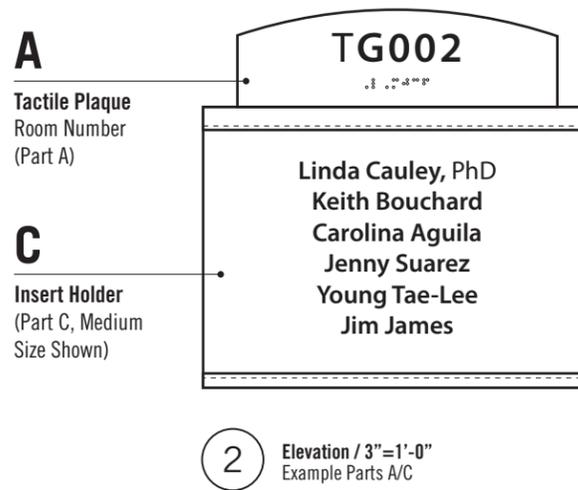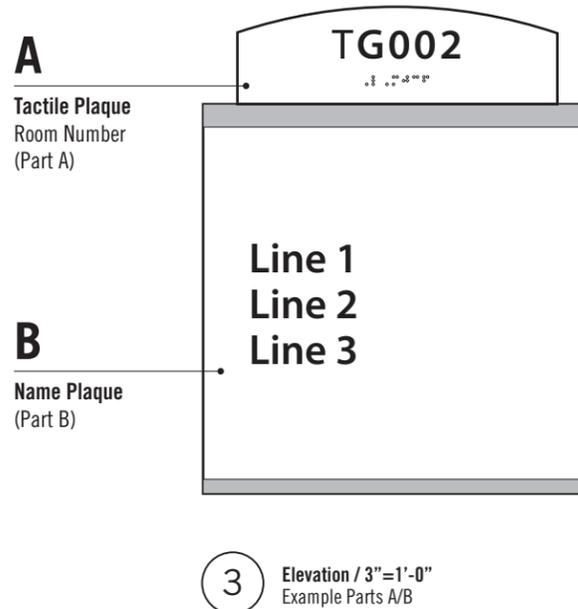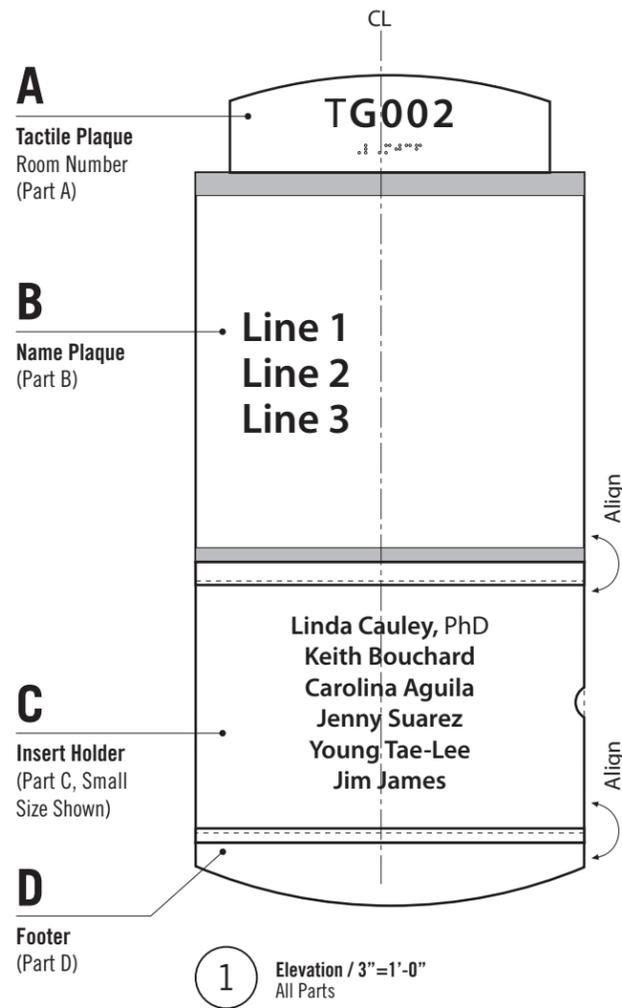

A Tactile Plaque

1/8" thick Photopolymer w/ raised graphics and Grade 2 Braille. Laminate to 1/8" thick Acrylic Plate, cut to shape, with full bleed adhesive, aligning edges even. Buff returns smooth and even to eliminate any tooling marks and paint finish all surfaces as indicated.

Typography:
Myriad Pro Semibold, 5/8" Cap Height (Based on "E"), Kerned +75%
Use Myriad Pro Regular for area Character.

Grade 2 Braille:

Height, kerning & leading per requirements of the DOJ's 2010 ADA Standards for Accessible Design.

B Name Plaque

3/16" thick Acrylic Plate, cut to size. Laminate to 1/8" thick Acrylic Plate, cut to size, with full bleed adhesive, aligning edges even. Buff returns smooth and even to eliminate any tooling marks and paint finish all surfaces as indicated. Apply 3M computer-cut Vinyl graphics to first surface.

Typography:

Myriad Pro Semibold, 5/8" Cap Height (Based on "E"), Interline spacing of 5/16". For room number (Alt Layout), use 2 1/2" Cap Height.

C Insert Holder

1/8" Thick Acrylic Plate, cut to shape, clear polish returns. Back paint 2nd surface top & bottom to create window. Back with spacer & backer. 3/4" tall x 3/16" wide finger notch thru all layers. 1/8" Thick Acrylic BackPlate, cut to shape, buff returns smooth. Laminate to Spacer. All surfaces paint finished. 1/16" Thick Acrylic Spacer, cut to shape, buff returns smooth. Configured to hold insert, as indicated by size. Laminate to Window & BackPlate. All surfaces except window to be paint finished.

Insert:

(11" x 4 1/4") White Laser Compatible 60# Cover Weight Paper
Text to be printed Black with a Laser Printer.








D Footer

Refer to G3.D5b.

Installation:
Refer to G3.D5b.

Mark	Description	Date

Dimensions & shapes of all elements as shown on G3.D5a thru G3.D5c.

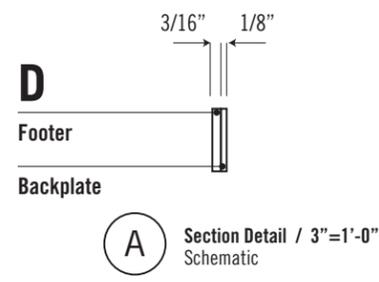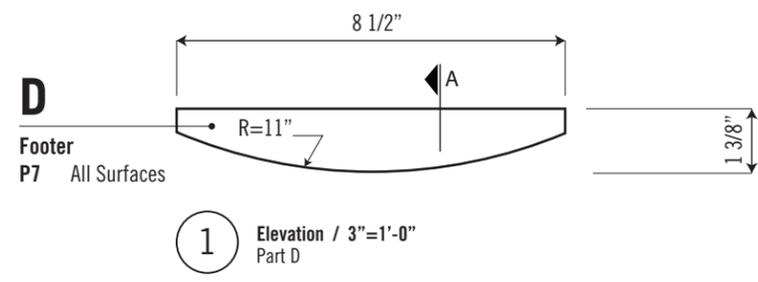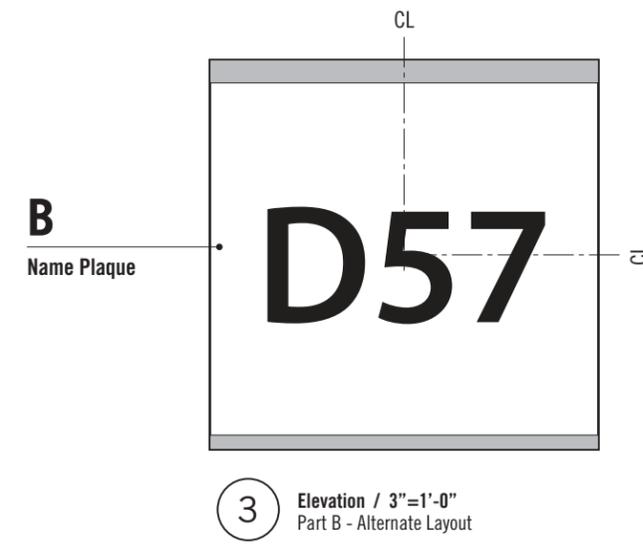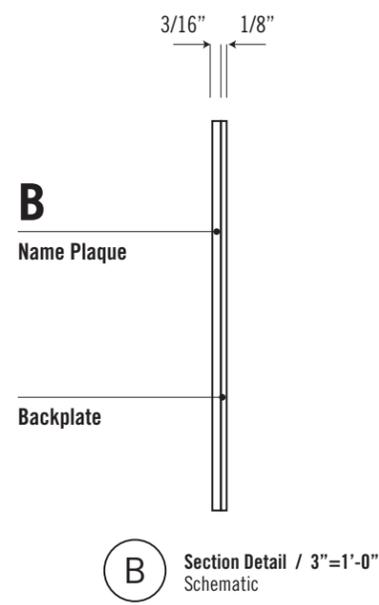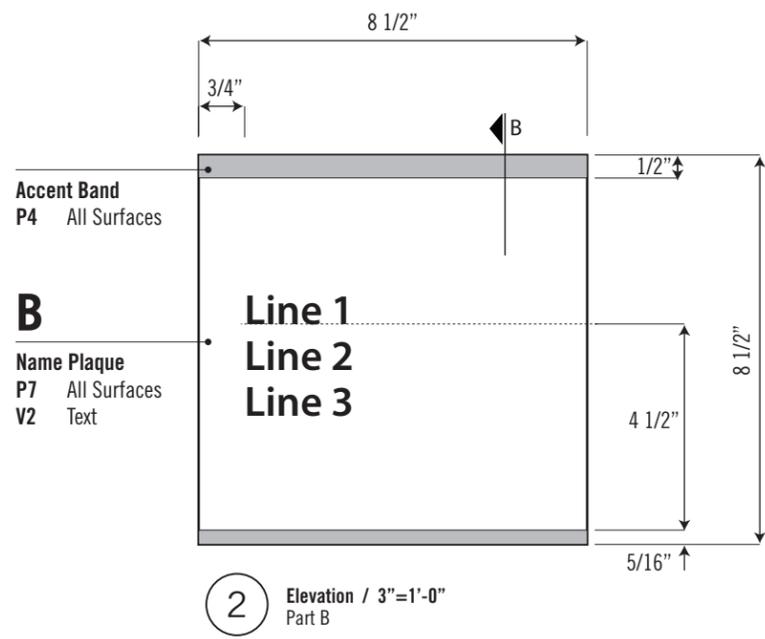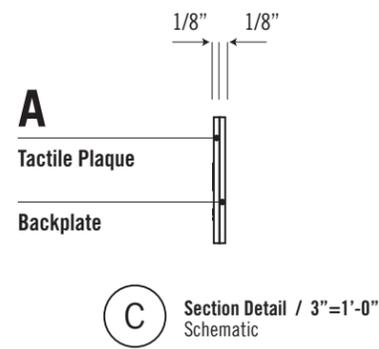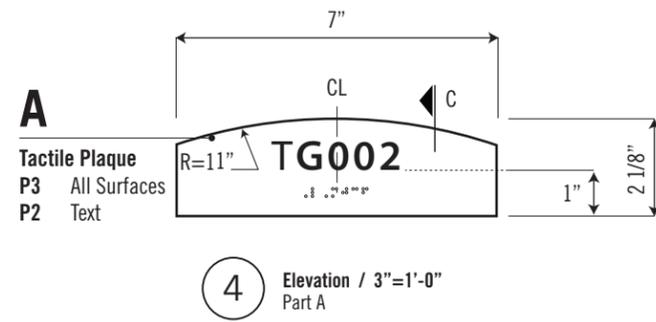


D Footer
3/16" Thick Acrylic Plate, cut to shape. Laminate to Back Plate, buff returns smooth. Paint Finished.


Installation:
Concealed VHB tape and silicone mount flush to wall adjacent to latch side of door. Locate 60" to top of plaque from finished floor, 2" from door frame to edge of plaque. Position all parts flush to each other for the appearance of a single unit. Note for outswinging door locations, locate sign so that a clear floor space of 18" x 18" minimum, centered on the tactile characters is provided beyond the arc of any door swing.

Mark	Description	Date


Dimensions & shapes of all elements as shown on G3.D5a thru G3.D5c.

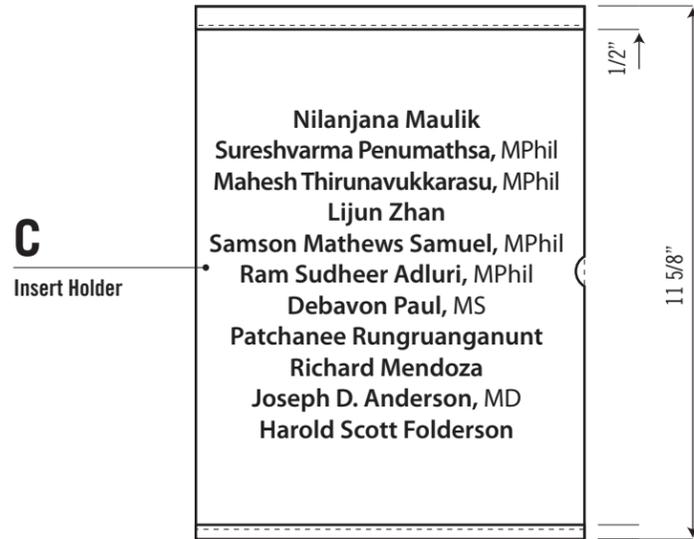


3 Elevation / 3"=1'-0"
Part C - Large (Lg)

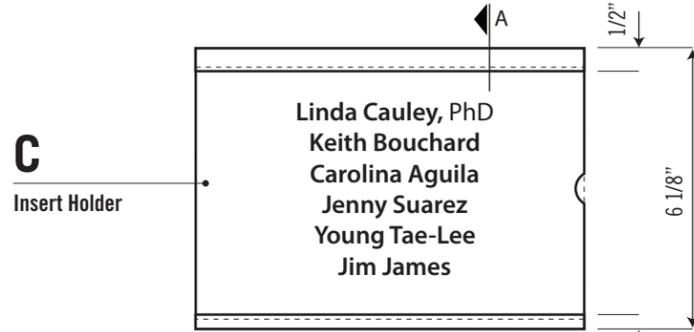

2 Elevation / 3"=1'-0"
Part C - Medium (Md)

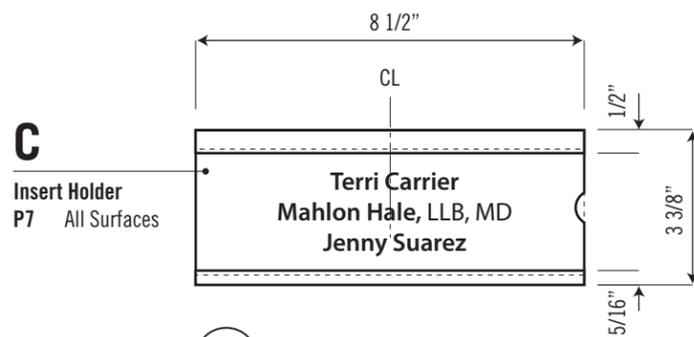


1 Elevation / 3"=1'-0"
Part C - Small (Sm)

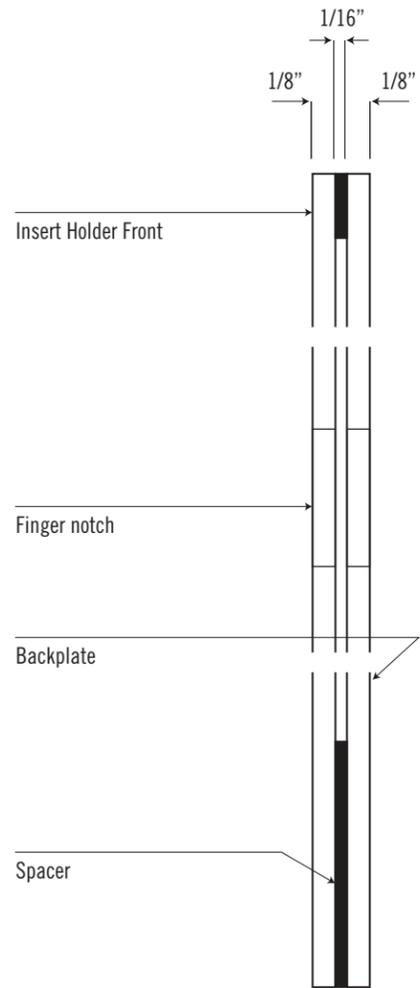


A Section Detail / NTS
Schematic

Mark	Description	Date

Dimensions & shapes of all elements as shown on G3.D6a thru G3.D6b.

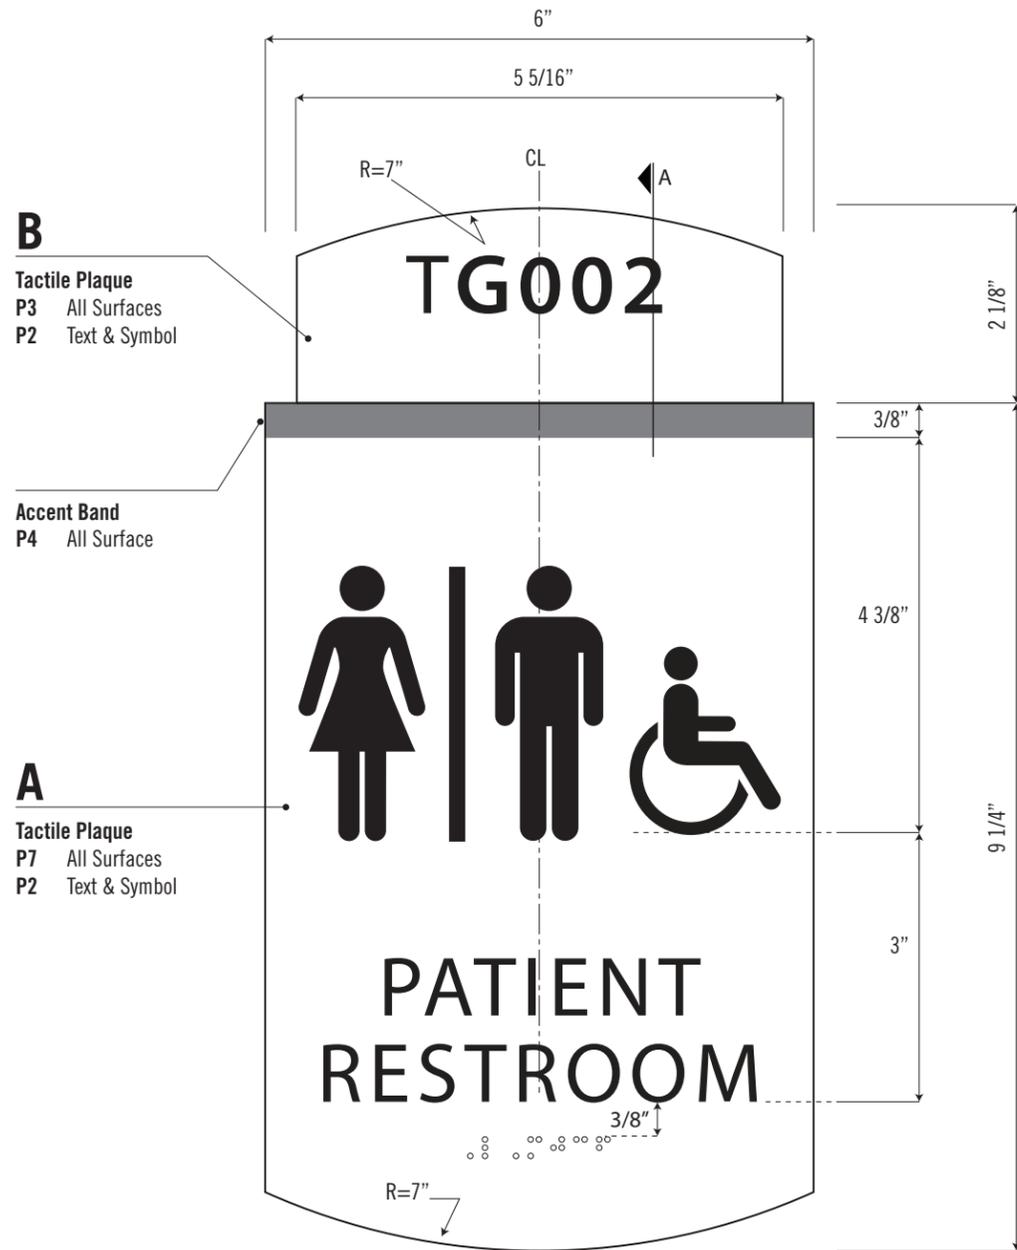

1 Elevation / Half Size

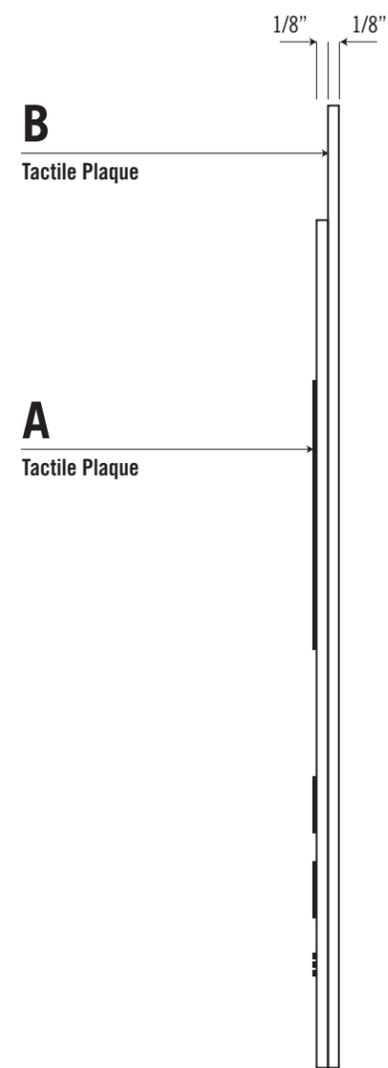

2 Section / Half Size

A Tactile Plaque:
1/8" thick Photopolymer w/ raised graphics and Grade 2 Braille. Buff returns smooth and even to eliminate tooling marks. Paint all surfaces as indicated. Tip text as indicated.

Typography:
Myriad Pro Regular, 5/8" Cap Height (Based on "E"), Kerned +75%, Interline Spacing of 3/8". Use Myriad Pro Semibold for Area Letter.

Symbol:
3" Height.

Grade 2 Braille:
Height, kerning & leading per requirements of the DOJ's 2010 ADA Standards for Accessible Design.

B Tactile Plaque:
1/8" thick Photopolymer w/ raised graphics and Grade 2 Braille. Buff returns smooth and even to eliminate tooling marks. Paint all surfaces as indicated. Tip text as indicated.


Typography:
Myriad Pro Regular, 5/8" Cap Height (Based on "E"), Kerned +75%. Use Myriad Pro Semibold for Area Letter.

Grade 2 Braille:
Height, kerning & leading per requirements of the DOJ's 2010 ADA Standards for Accessible Design.

Installation:
Concealed 3M VHB tape & silicone mount flush to wall adjacent to latch side of door. Locate 60" from top of plaque to finished floor. Position 2" from edge of Plaque to door frame. Note for outswinging door locations, locate sign so that a clear floor space of 18" x 18" minimum, centered on the tactile characters is provided beyond the arc of any door swing.


Mark	Description	Date

Dimensions & shapes of all elements as shown on G3.D6a thru G3.D6b.

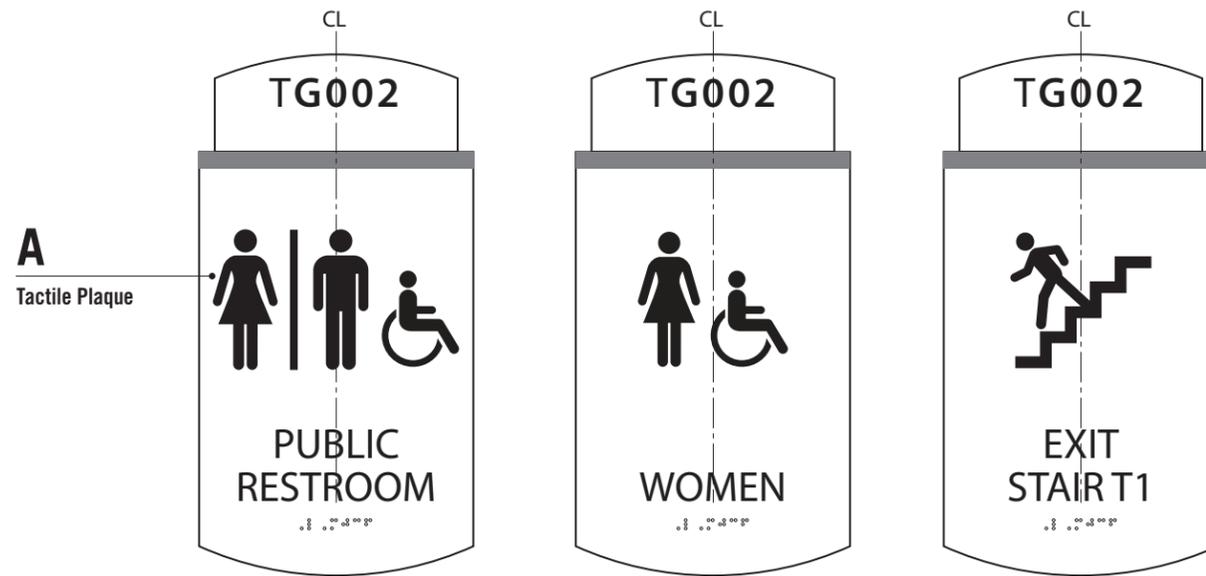

A
Tactile Plaque

2 Elevation / 3" = 1'-0"
Alternate Layouts

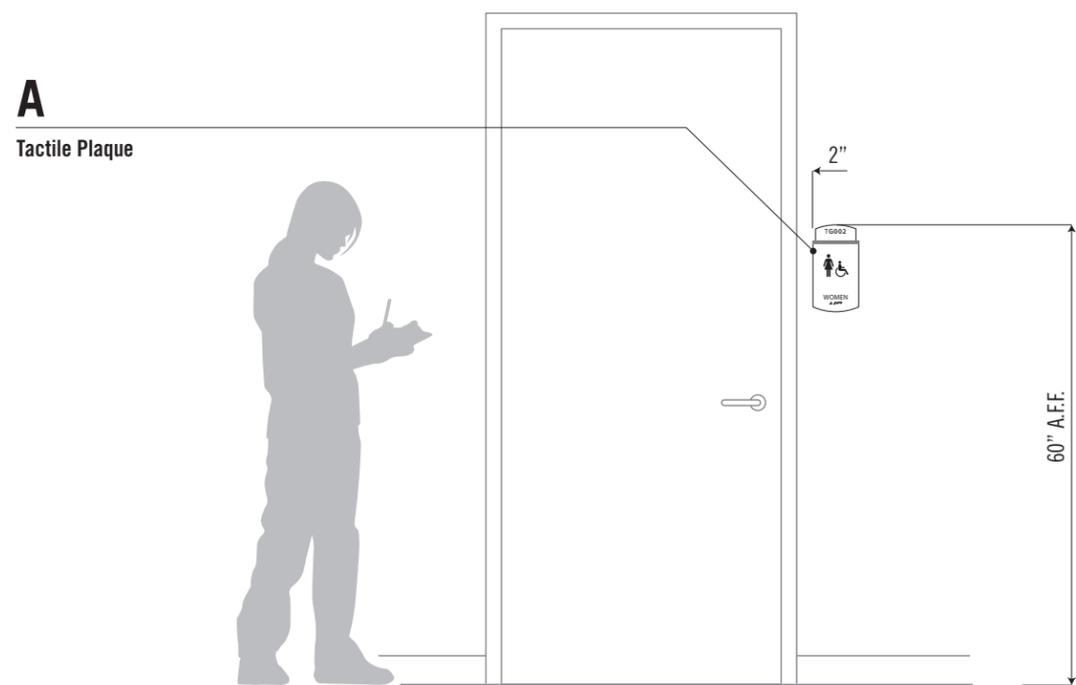


A
Tactile Plaque


1 Front Elevation / 1/2" = 1'-0"

Mark	Description	Date


Dimensions & shapes of all elements as shown on G3.D7a thru G3.D7c.

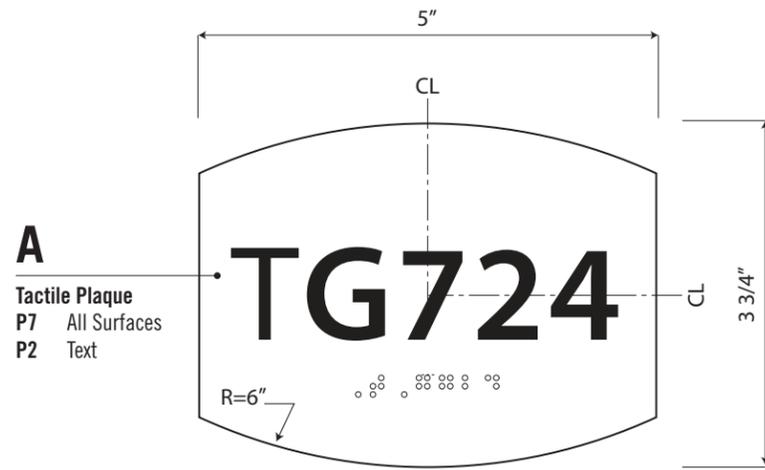


4 Elevation / Half Size Part A

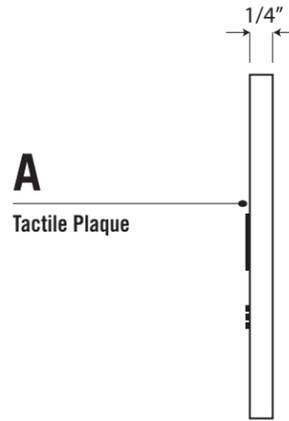

5 Side View / Half Size Part A

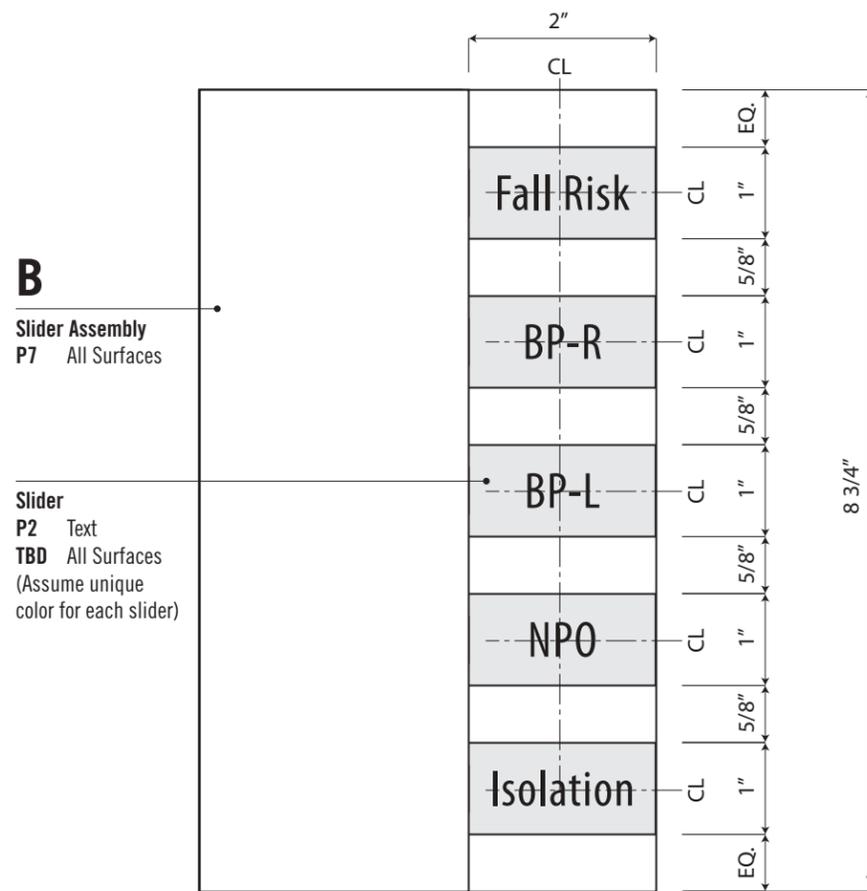

1 Elevation / Half Size Part B

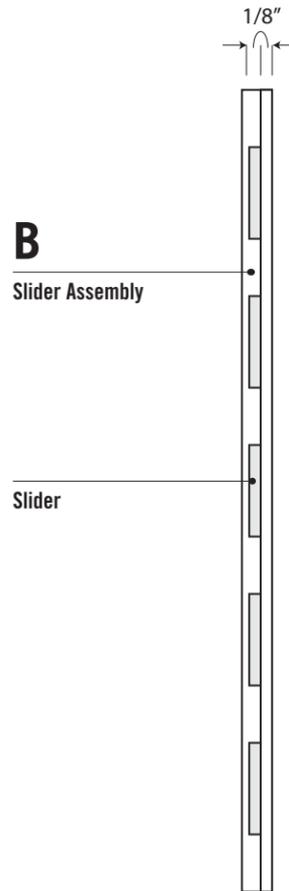

2 Side View / Half Size Part B



3 Plan View / Half Size Part B

A Tactile Plaque:

1/4" thick Photopolymer w/ raised graphics and Grade 2 Braille. Buff returns smooth and even to eliminate tooling marks. Paint all surfaces as indicated. Tip text as indicated.

Typography:

Myriad Pro Semibold, 1" Cap Height (Based on "E"), Kerned +50%. Use Myriad Pro Regular for Area Letter.

Grade 2 Braille:

Height, kerning & leading per requirements of the DOJ's 2010 ADA Standards for Accessible Design.

B Slider Assembly:

Layered construction of 0.125" slider, spacer and backplate with 0.090" Aluminum Cover. Laminate with full sheet adhesive, Align all returns smooth, no visible seams.

Cover Plate:

0.090" Steel sheet, cut to shape. Configured with brake formed taps at right side to hold Sliders in position. Configured with concealed Piano Hinge. Buff returns smooth and even to eliminate any tooling marks and to prevent any sharp edges. Paint finish all surfaces as indicated.

Spacer:

1/8" Acrylic plate, cut to shape configured as indicated to trap sliders. Buff returns smooth and even to eliminate any tooling marks. Configured with recess to accept Piano Hinge from Front Cover. Configured with recessed magnets to hold Cover Plate closed and secure. Paint finish all surfaces.

Slider:

1/8" Acrylic. Cut to shape. Configured with milled lip to hold insert in place when Front Cover is opened. Buff returns smooth and even to eliminate any tooling marks. Soften vertical back edges. Paint all surfaces as indicated. Back slider w/ teflon, felt or similar coating to avoid scratching and binding.

Backplate:


1/8" Acrylic, cut to size. Buff returns smooth and even to eliminate any tooling marks. Paint finish all surfaces.

Installation:


Concealed 3M VHB tape & silicone mount flush to wall adjacent to latch side of door. Locate 60" from top of plaque to finished floor. Position 2" from edge of Plaque to door frame. Designer will field verify exact mounting position.

Mark	Description	Date

Dimensions & shapes of all elements as shown on G3.D7a thru G3.D7c.




2 Plan View / Half Size
Part B - Shown w/o Cover




4 Plan View / Half Size
Part B - Shown w/o Cover & Inserts




6 Plan View / Half Size
Part B - Spacer shown only

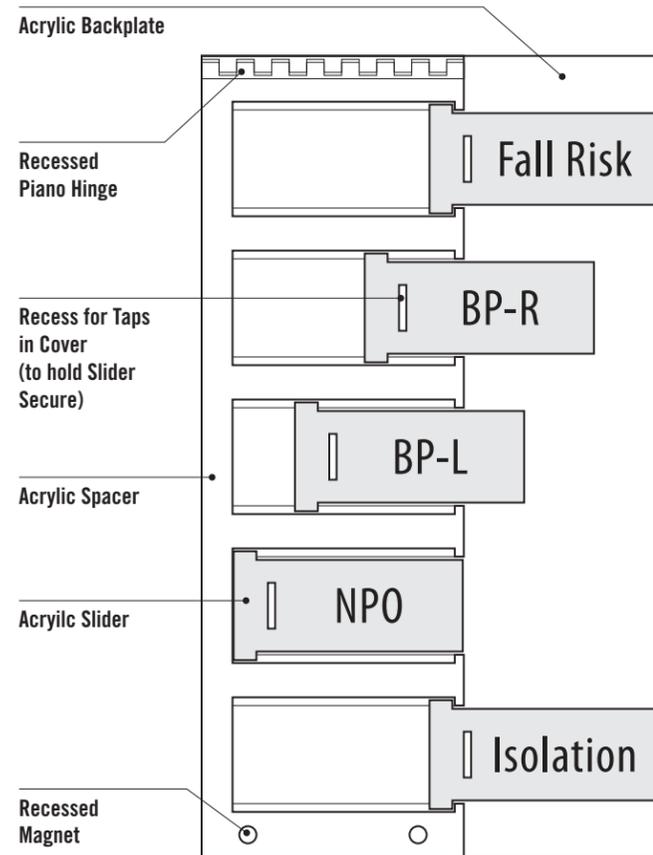

1 Elevation / Half Size
Part B - Shown w/o Cover

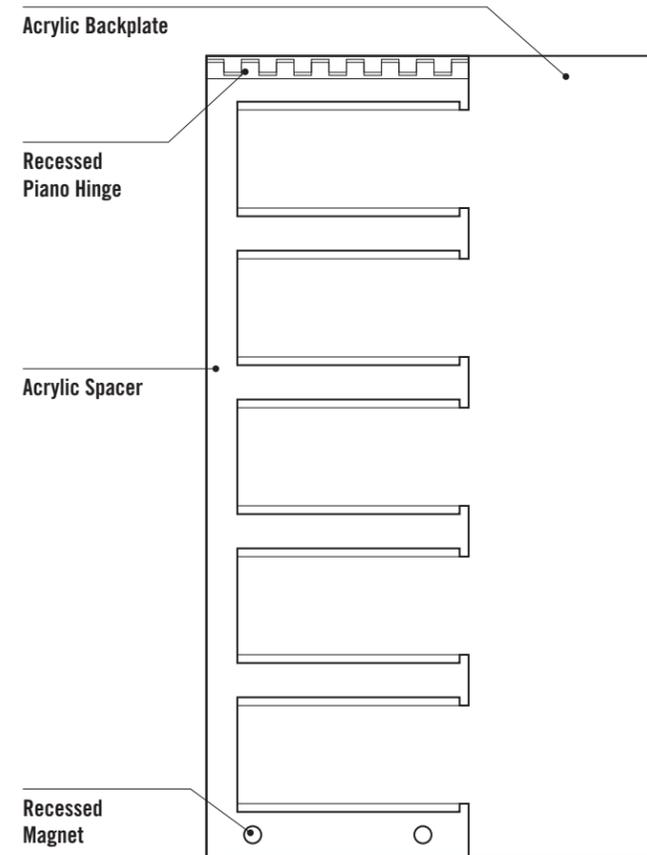


3 Elevation / Half Size
Part B - Shown w/o Cover & Inserts

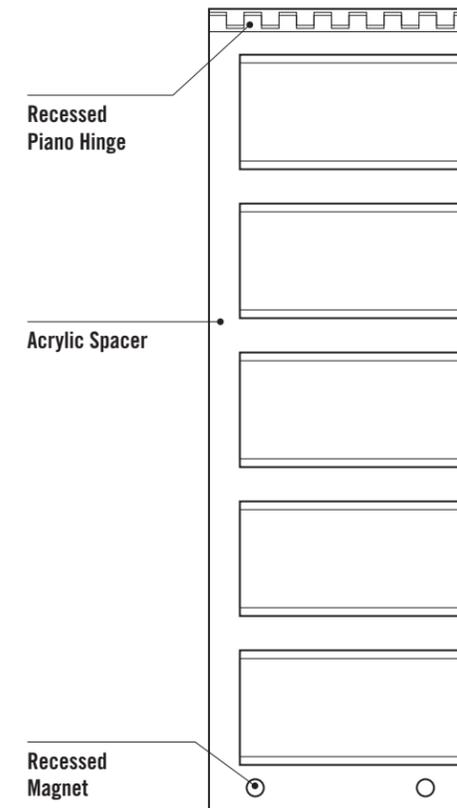

5 Elevation / Half Size
Part B - Spacer shown only

Mark	Description	Date


Dimensions & shapes of all elements as shown on G3.D7a thru G3.D7c.

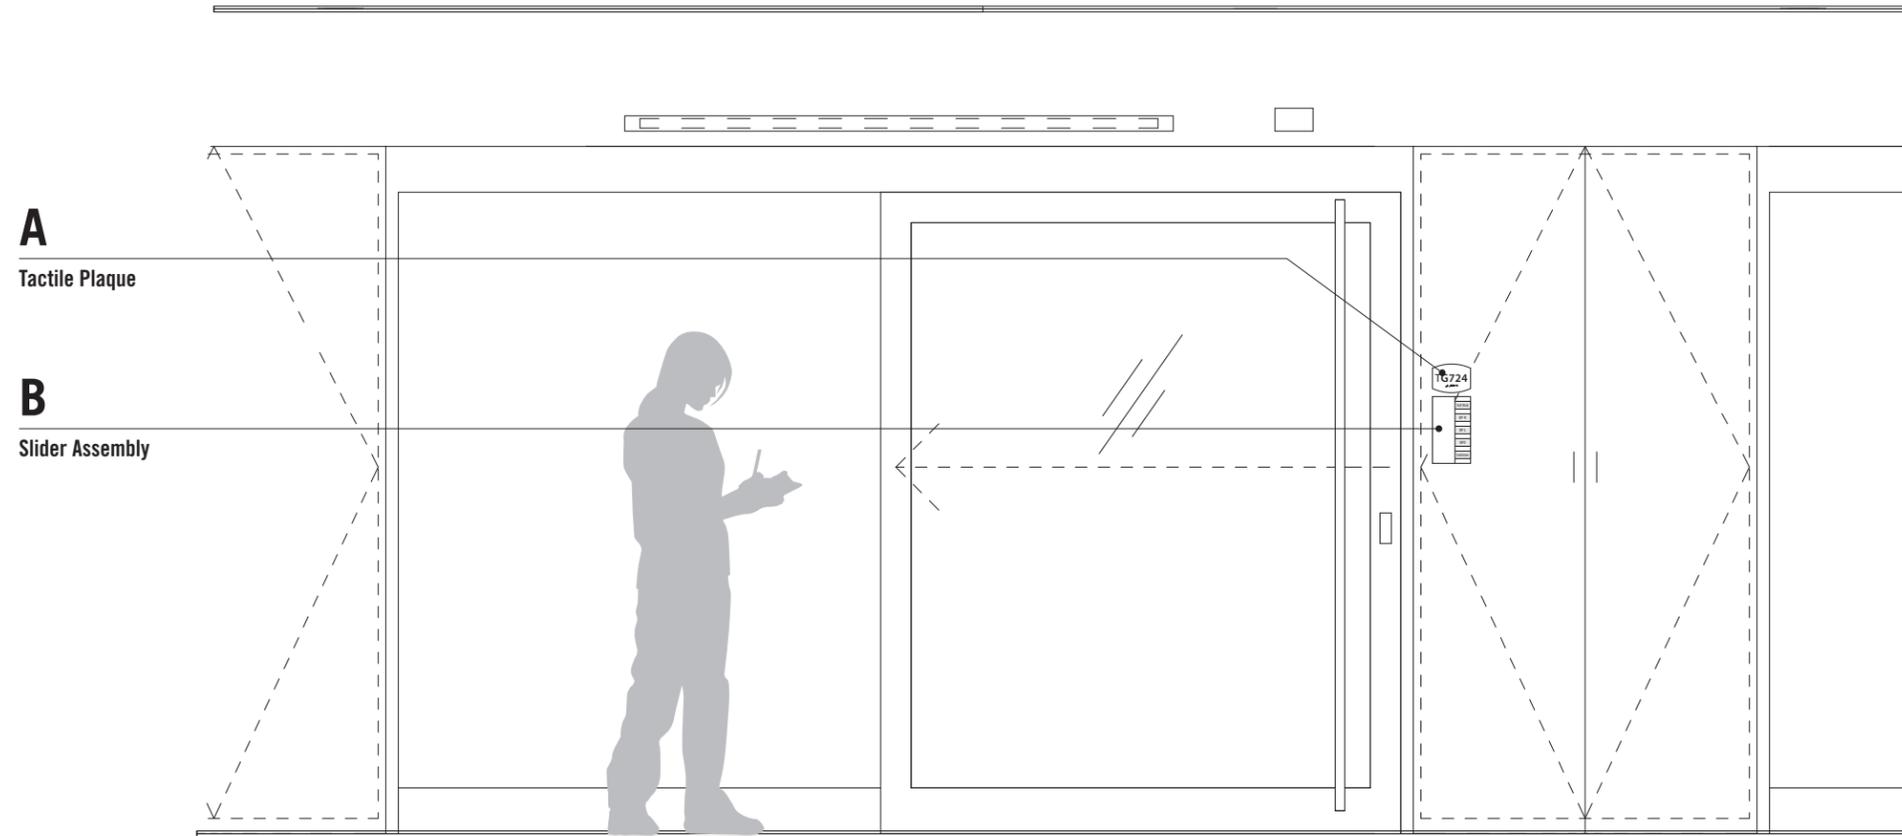


1 Elevation / 1/2" = 1'-0"

Mark	Description	Date


Dimensions & shapes of all elements as shown on G3.D8a

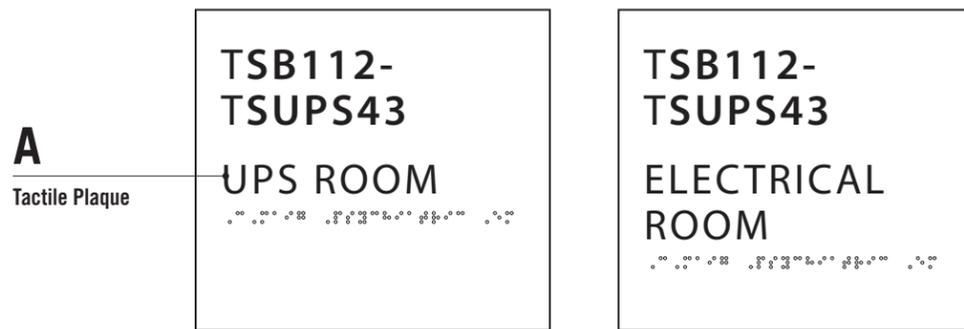


3 Elevation / 3" = 1'-0"
Alternate Layouts

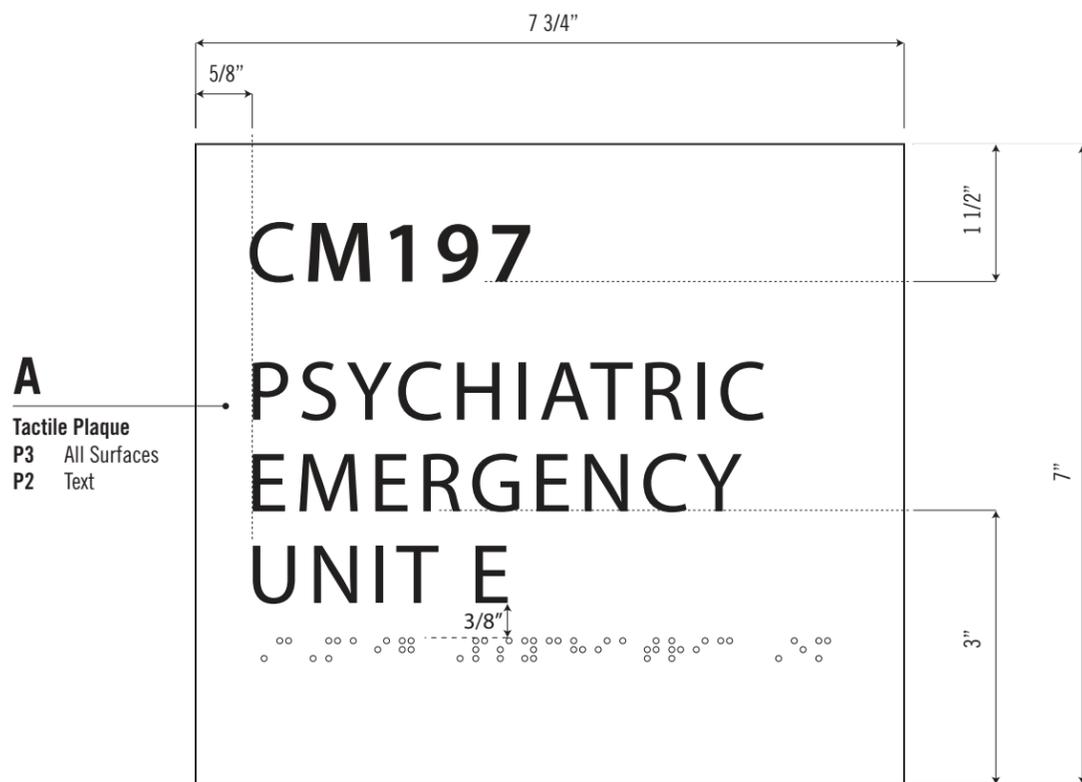

1 Elevation / Half Size

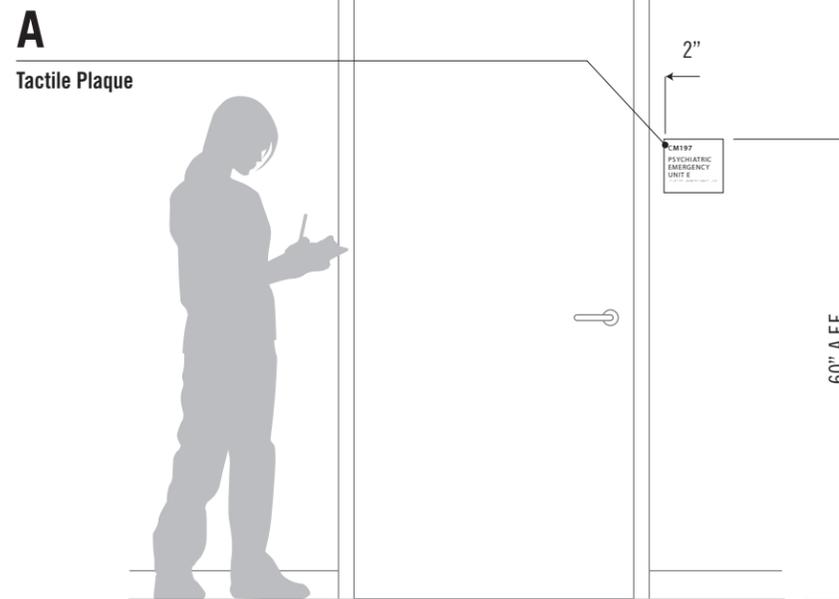

4 Elevation / 1/2" = 1'-0"

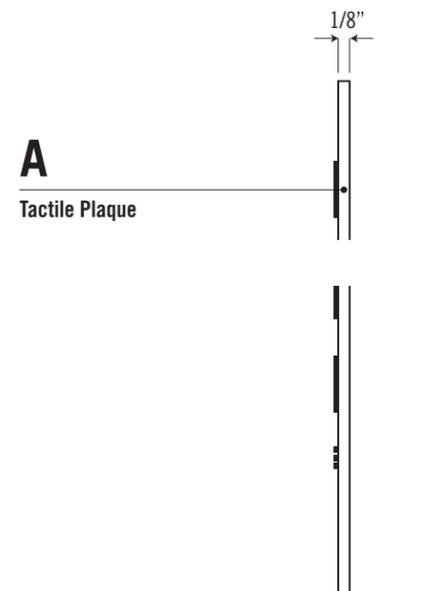

2 Side View / Half Size

A Tactile Plaque:
1/8" thick Photopolymer w/ raised graphics and Grade 2 Braille. Buff returns smooth and even to eliminate tooling marks. Paint all surfaces as indicated. Tip text as indicated.

Typography:
Myriad Pro Regular, 5/8" Cap Height (Based on "E"), Kerned +75%, Interline Spacing of 3/8". Use Myriad Pro Semibold for Area Letter.

Grade 2 Braille:
Height, kerning & leading per requirements of the DOJ's 2010 ADA Standards for Accessible Design.


Installation:
Concealed 3M VHB tape & silicone mount flush to wall adjacent to latch side of door. Locate 60" from top of plaque to finished floor. Position 2" from edge of Plaque to door frame. Note for outswinging door locations, locate sign so that a clear floor space of 18" x 18" minimum, centered on the tactile characters is provided beyond the arc of any door swing.

Mark	Description	Date


Dimensions & shapes of all elements as shown on G3.D9a.

A Engraved Plaque:
 Gravoply 2, 1/16" thick, 2ply, cut to size, buff returns smooth.
 21927 Grey Cap with White Core. Engrave text to expose core.

Typography:
 Myriad Pro Regular, 3/8" Cap Height (Based on "E").

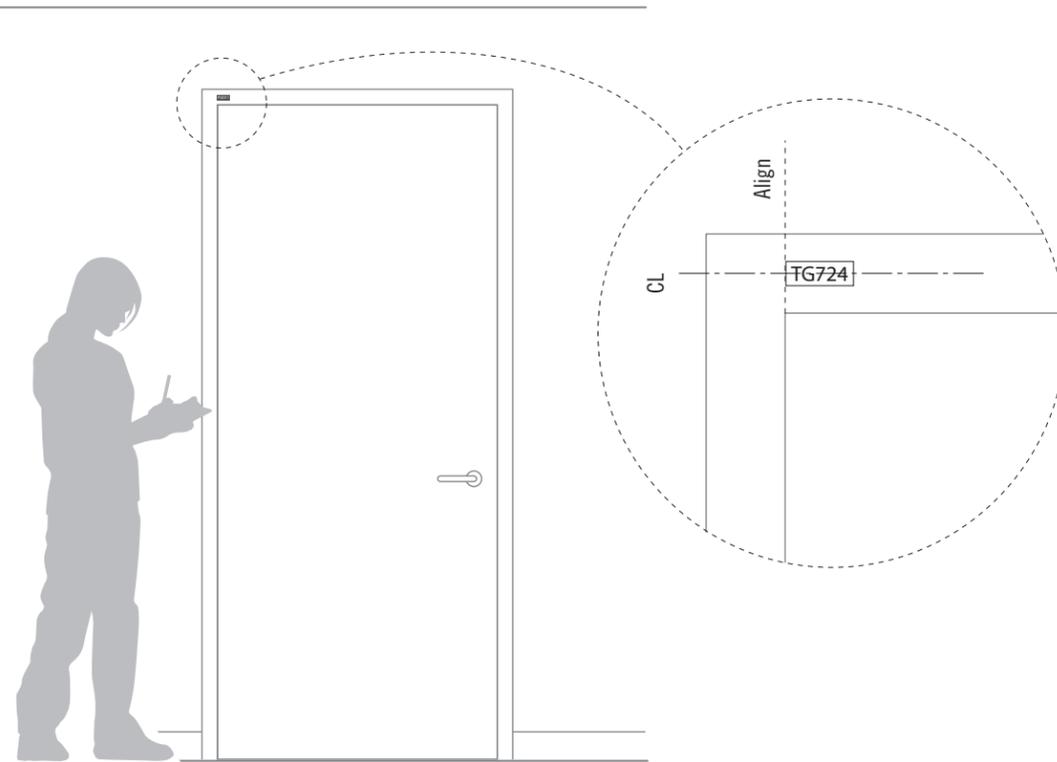


2 Elevation / 1/2" = 1'-0"

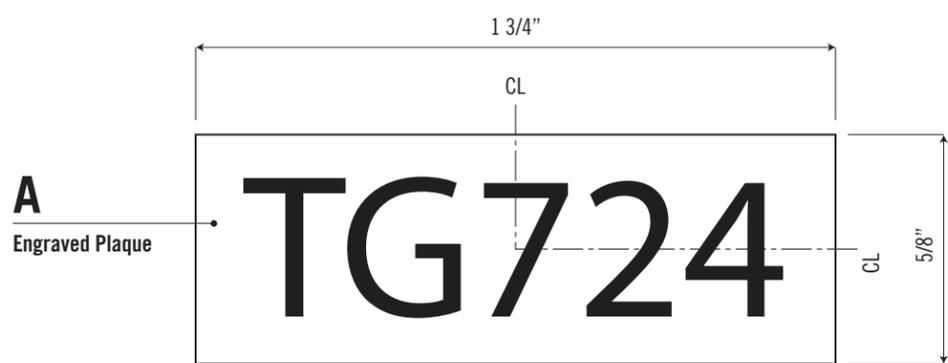


1 Elevation / Double Size

Mark	Description	Date


Dimensions & shapes of all elements as shown on G3.D10a thru G3.D10d.

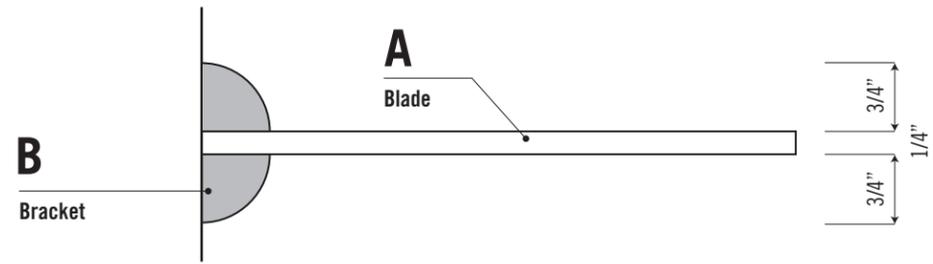


2 Plan View / Half Size
Size B

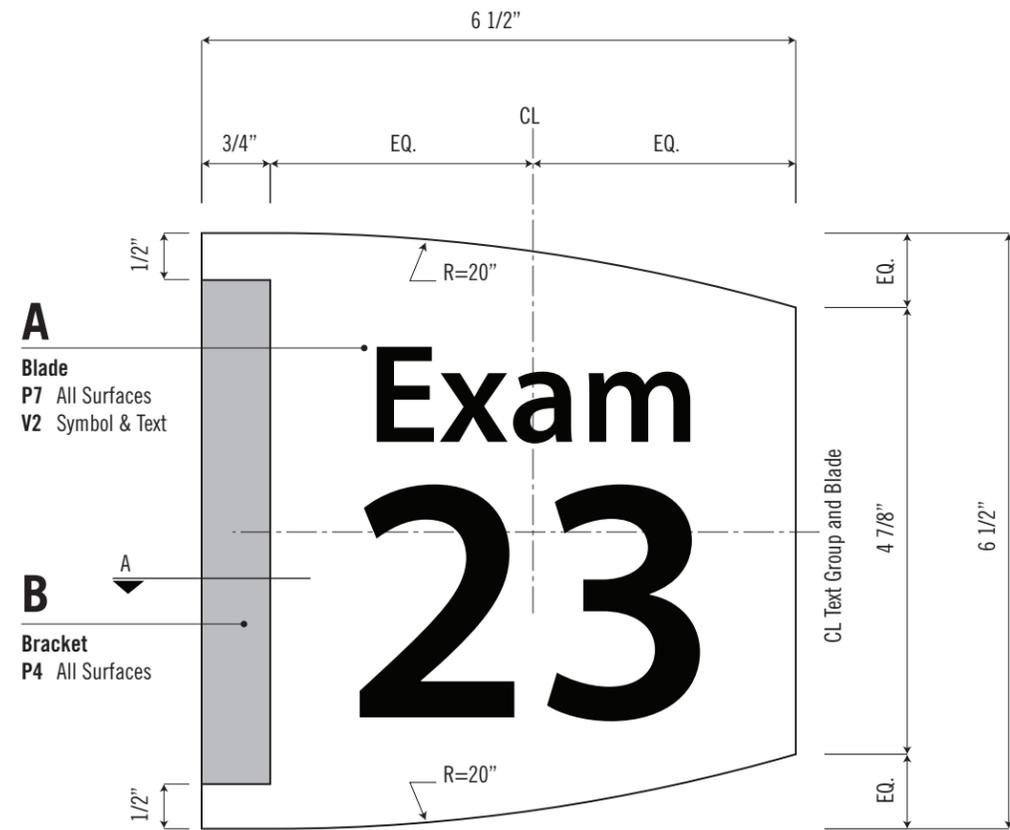

1 Elevation / Half Size
Size B

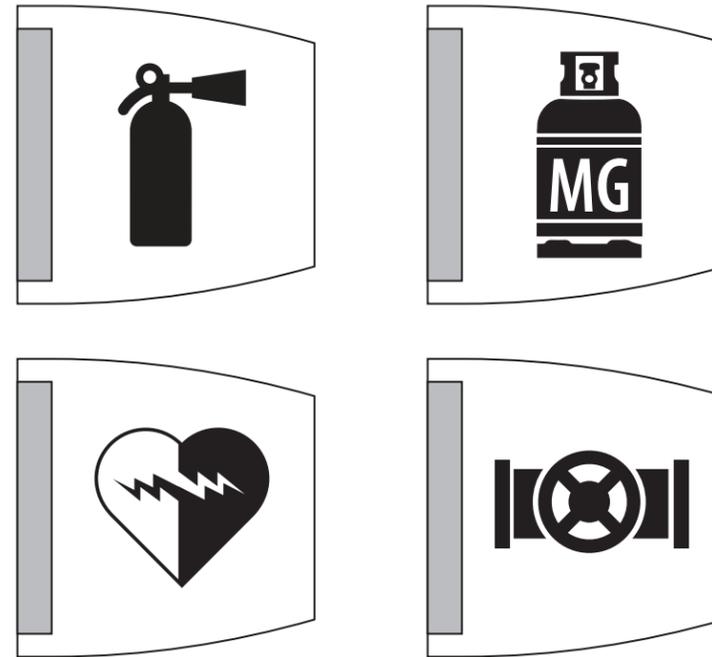


3 Elevation / 3" = 1'-0"
Size B - Alternate Layouts

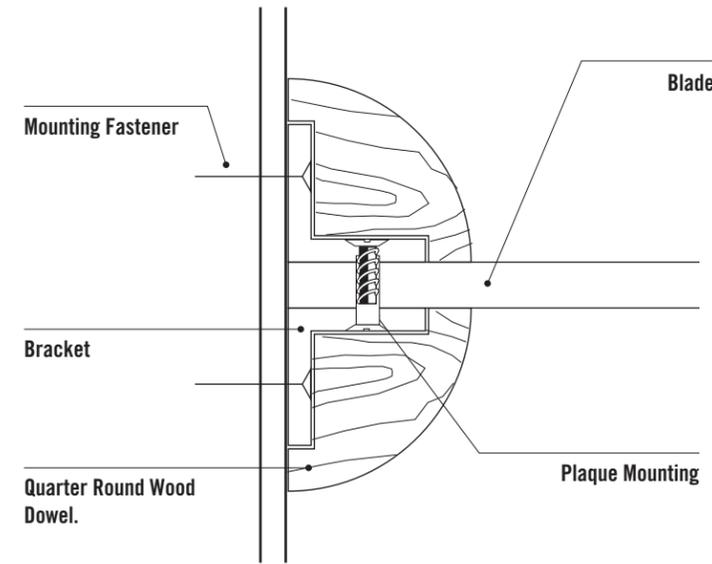


A Section Detail / Half Size
Schematic - Size B

Mark	Description	Date


Dimensions & shapes of all elements as shown on G3.D10a thru G3.D10d.

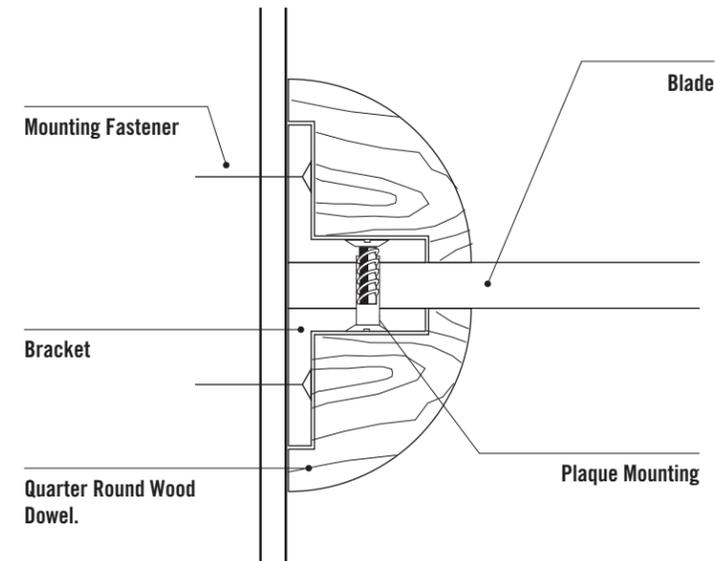

A Section Detail / Half Size
Schematic - Size B

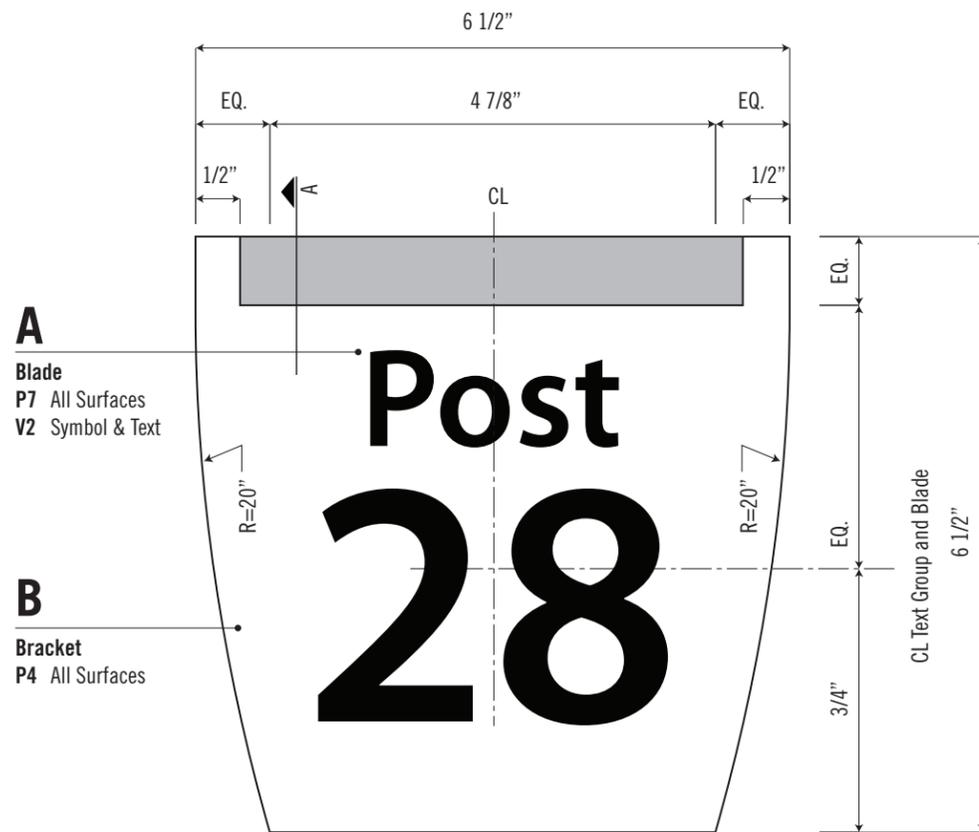


1 Elevation / Half Size
Size B - Ceiling Mount

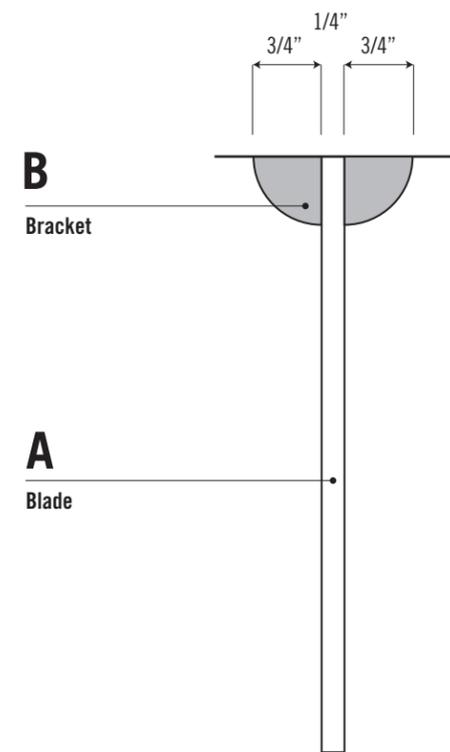


2 Side View / Half Size
Size B - Ceiling Mount

Mark	Description	Date

Dimensions & shapes of all elements as shown on G3.D10a thru G3.D10d.

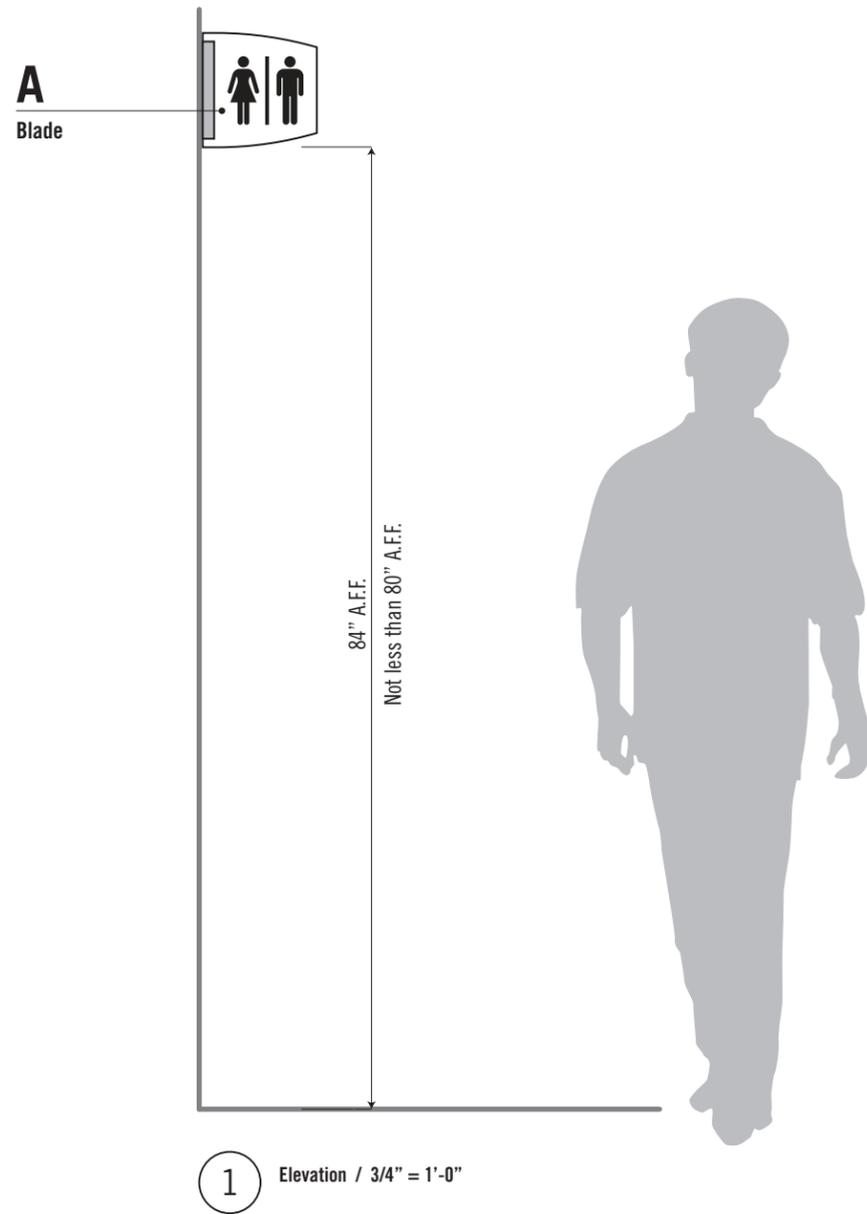


Mark	Description	Date

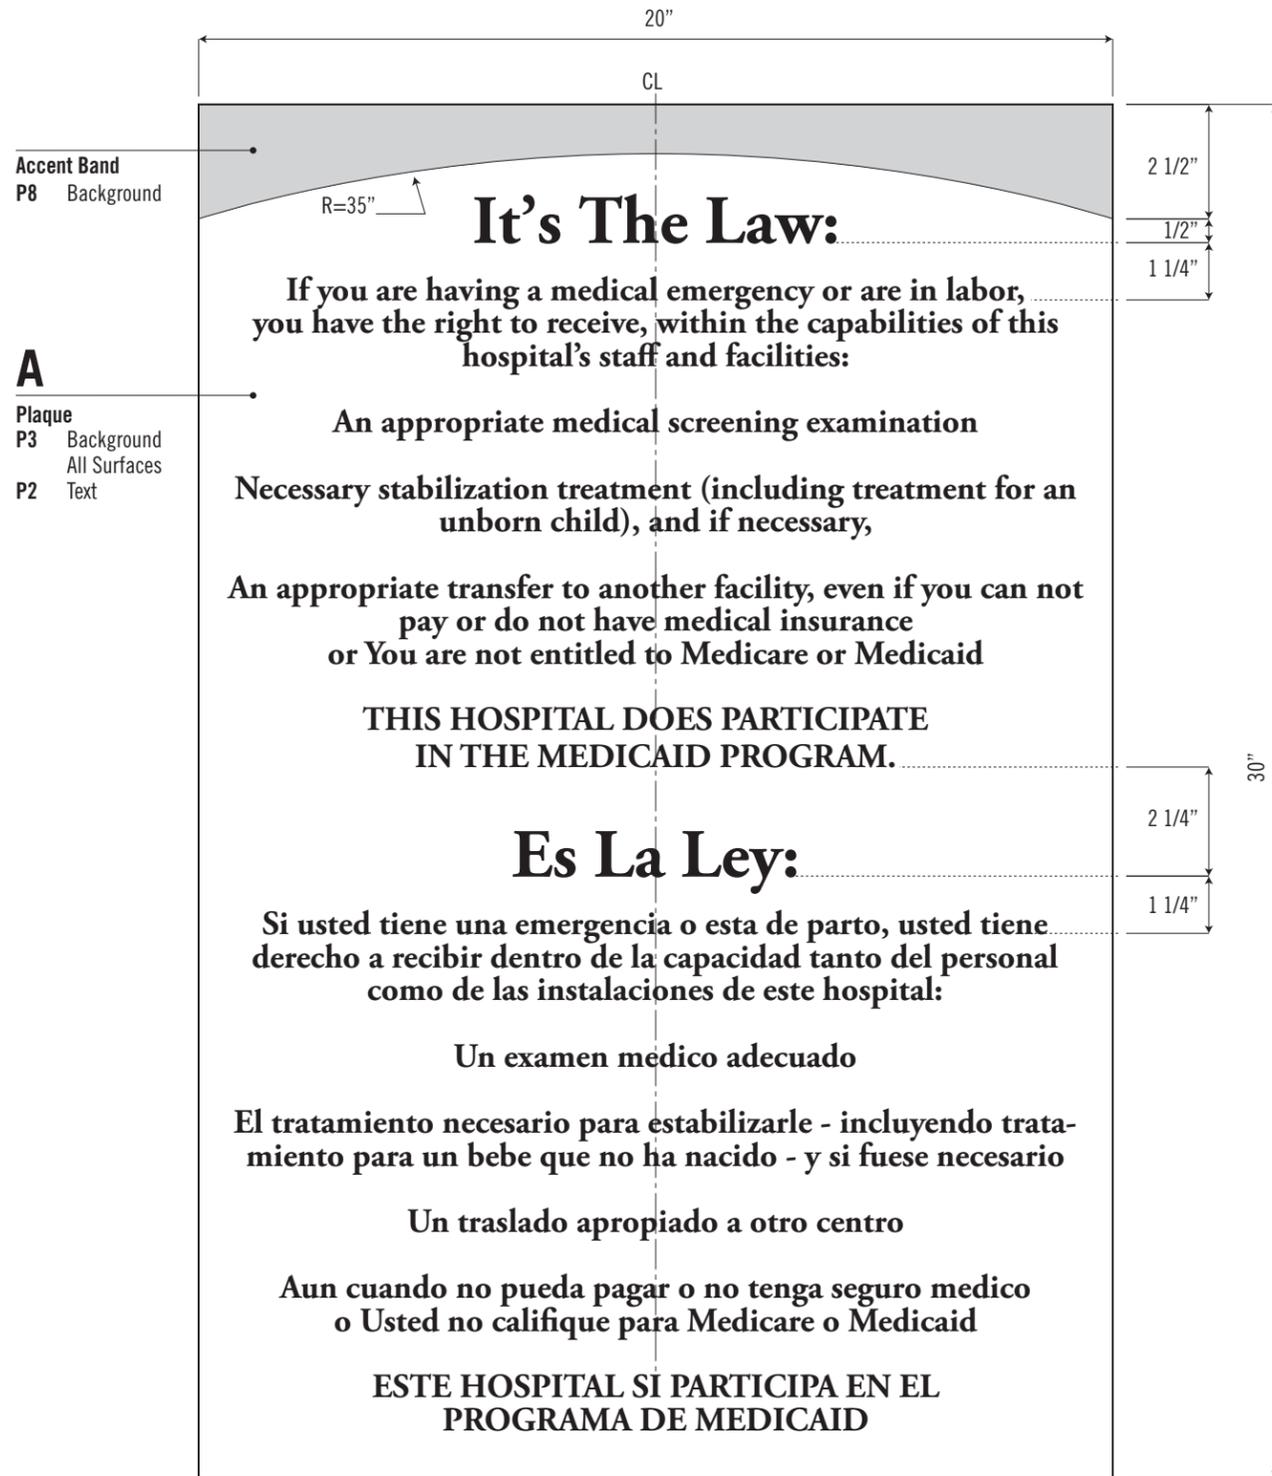


Accent Band
P8 Background

A
Plaque
P3 Background
All Surfaces
P2 Text

1 Elevation / 3" = 1'-0"
Size A

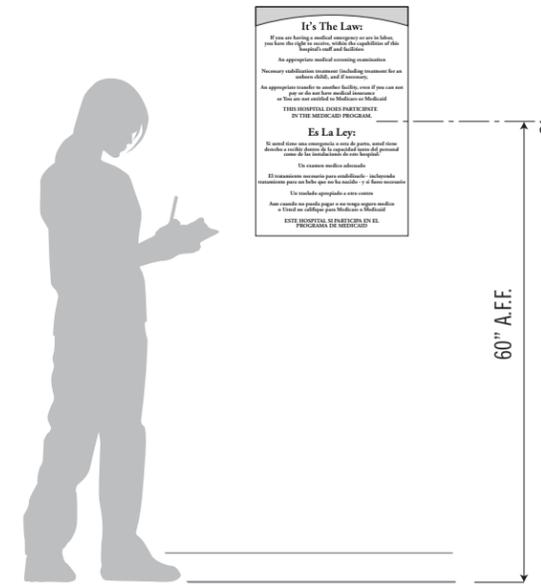

3 Elevation / 1/2" = 1'-0"

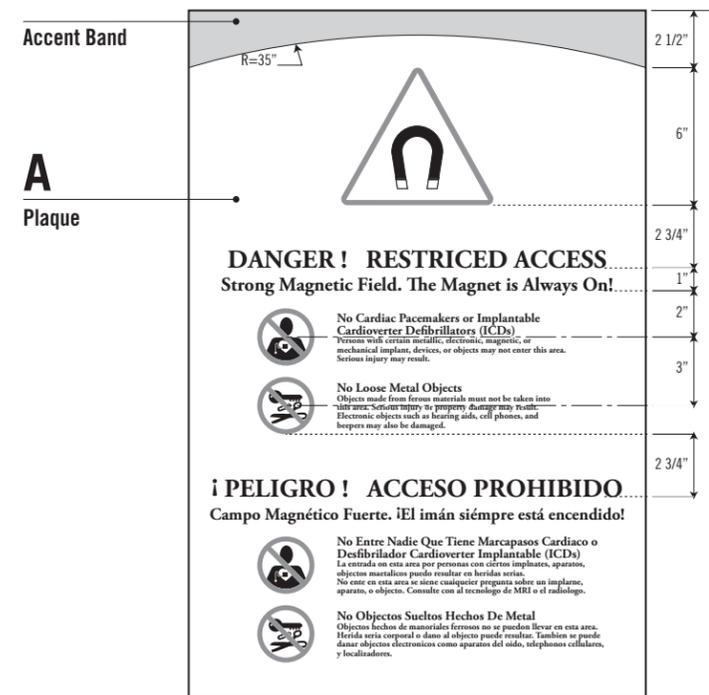

2 Elevation / 1 1/2" = 1'-0"
Size A - Alternate Message

Dimensions & shapes of all elements as shown on G3.M1a thru G3.M1b.

A Plaque:
1/8" Thick Acrylic, cut to size. Polish returns smooth & clear. Apply full bleed digital print to second surface.

Typography:
Typical Artwork provided by designer.


Installation:
Concealed VHB tape and silicone mount flush to wall. Locate 60" to centerline of plaque from finished floor. Designer to field verify exact mounting locations.

Mark	Description	Date




Dimensions & shapes of all elements as shown on G3.M1a thru G3.M1b.




2 Elevation / 3" = 1'-0"
Size B - Alternate Layout

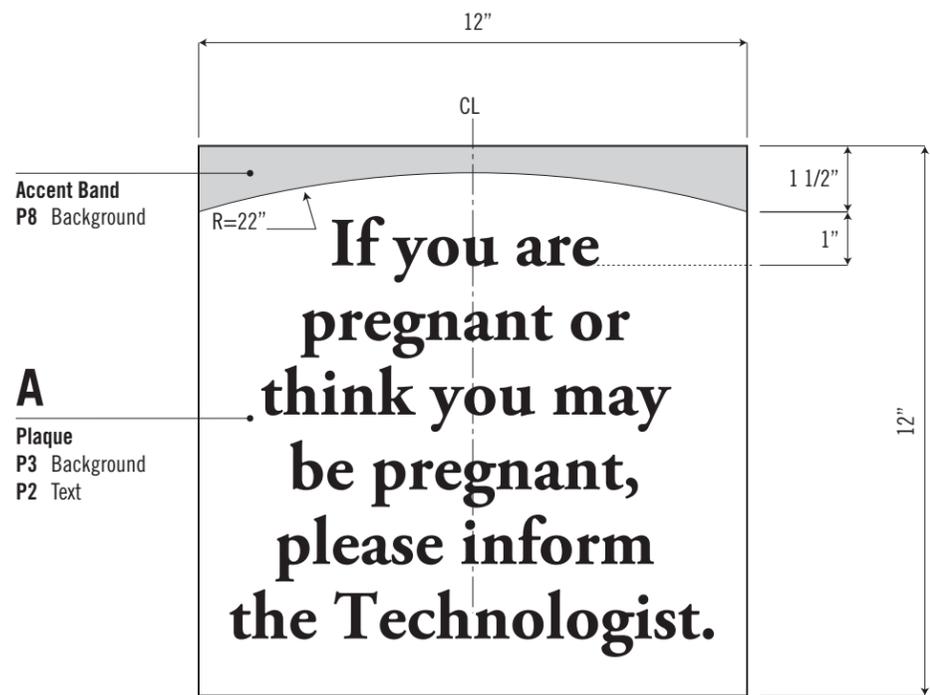

1 Elevation / 3" = 1'-0"
Size B

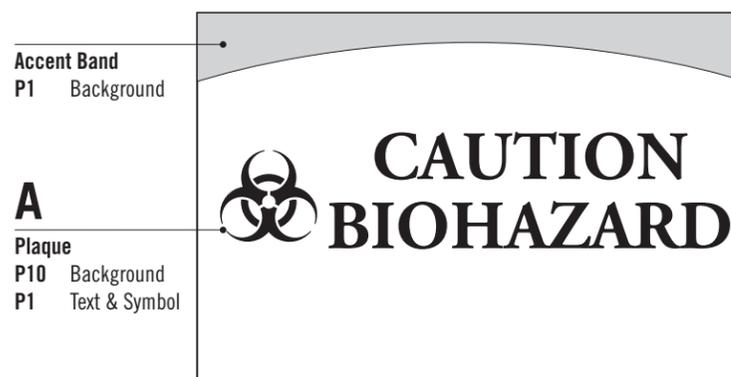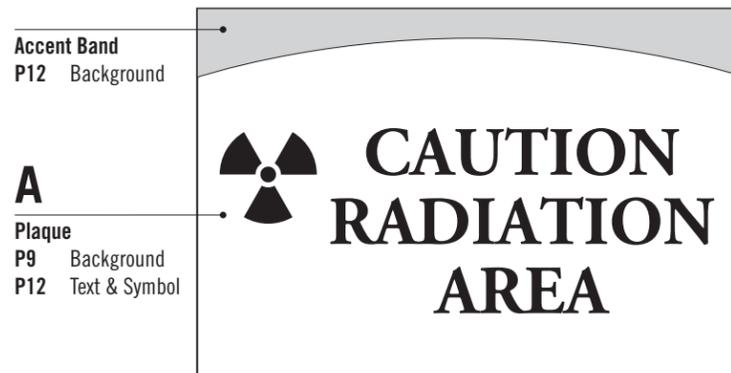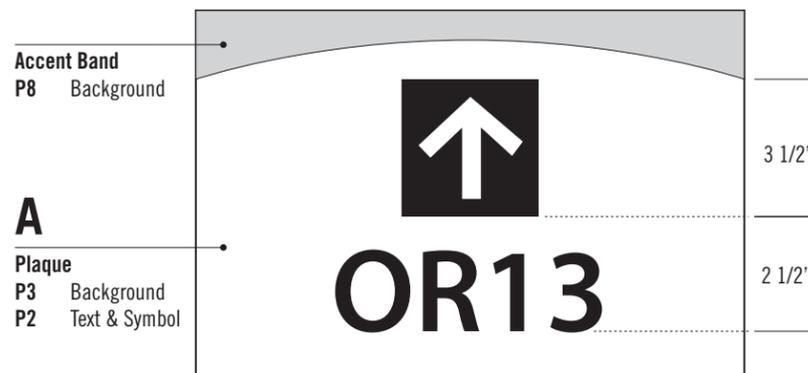

3 Elevation / 3" = 1'-0"
Size C - Alternate Layouts

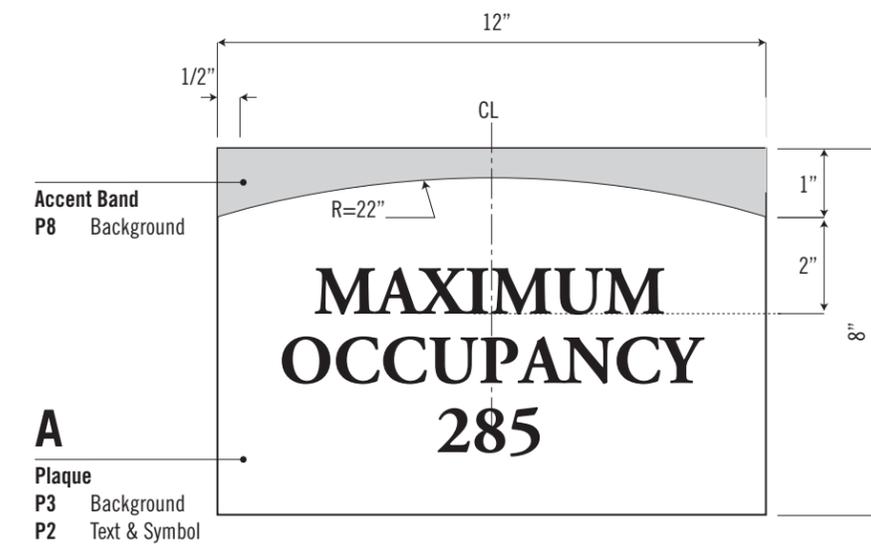

4 Elevation / 3" = 1'-0"
Size C

Mark	Description	Date


Dimensions & shapes of all elements as shown on G3.M2a.

A Plaque:
1/8" Thick Clear Non-Glare Acrylic Plate, cut to size. Polish returns clear, even and smooth. Apply full bleed subsurface Digital Print.

Typography:
Myriad Pro Bold, 3/4" Cap Height (Based on "E"), 1/2" Interline spacing, except as noted. Use Myriad Pro Semibold for EXIT.

Symbol:
Size as indicated.

Installation:
Concealed 3M VHB tape mount flush to door. Locate as indicated.

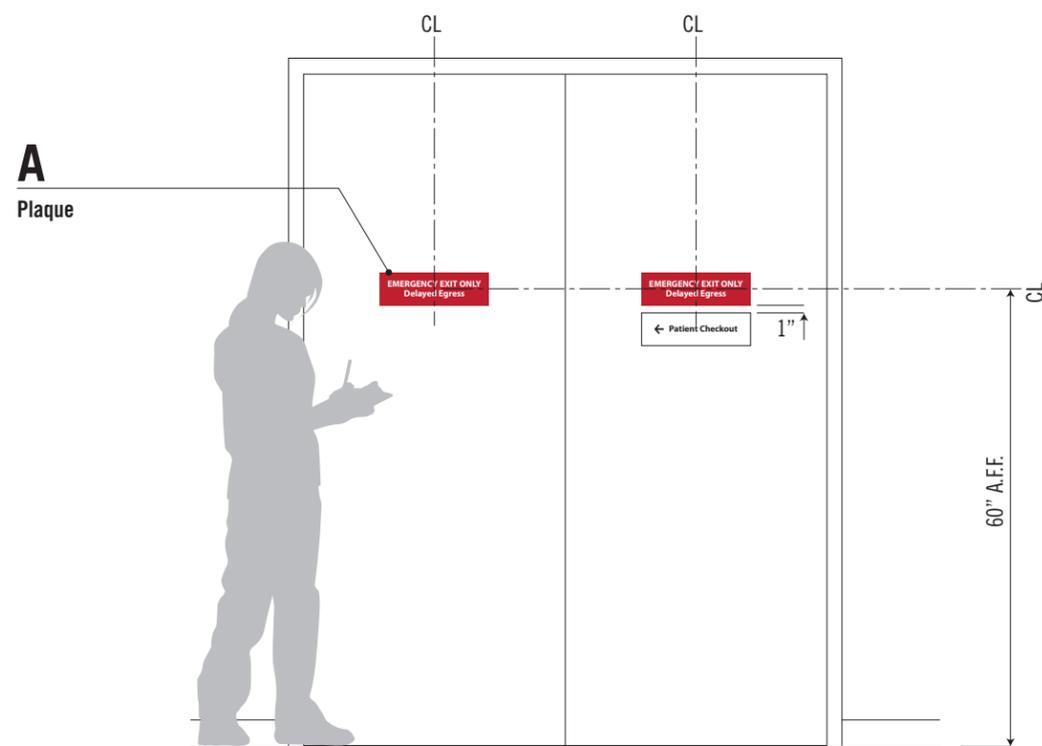


3 Elevation / 3" = 1'-0"



1 Elevation / 3" = 1'-0"

A
Plaque
P8 Background
P2 Text

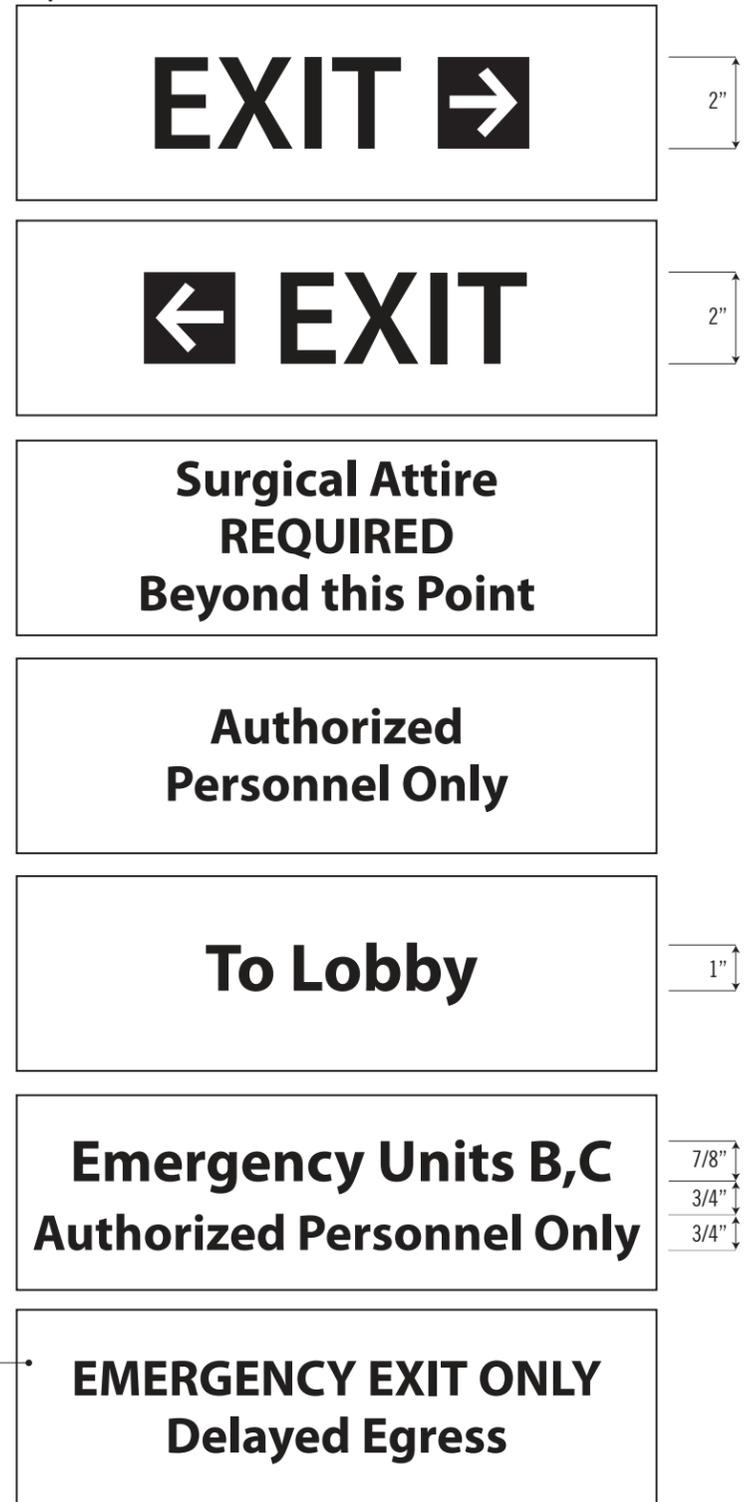

2 Elevation / 3" = 1'-0"
Alternate Layouts

A
Plaque

Mark	Description	Date




Dimensions & shapes of all elements as shown on G3.M3a thru G3.M3b.

A Vinyl:
3M computer cut vinyl, clean surface, apply vinyl to first surface for tinted windows and second surface for clear windows.

Typography:
Myriad Pro Semibold, 1" Cap Height, 3/4" Interline spacing. Use Myriad Pro Regular for Area Letter and Room Name.


Symbol:
3" Symbol Height, 8" Logo Height.

Installation:
Clean surface & apply Vinyl. Sign contractor to verify all as-built conditions prior to fabrication including dimensions and indicate on shop drawings.

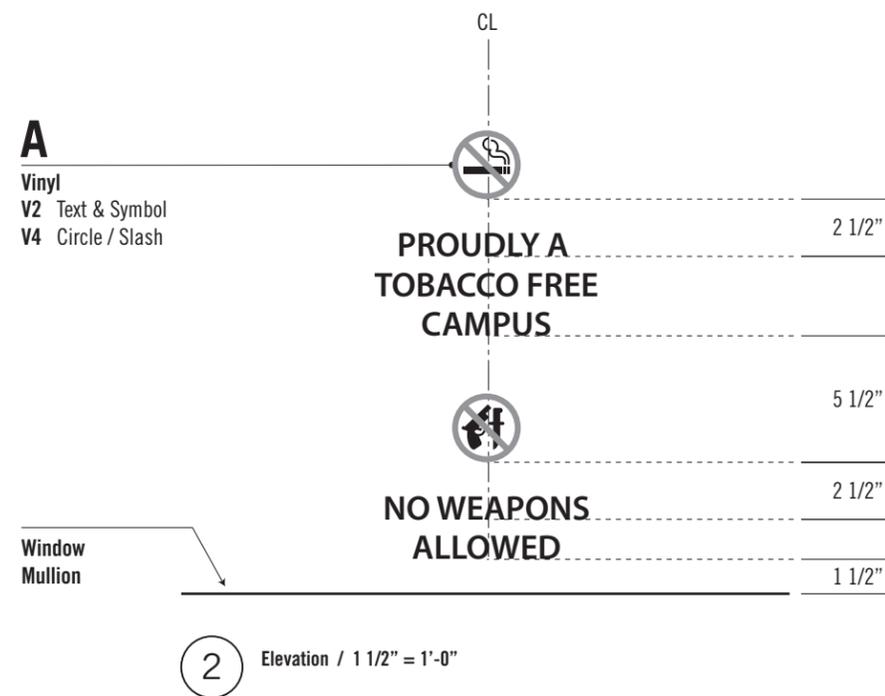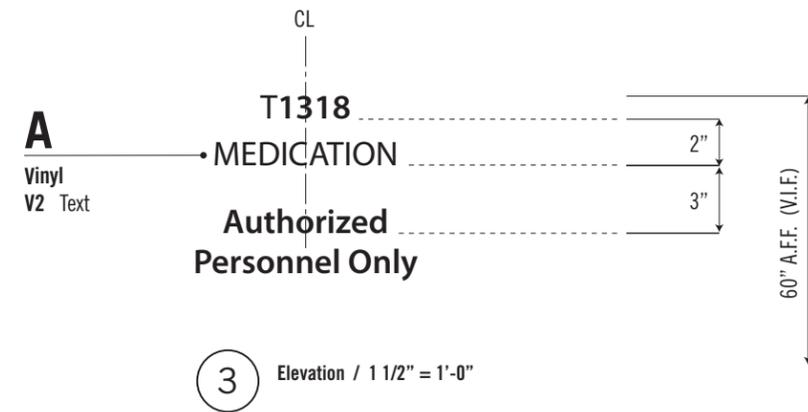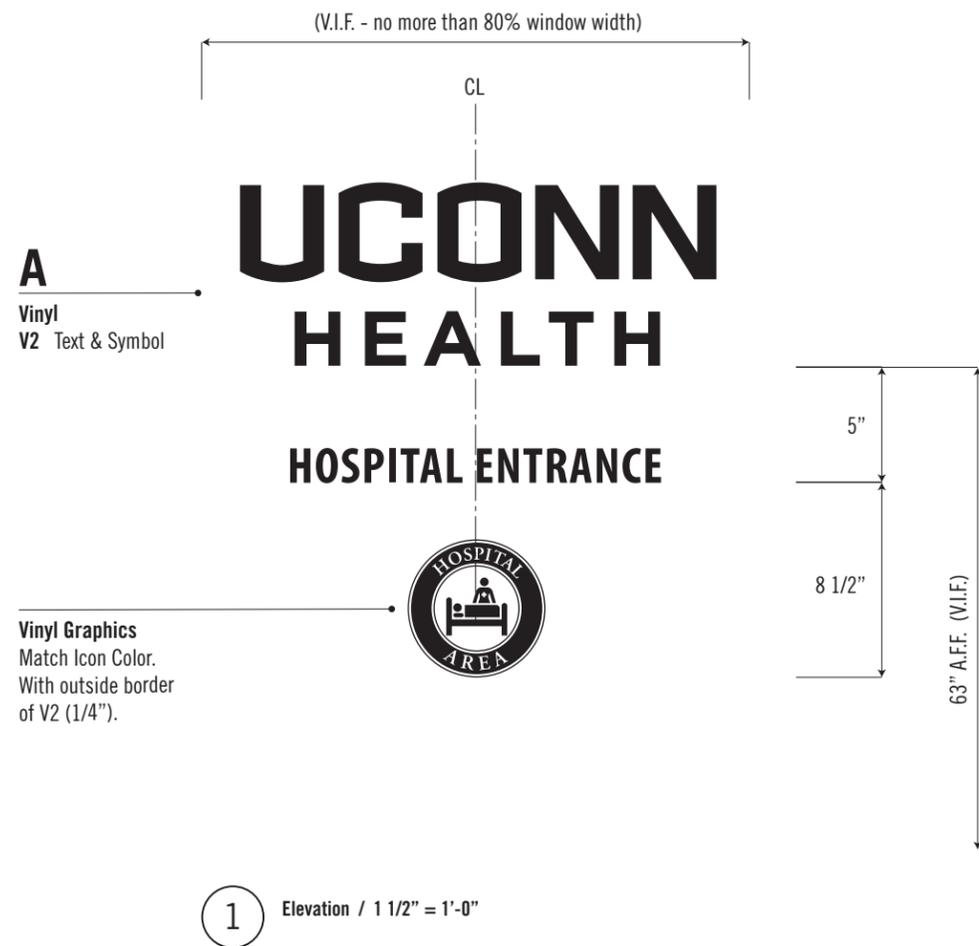


Mark	Description	Date

Dimensions & shapes of all elements as shown on G3.M3a thru G3.M3b.

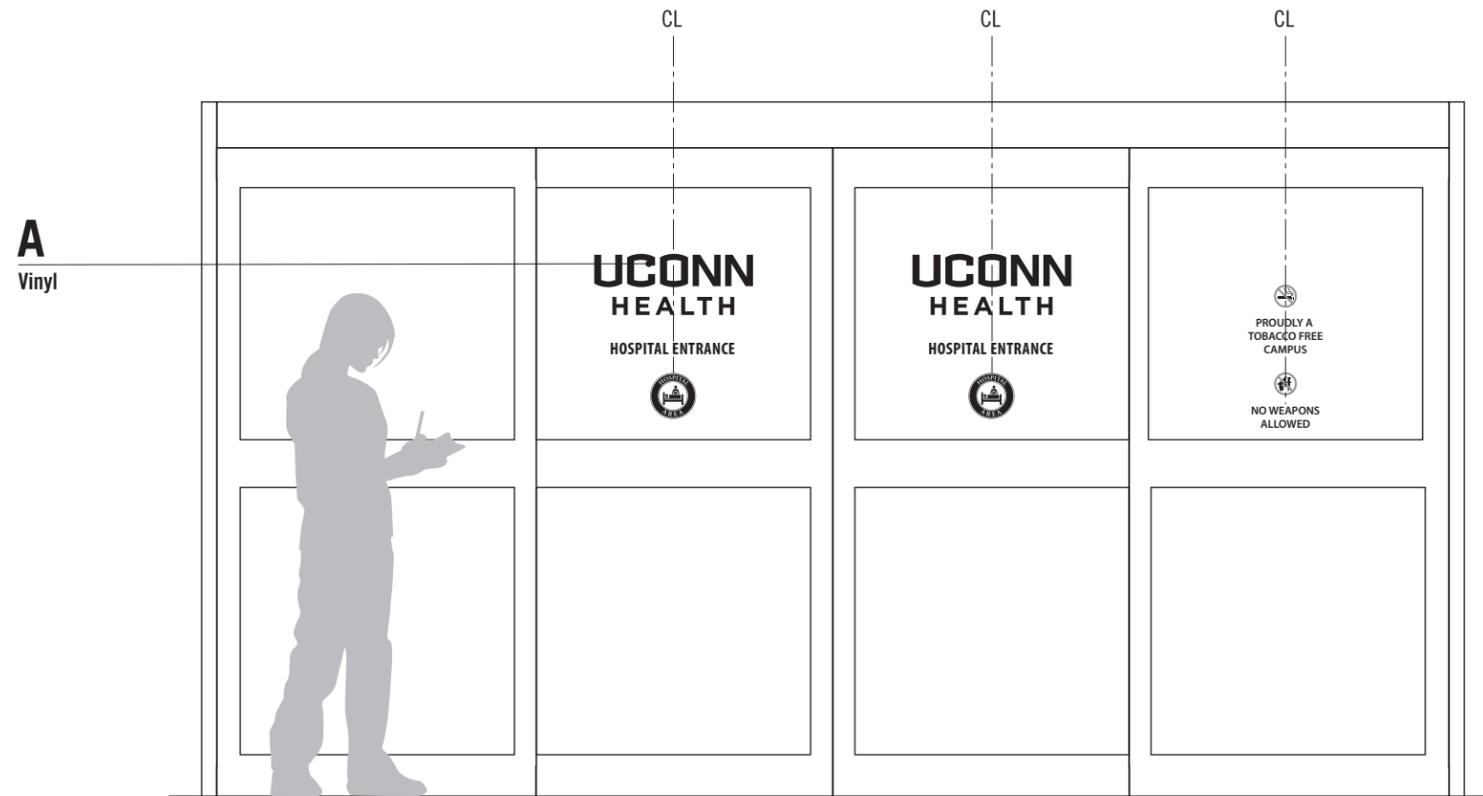


1 Elevation / 1/2" = 1'-0"

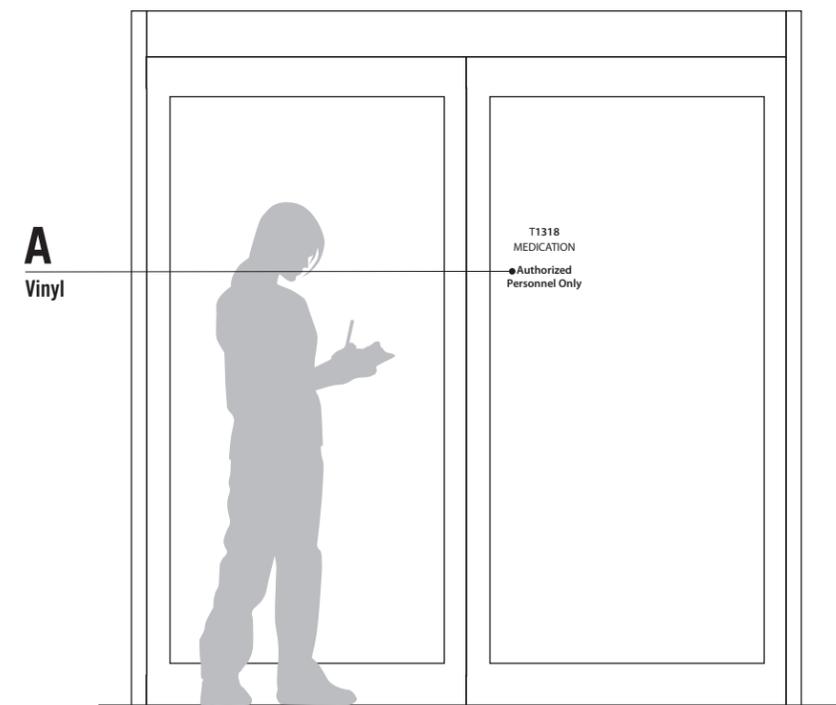

2 Elevation / 1/2" = 1'-0"


Mark	Description	Date

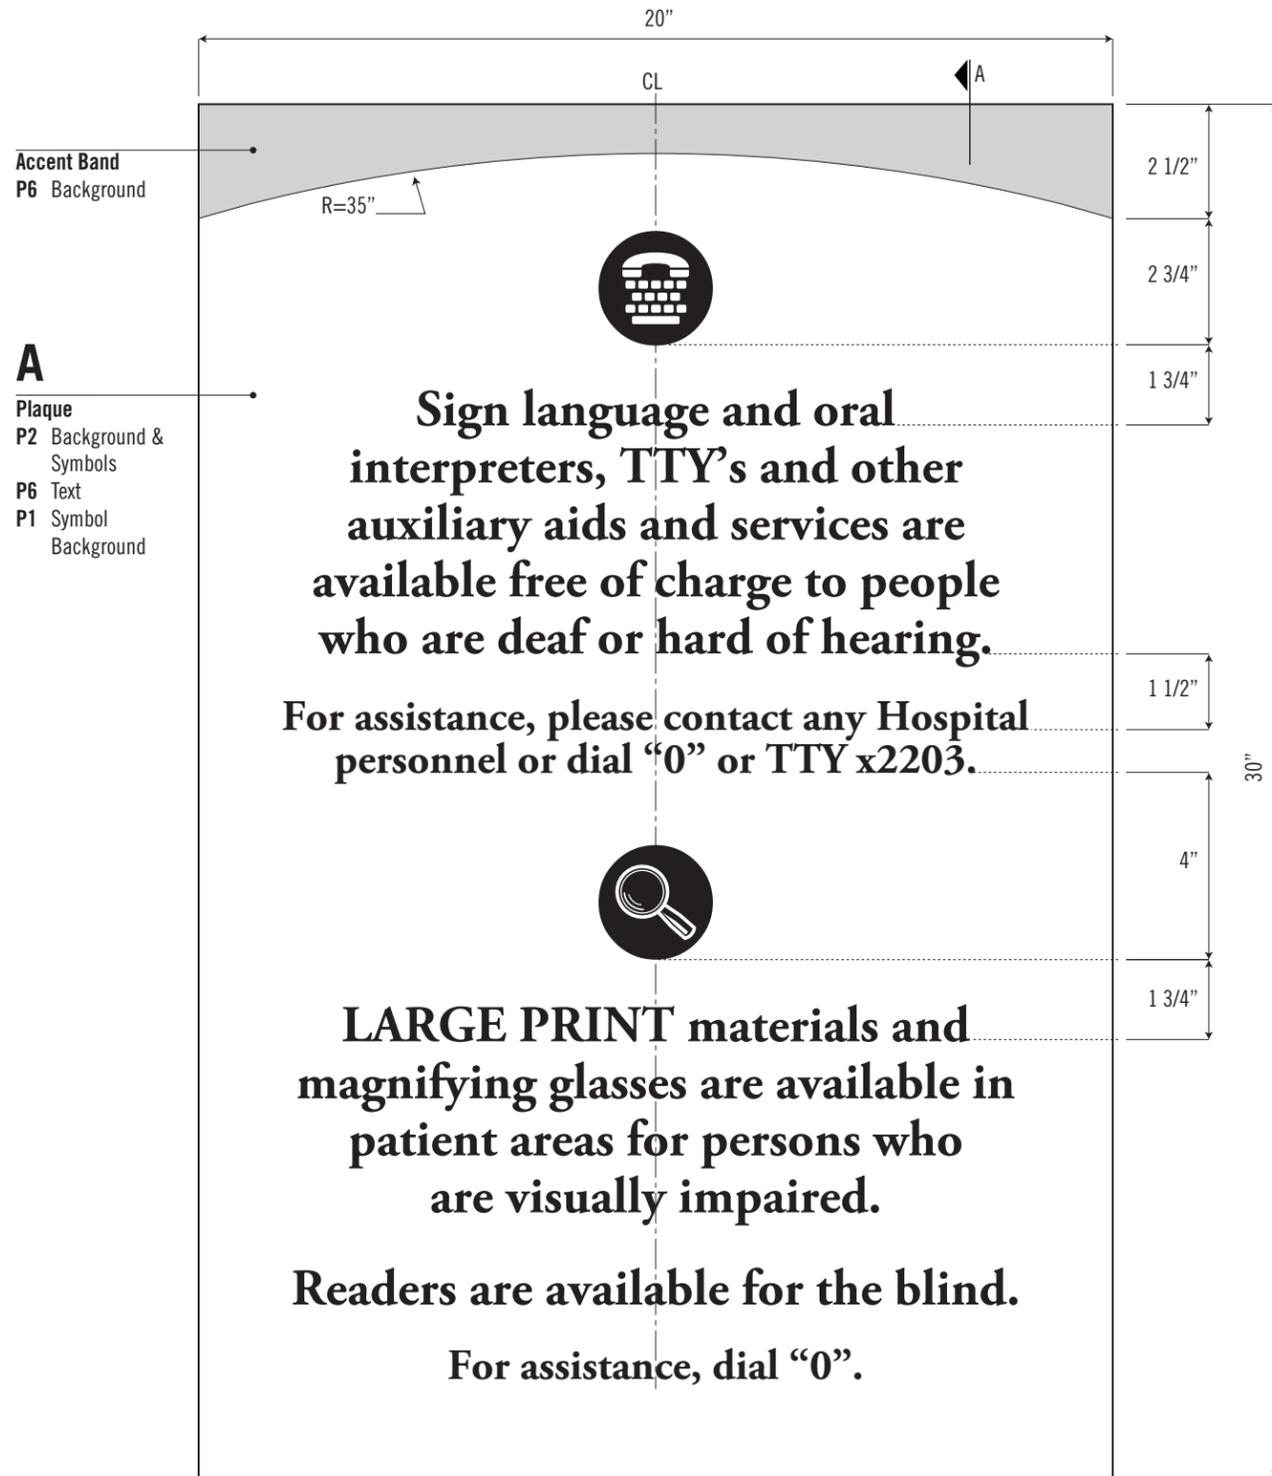

Accent Band
P6 Background

A
Plaque
P2 Background & Symbols
P6 Text
P1 Symbol Background

1 Elevation / 3" = 1'-0"
Size A

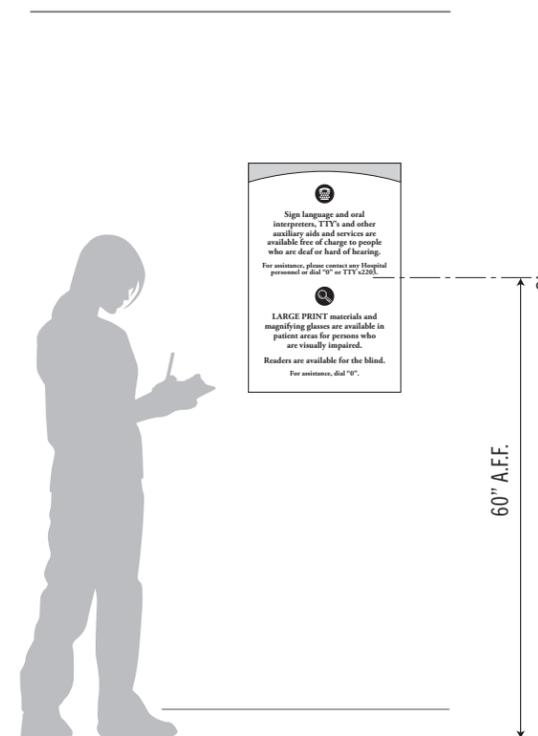

2 Elevation / 1/2" = 1'-0"

Dimensions & shapes of all elements as shown on G3.M4a thru G3.M4d.

A Plaque:
1/8" Thick Clear Non-Glare Acrylic, cut to size. Polish returns even, smooth & clear. Apply full bleed digital print to second surface.

Typography:
Size A: Adobe Garamond Pro Bold, 3/4" Cap Height (Based on "E"), 7/16" Interline Spacing. Symbol height of 2". Concealed VHB tape and silicone mount flush to door. Locate 60" to centerline of plaque from finished floor.
Size B: Adobe Garamond Pro Bold, 3/4" Cap Height (Based on "E"), 7/16" Interline Spacing. Symbol height of 2". Concealed VHB tape and silicone mount flush to door. Locate 60" to centerline of plaque from finished floor.
Size C: Adobe Garamond Pro Bold, 3/4" Cap Height (Based on "E"), 7/16" Interline Spacing. Symbol height of 2". Concealed VHB tape and silicone mount flush to door. Locate 60" to centerline of plaque from finished floor.

B Panel:
1/4" Thick Clear Non-Glare Acrylic, cut to size. Polish returns even, smooth & clear. Apply full bleed digital print to second surface. Concealed glue securely to base.

Typography:
Adobe Garamond Pro Bold, 3/4" Cap Height (Based on "E"), 7/16" Interline Spacing.


Symbol:
Height of 2".

C Base:
1" Thick Acrylic block, cut to length & route profile. Buff smooth. Route groove, configured to hold Panel. Paint Finished. Apply thin Black felt pad inset from edges by 1/4" to bottom of Base.


Installation:
Concealed VHB tape and silicone mount flush to wall. Locate 60" to centerline of plaque from finished floor. Exact location to be field verified.

Mark	Description	Date


Dimensions & shapes of all elements as shown on G3.M4a thru G3.M4d..

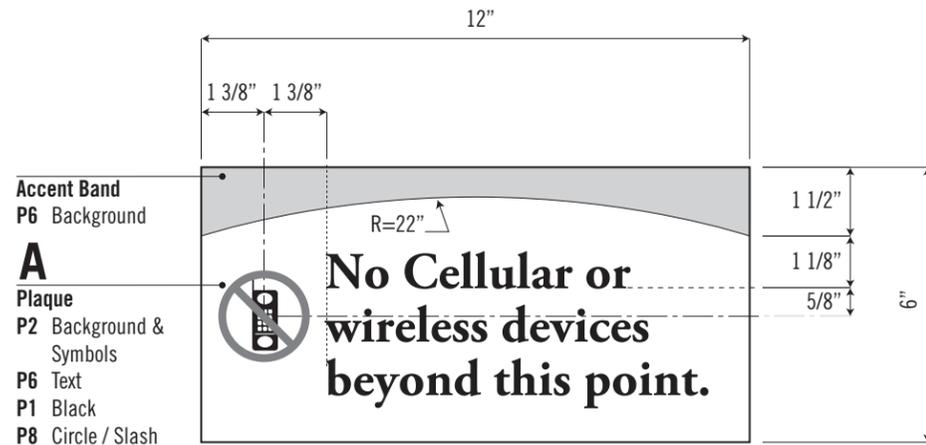


2 Elevation / 3" = 1'-0"
Size C

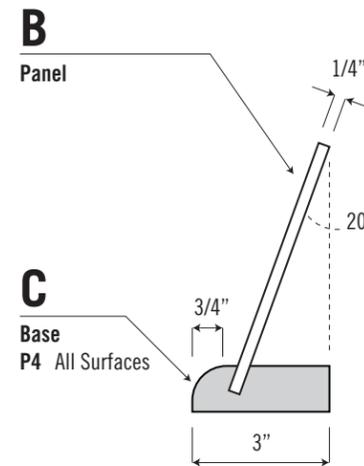

4 Elevation / 3" = 1'-0"
Size D

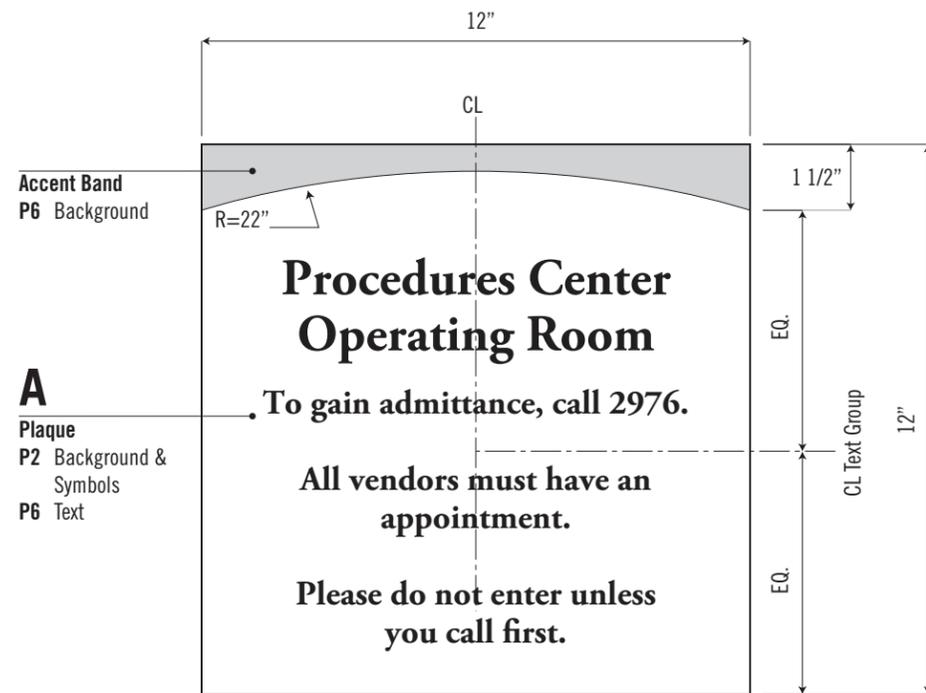


1 Elevation / 3" = 1'-0"
Size A

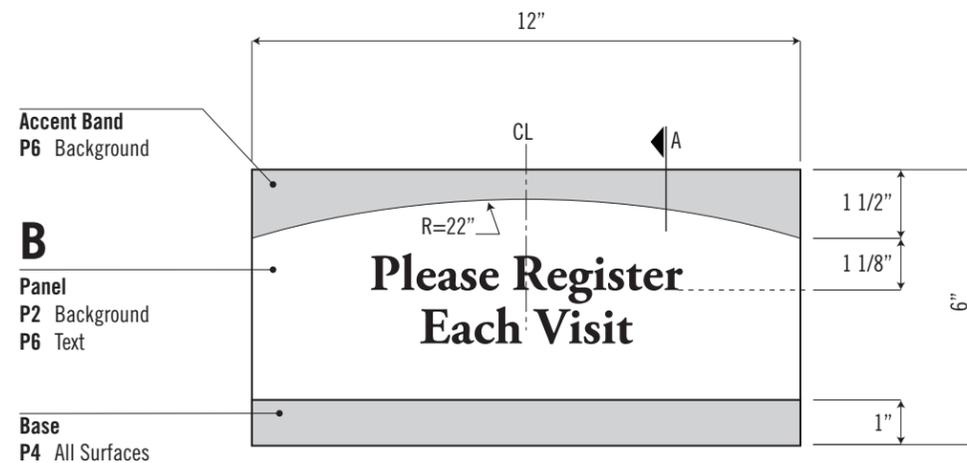


3 Elevation / 3" = 1'-0"
Size D

Mark	Description	Date

Dimensions & shapes of all elements as shown on G3.M5a.

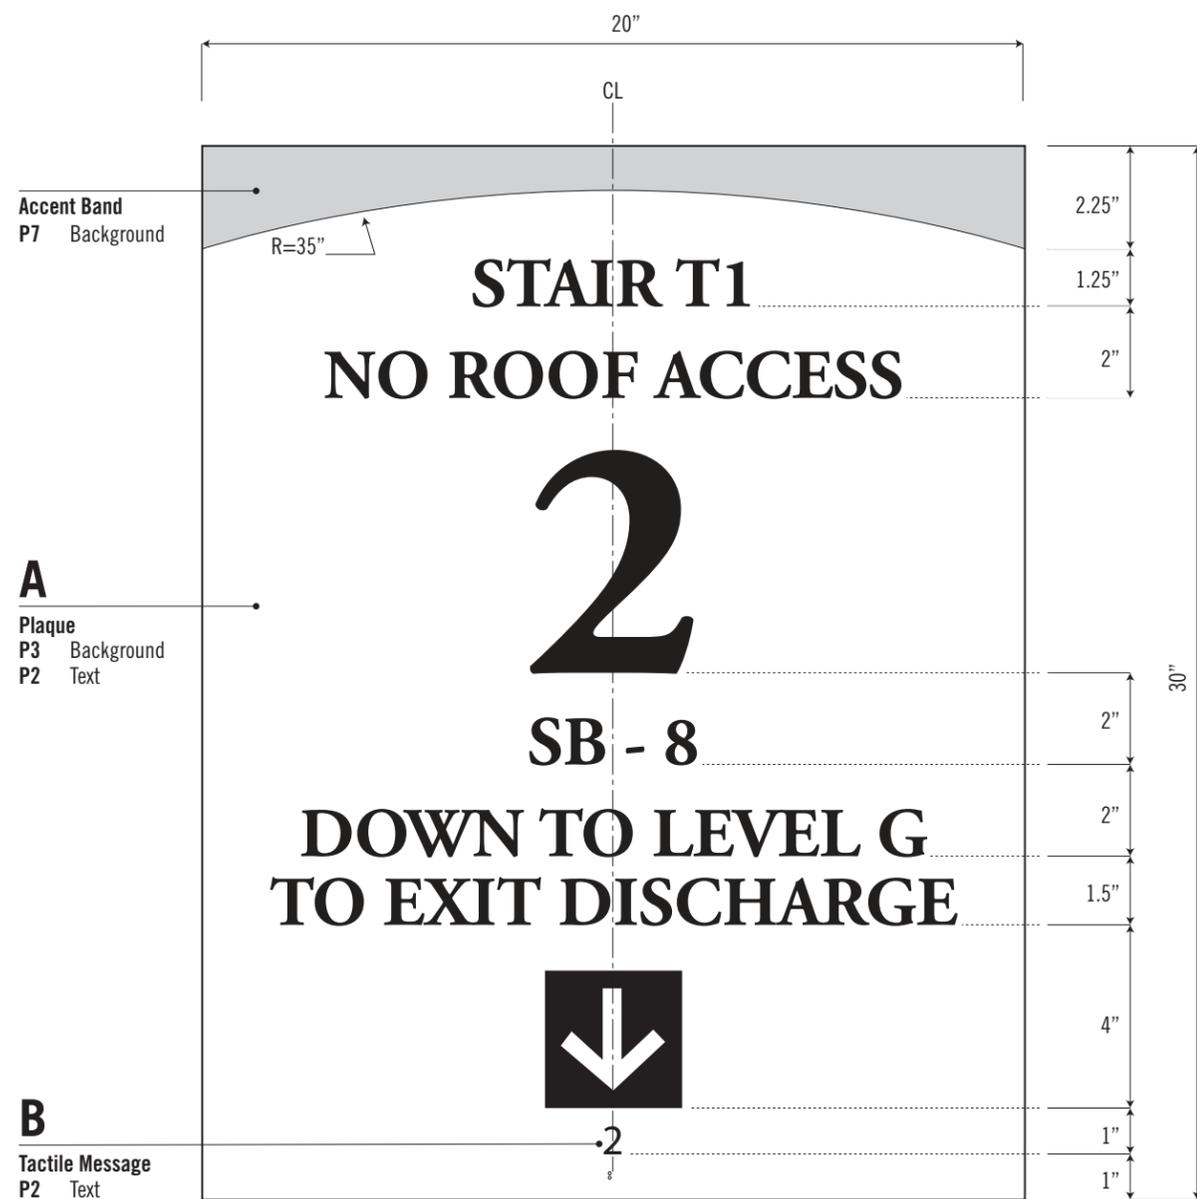


1 Elevation / 3" = 1'-0"

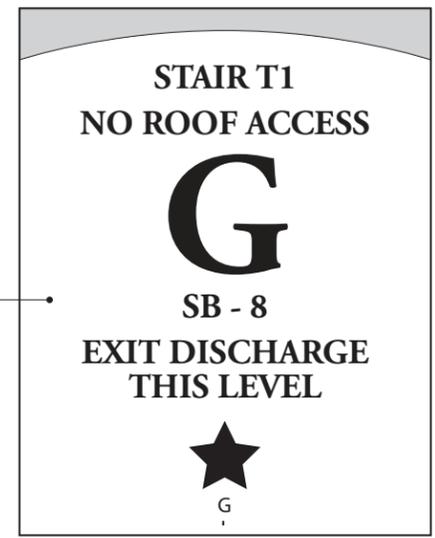

A
Plaque

3 Elevation / 1 1/2" = 1'-0"
Alternate Layout

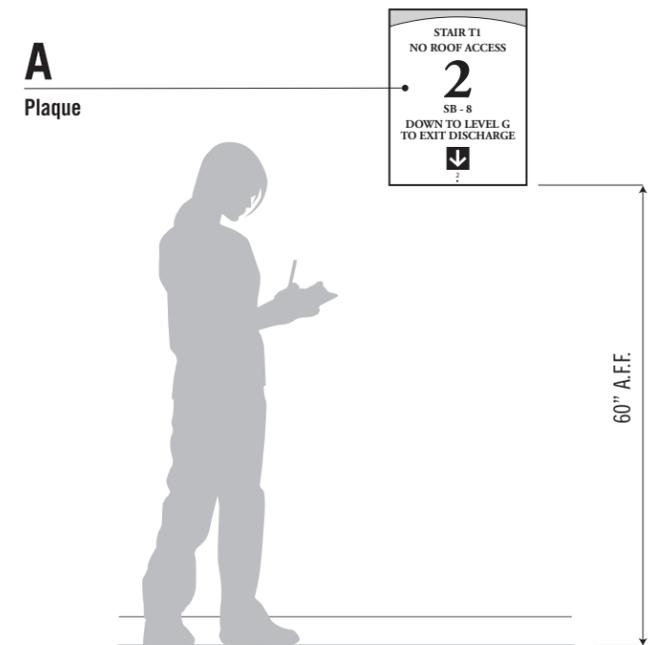

2 Elevation / 1/2" = 1'-0"

A Plaque:
1/8" Thick Acrylic, cut to size. Polish returns smooth & clear. Apply full bleed digital print to second surface.

Typography:
Adobe Garamond Pro Bold, 1" Cap Height (Based on "E"). Interline and intergroup spacing as indicated. Use 5" Cap Height for the Level indicator.

B Tactile Message:
Rout raised text from 1/32" Gravo-Tac, Matte finish, adhesive backed, single-ply sheet & surface mount to Panel.

Grade 2 Braille:
Front surface applied raster bead style, applied per manufacturer's specifications. Height, kerning & leading per requirements of the Standards for Accessible Design 2010.

Typography:
MetaPlus Caps Bold, 5/8" Cap Height (Based on "1").

Installation:
Concealed 3M VHB tape & silicone mount flush to wall. Locate on wall inside stair where sign is visible when door is in the open and closed positions, @ 60" to base of Tactile Character from finished floor.

Mark	Description	Date



Sign Type B
 Large "Specialty" Donor Info Plaque, Typ.
 18"Hx24"W
 Clear glass w/bezzel edges, digitally printed photo,
 and charcoal gray copy



Sign Type B.1
 Large Room/Area Donor Info Plaque, Typ.
 11"Hx14"W
 Clear glass w/bezzel edges and charcoal gray copy




Sign Type B.2
 Large Room/Area Donor Info Plaque, Typ.
 11"Hx8 1/2"W
 Clear glass w/bezzel edges and charcoal gray copy



Sign Type C
 Comprehensive Donor Listing Plaque, Typ.
 11"Hx14"W
 Clear glass w/bezzel edges and charcoal gray copy

DONOR SIGNAGE

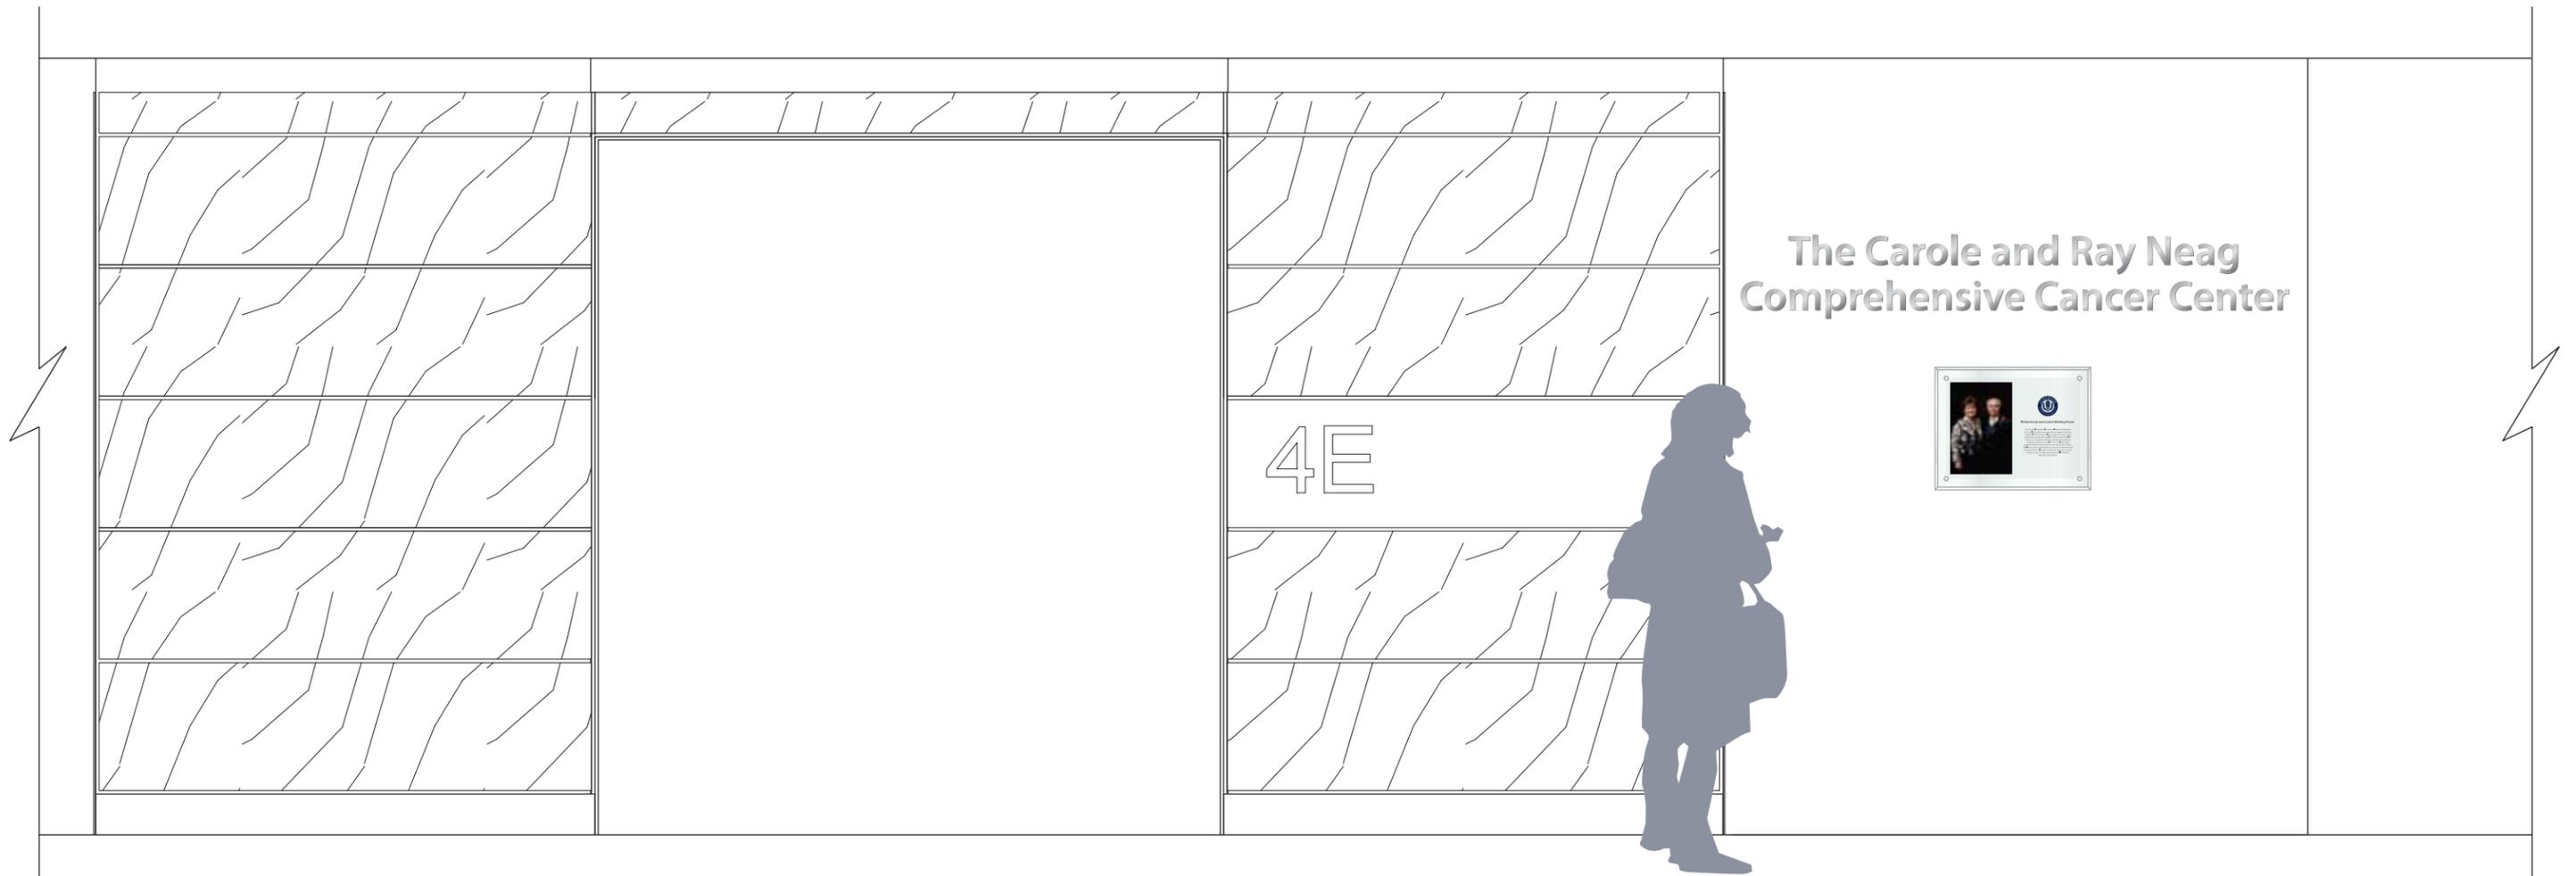


Sign Type A
Large Donor Letters, Typ.
4 3/16"H x 1/2" Thick
Aluminum w/satin brushed finish

Shown with Sign Type B plaque - horizontal layout
*Details on page 3.0

DONOR SIGNAGE

The Richard and Jane Lublin Waiting Room

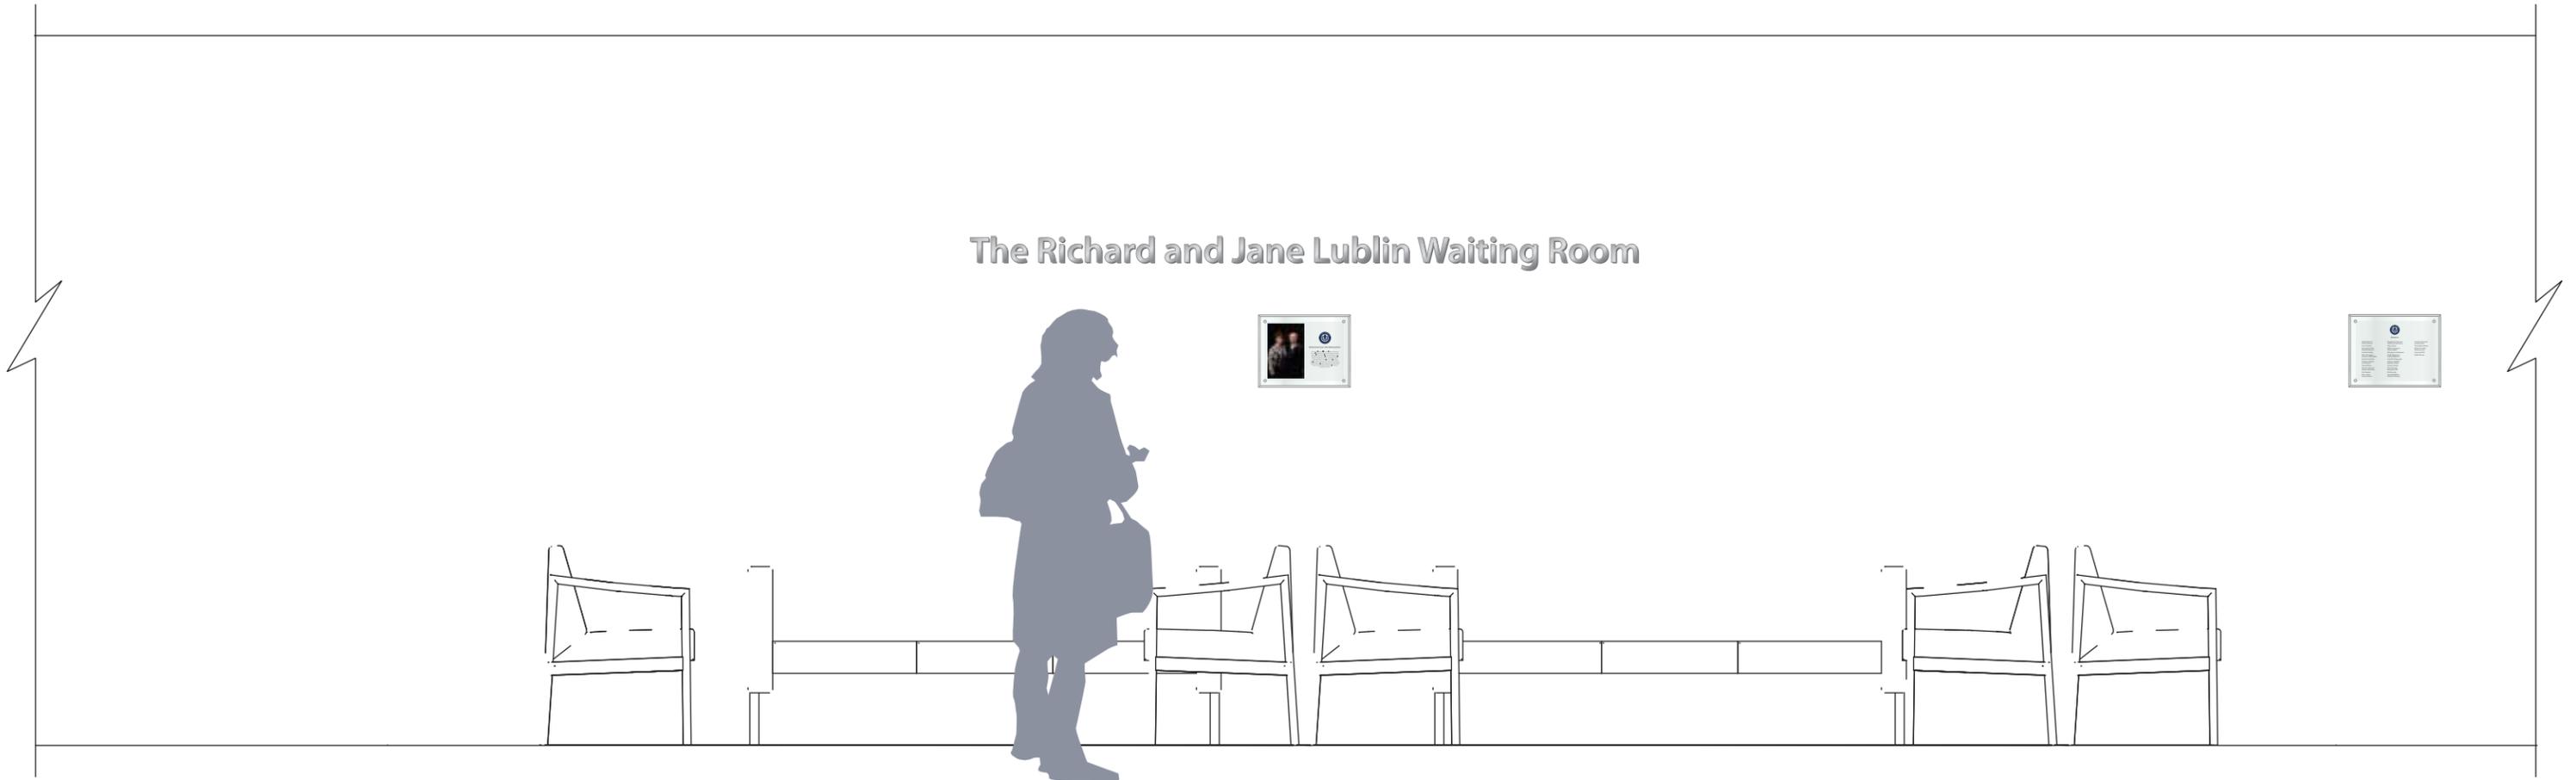

Sign Type A1
Small Donor Letters, Typ.
3 3/4"H x 1/2" Thick
Aluminum w/satin brushed finish

DONOR SIGNAGE



Sign Type B
Large "Specialty" Donor Info Plaque, Typ.
18"Hx24"W
Clear glass w/bezzeld edges, digitally printed photo,
and charcoal gray copy



Sign Type B.1
Large Room/Area Donor Info Plaque, Typ.
11"Hx14"W
Clear glass w/bezzeld edges and charcoal gray copy




Sign Type B.2
Large Room/Area Donor Info Plaque, Typ.
11"Hx8 1/2"W
Clear glass w/bezzeld edges and charcoal gray copy



Sign Type C
Comprehensive Donor Listing Plaque, Typ.
11"Hx14"W
Clear glass w/bezzeld edges and charcoal gray copy

DONOR SIGNAGE

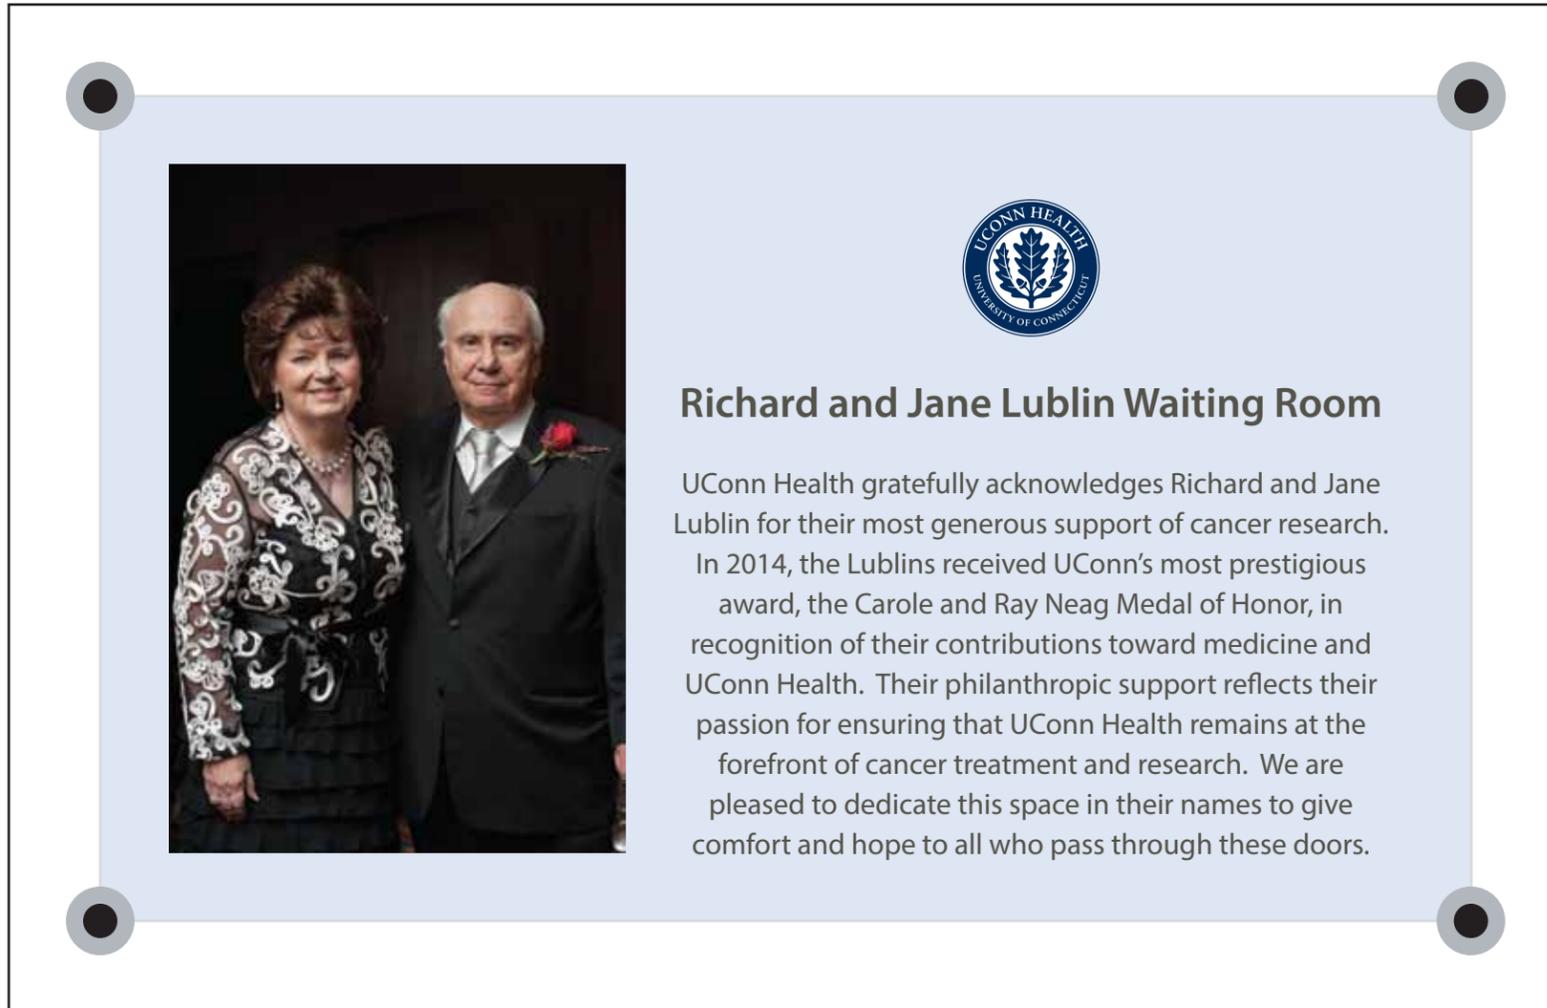

Sign Type B1, Large Room / Area Donor

GLASS
11" tall x 17" wide x 1/4" thick clear tempered glass (greenish tint at edges); standard pencil edge; four 3/8" diameter mounting holes

GRAPHICS
subsurface print

MOUNTING HARDWARE
3/4" diameter x 5/16" deep cap
3/4" diameter x 3/4" deep barrel

1" edges of glass to centers of:
3/8" diameter hole &
3/4" diameter cap

wall anchors as req'd

1-1/2" UConn seal
PMS 289c blue, white fill

5/16" Myriad Pro SemiBold, 3M Nimbus Gray

7/32" Myriad Pro Regular, 3M Nimbus Gray
7/32" interline

rectangle
9" tall x 15" wide


rectangle PMS 649c	logo fill white	logo PMS 289c UConn Blue	text PMS Black 7c
--------------------------	--------------------	--------------------------------	-------------------------

Sign Type 12 Insert Holder - 11" x 17"
Revised 4/01/14

12/12A

NOTE:

Sign Contractor to provide printed inserts, additional blank inserts and insert layouts on disc to owner.

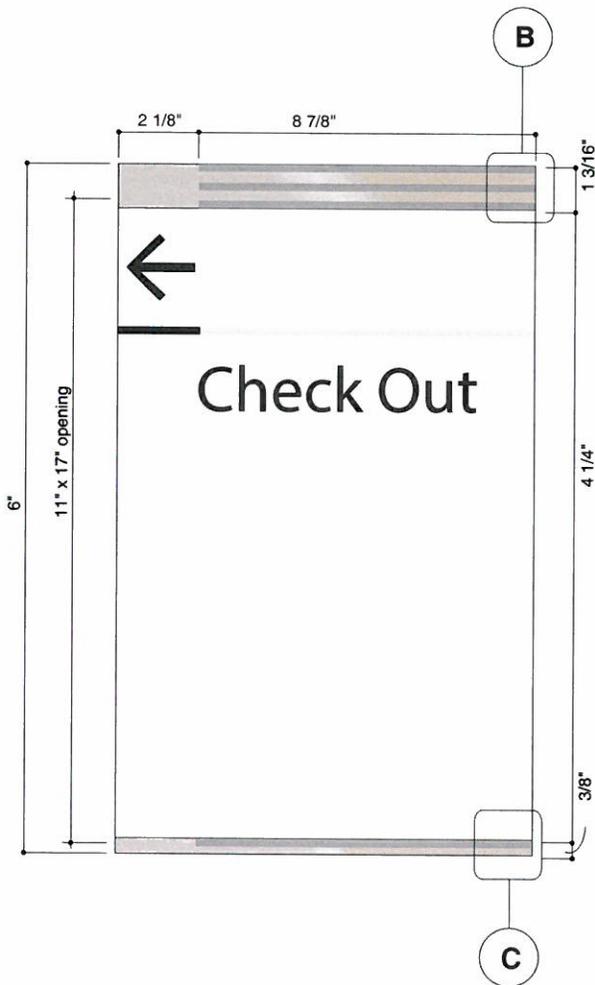


A Layout
Scale: 3" = 1' - 0"

TYPEFACE: Myriad Pro Regular

COLORS: **Frame** - Metallic Champagne


MATERIALS & FINISHES:
Acrylic insert holder with aluminum frame and b+w laser printed insert

INSERT PAPERS:
UV Ultra II vellum, 28 lb. Radiant White by Neenah Paper Company

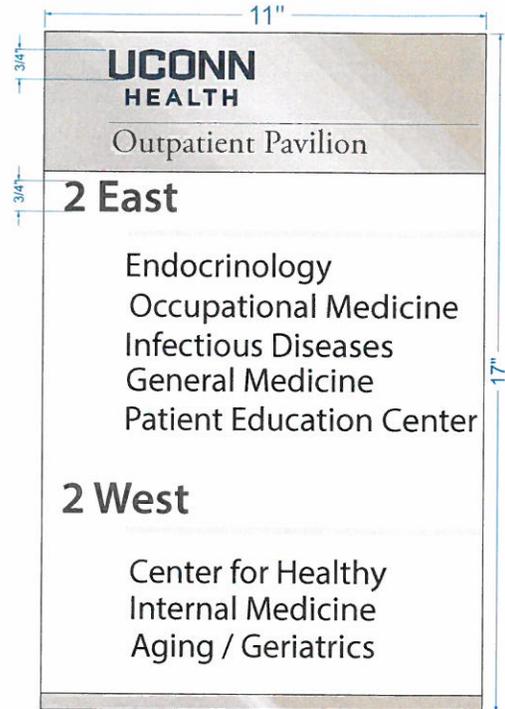

Sign Type 12A
Insert Holder - Directories
Insert: 11"Wx17"H
Acrylic window sign w/paper insert

Stripes 1/32" thick thermoformed compressed acrylic permanently bonded to aluminum channel painted finish - Metallic Champagne




B Detail
Scale: Full size



C Detail
Scale: Full size

Sign Type 12 Insert Holder - 11" x 17"
Revised 4/01/14

12.2

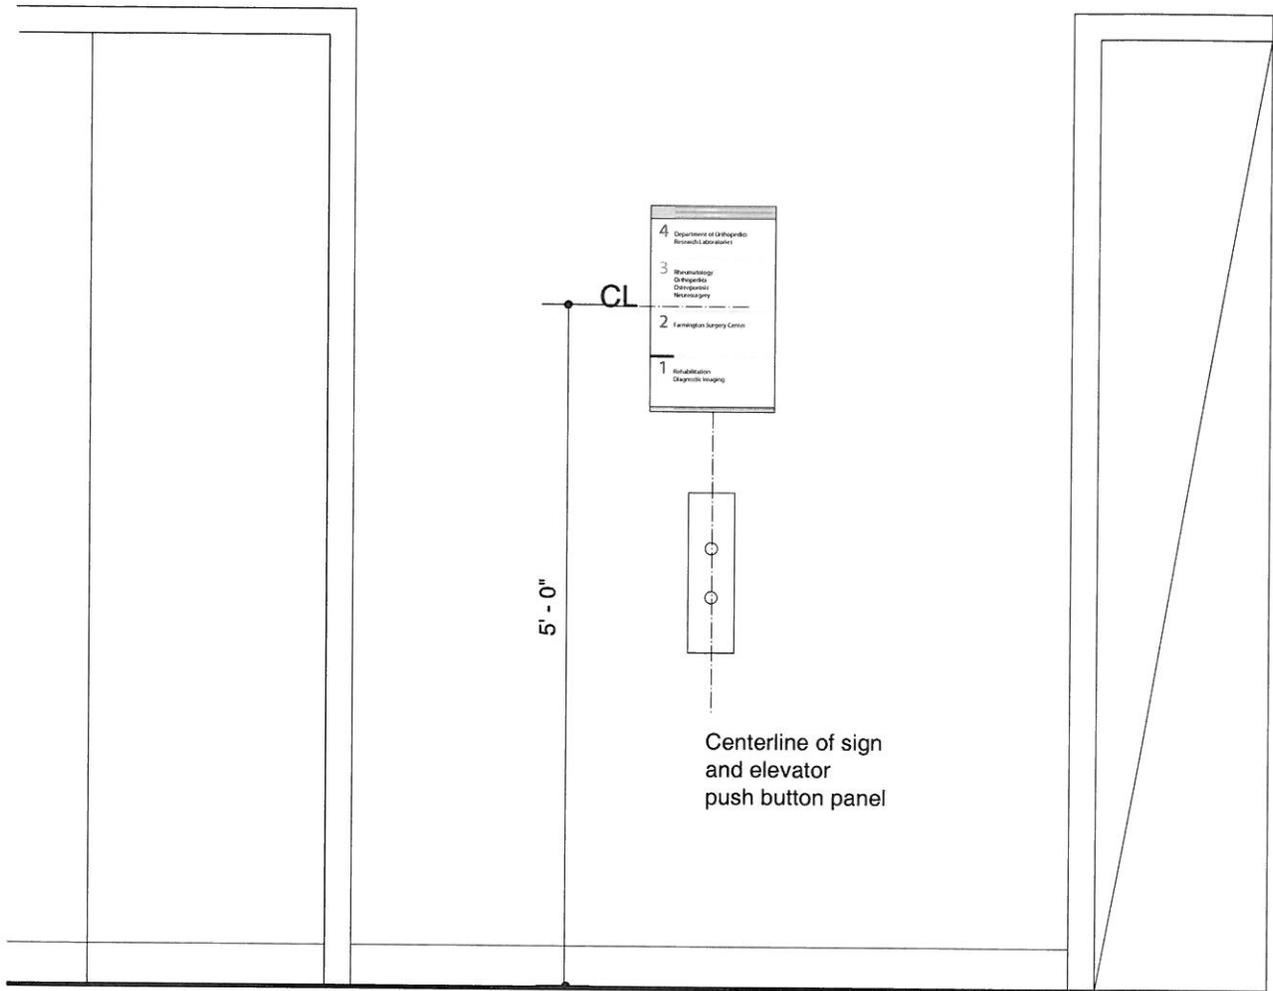



A Location Elevation - typical elevator
Scale: 3/4" = 1' - 0"

Sign Type 13 Check In
Revised 4/01/14

TYPEFACE: Myriad Pro Semibold Italic

COLORS: Metallic Charcoal

MATERIALS & FINISHES:
Fabricated aluminum letters,
painted.

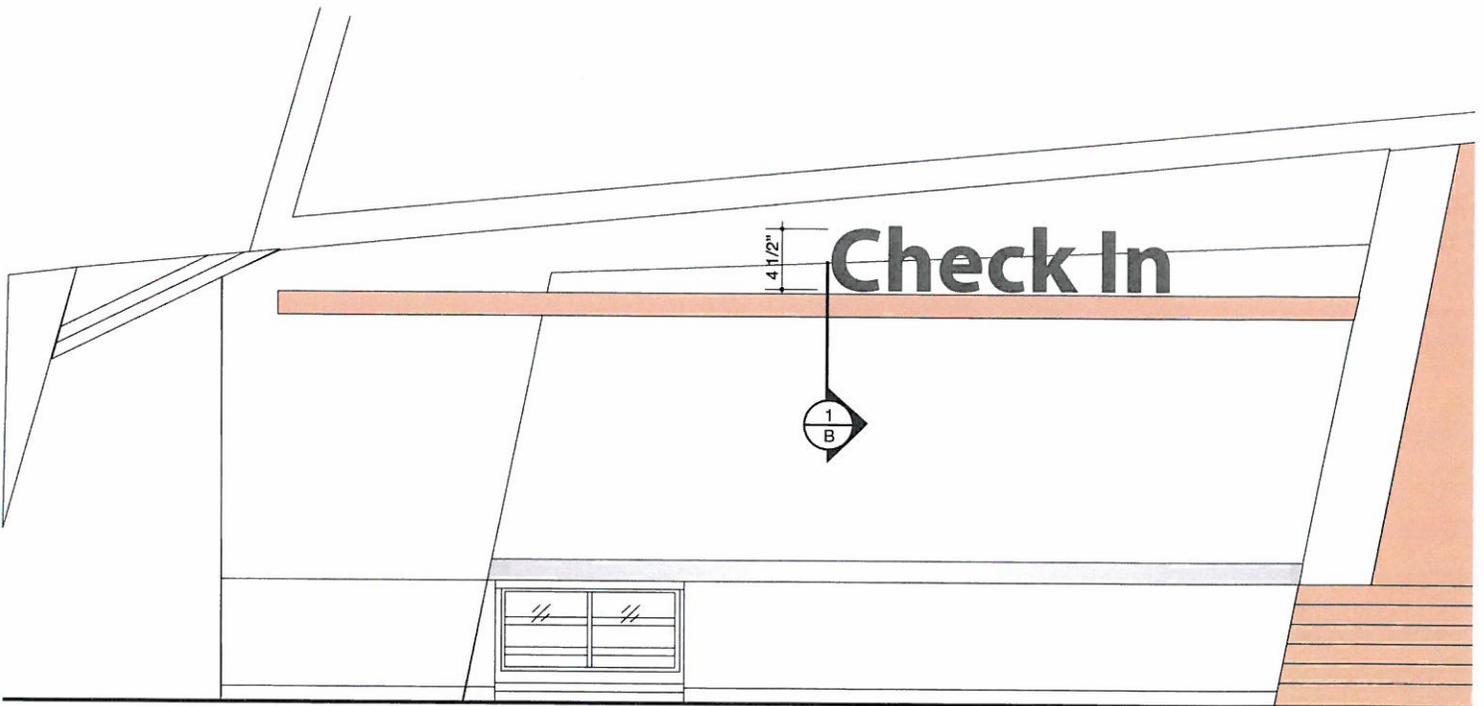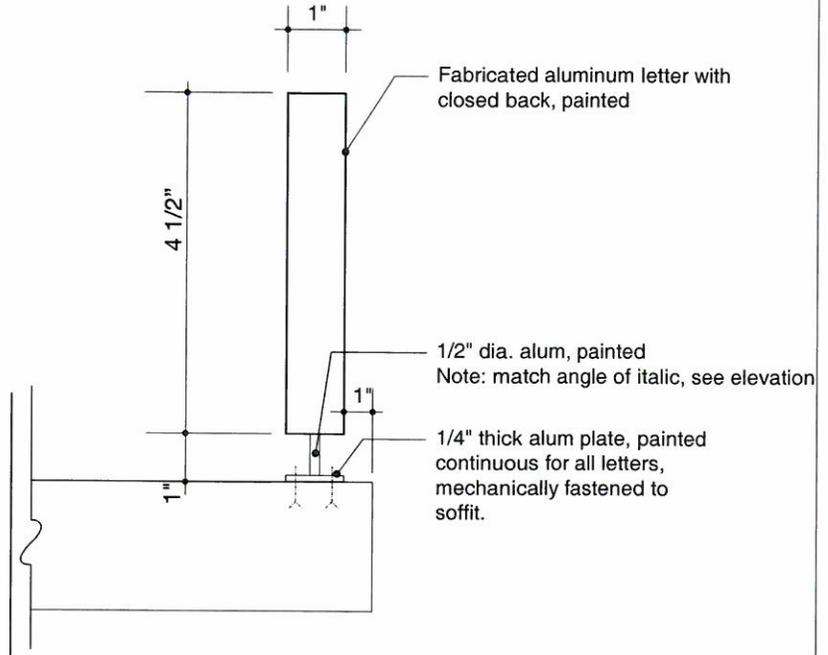


A Elevation
Scale: 3/8" = 1' - 0"

Sign Type 13A
Revised 4/01/14


Lobby Information

13

Exhibit C Drawings and Specifications

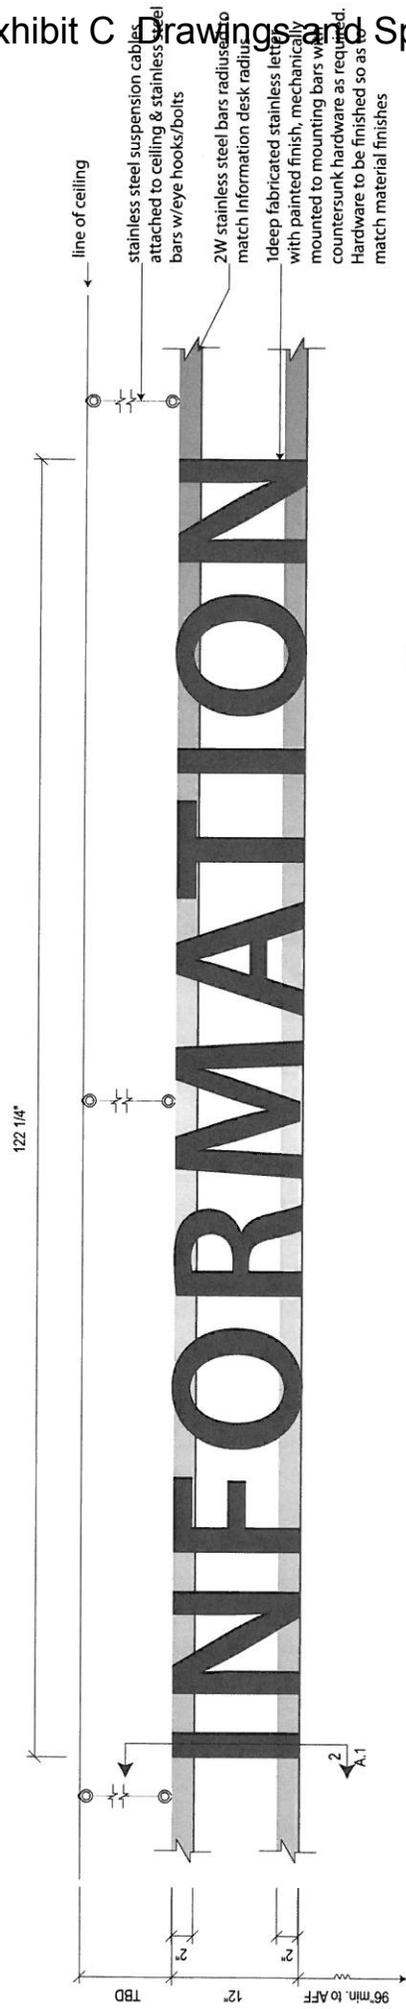


3 Detail
Scale: 1=1-0

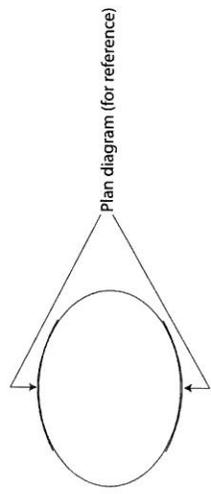

1 Elevation
Scale: 1/4=1-0

NOTES:
 - Field measurement of overall length of information desk required.
 - Field measurement of radius of information desk to be determine.
 - Minimum of 2 sets of letters on full sign circle around required, 3 preferred.
 - Ceiling conditions to be field verified for proper anchoring prior to fabrication.

2 Section
Scale: 3=1-0

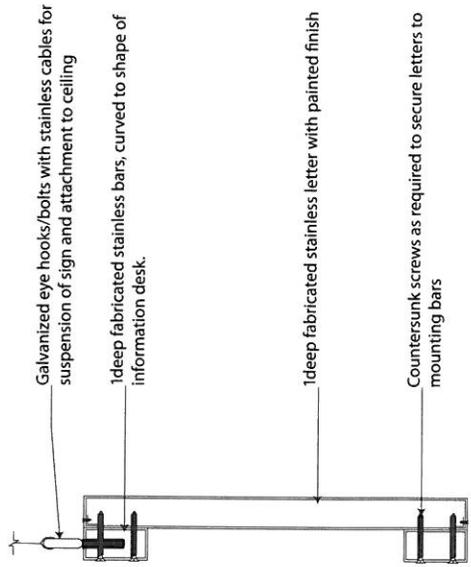


Sign Type 15 Recovery Sign
Revised 4/01/14


15

20 gauge spring steel
painted white - clips to standard
ceiling grid tee bars

Metal Ceiling Twist Loop
#107021 by K International,
Gurnee, IL (800-323-3289)
or approved equal.

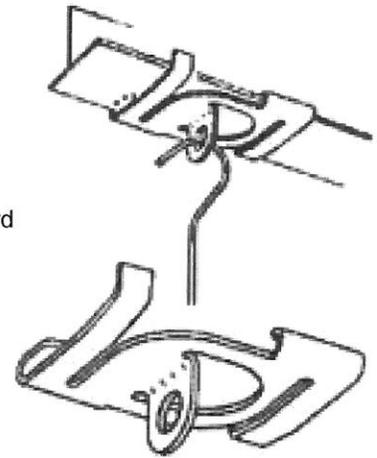

C Ceiling Clip Detail
No Scale

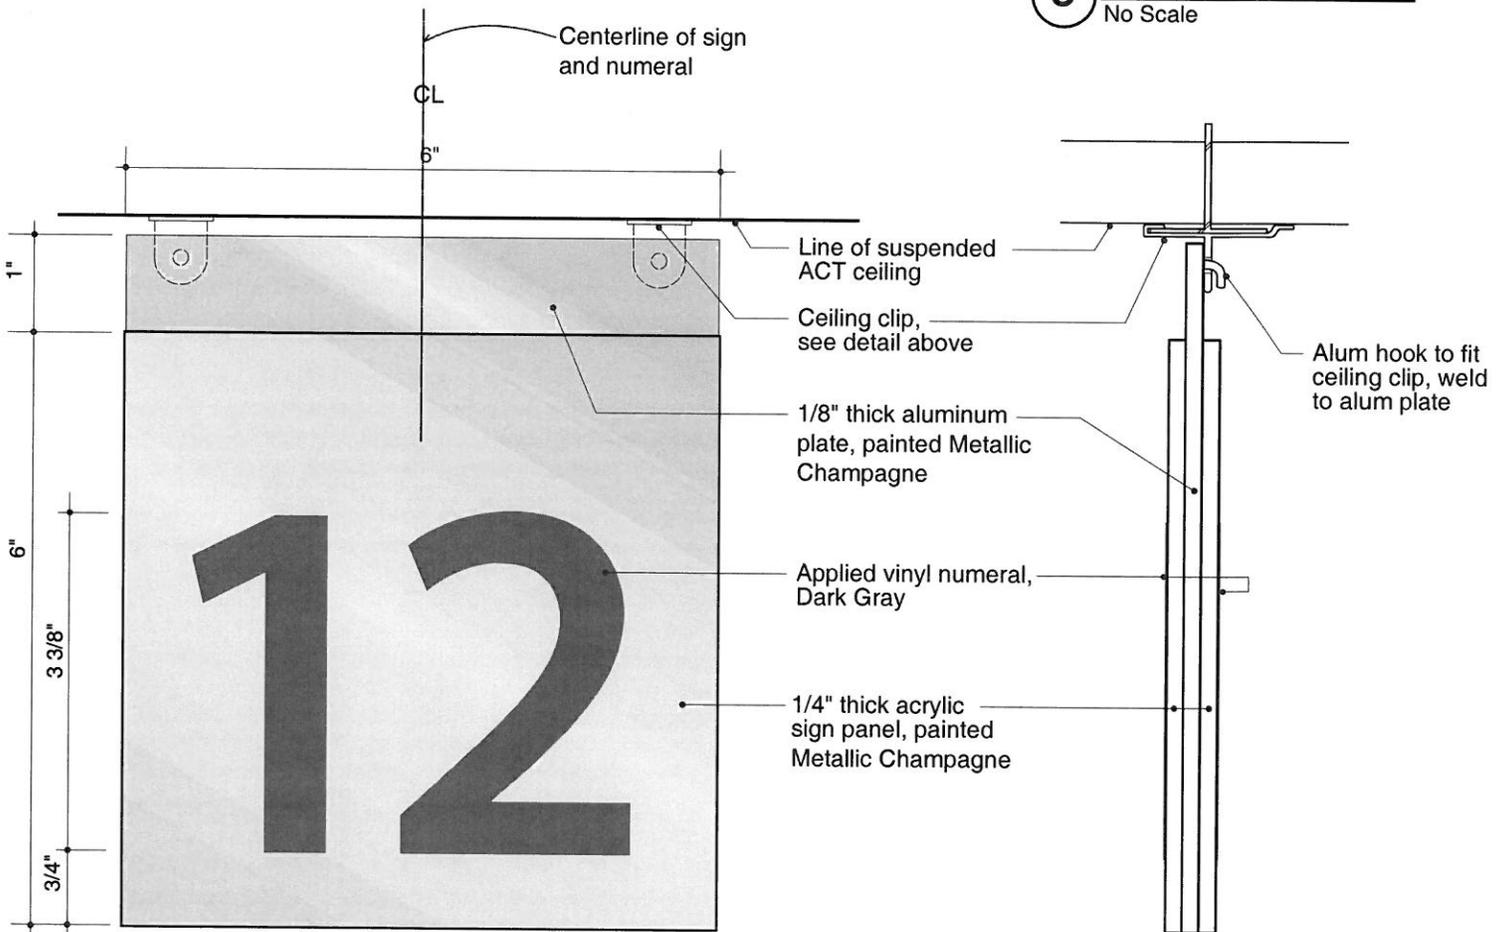

A Layout
Scale: Half full

B Section
Scale: Half full

Sign Type 15 Recovery Sign
Revised 4/01/14


15.1

TYPEFACE: Myriad Pro Semibold

COLORS: Sign Panel - Metallic Champagne
Text - Dark Gray

MATERIALS & FINISHES:
Acrylic sign panel painted with
applied vinyl graphics

Center sign panel over bed

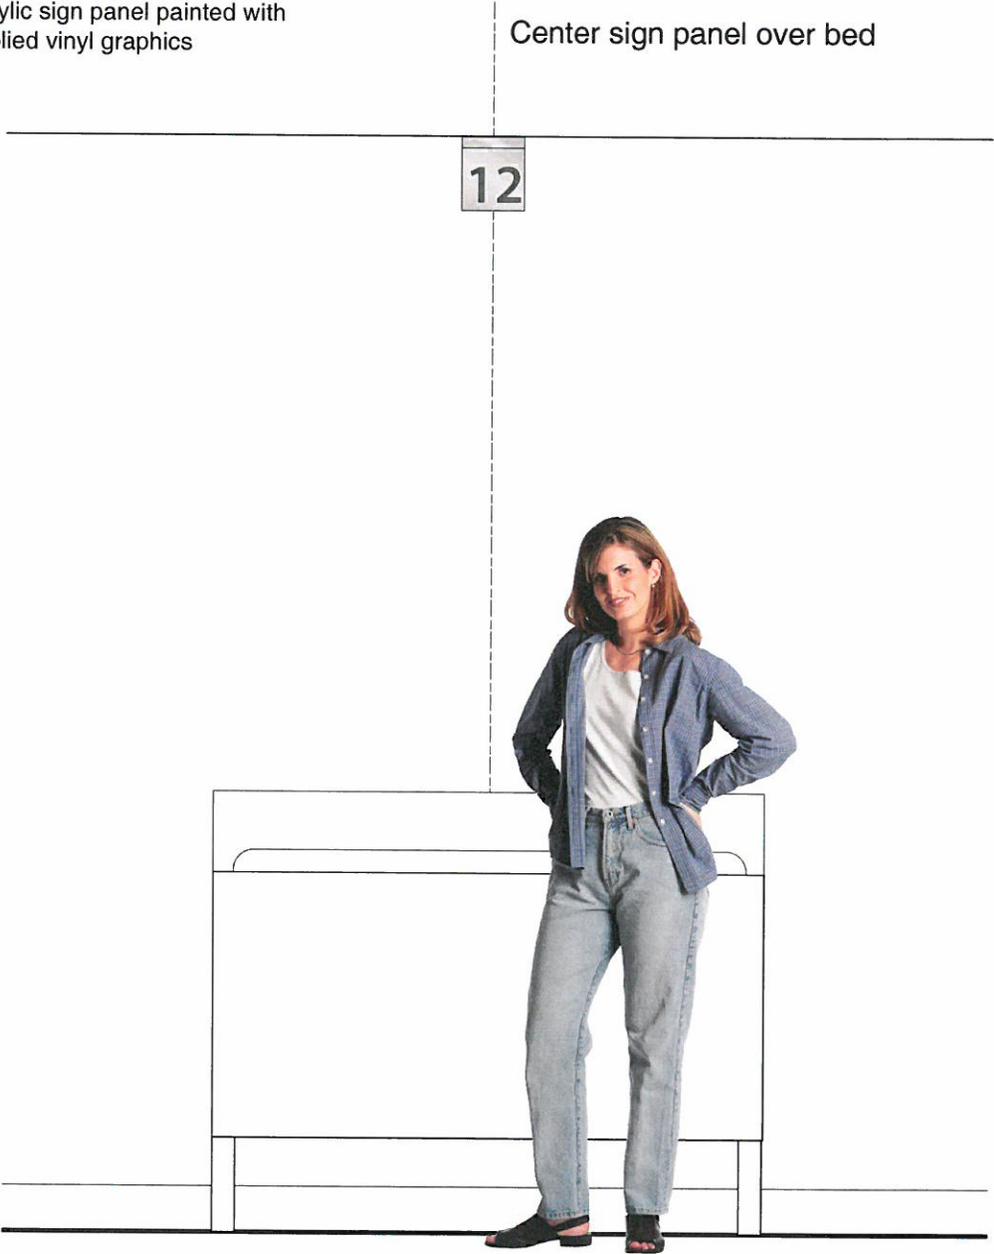


A Location Elevation - typical
Scale: 1/2" = 1' - 0"


TYPEFACE:
 Myriad Pro Semibold

COLORS:
Sign Panel - Metallic Champagne
Text + Symbols - Dark Gray

MATERIALS & FINISHES:
 Thermoformed compressed acrylic 1/4" thick
 painted finish, raised text, symbols, braille,
 & barlines. Room numbers raised, color to
 match background.
 Mounted to wall with VHB tape.

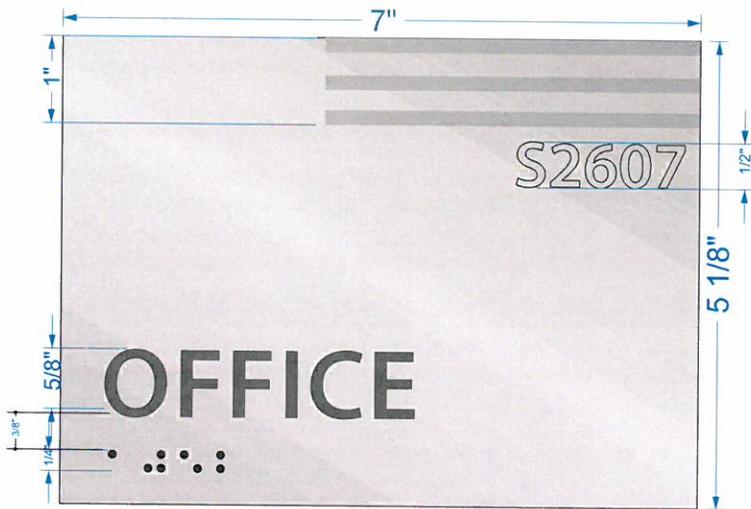


Raised Stripes to be 1/32"
 color to match background



A Layout - typical
 Scale: Half Full

Sign Type 16 Room Identification - tactile + braille
 Revised 4/01/14

16.1

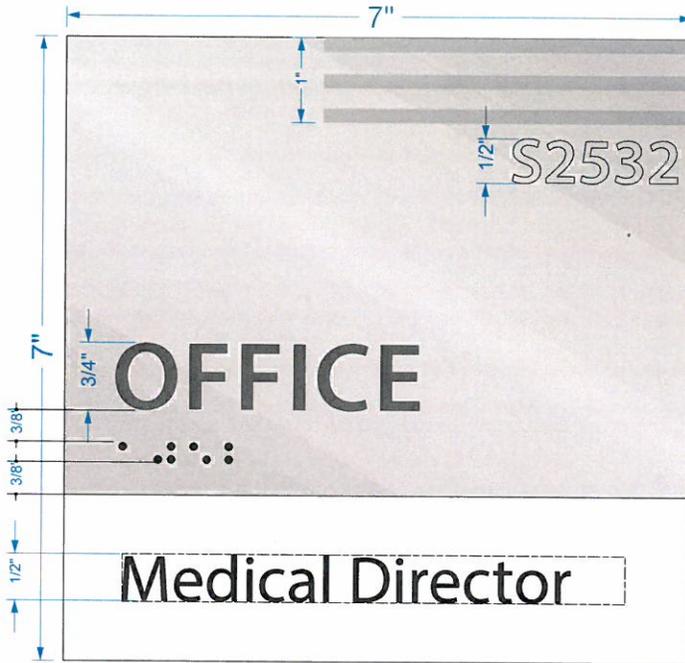


TYPEFACE:
 Myriad Pro Semibold

COLORS:
Sign Panel - Metallic Champagne
Text - Dark Gray

MATERIALS & FINISHES:
 Thermobonded compressed 1/4" acrylic backer with acrylic insert holder, painted finish with silkscreened graphics. Mounted to wall with VHB tape.

A Layouts - typical
 Scale: Half full

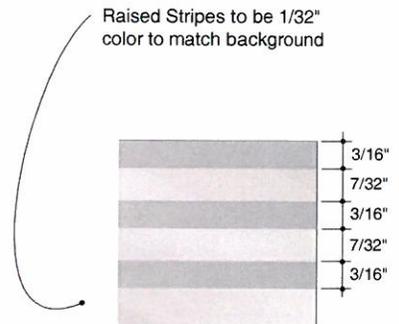


B Detail
 Scale: Full size


Sign Type 16.1 Insert Plaque
Revised 4/01/14

TYPEFACE:
Myriad Pro Regular

NOTE:
Sign Contractor to provide printed inserts,
additional blank inserts and insert layouts
on disc to owner.

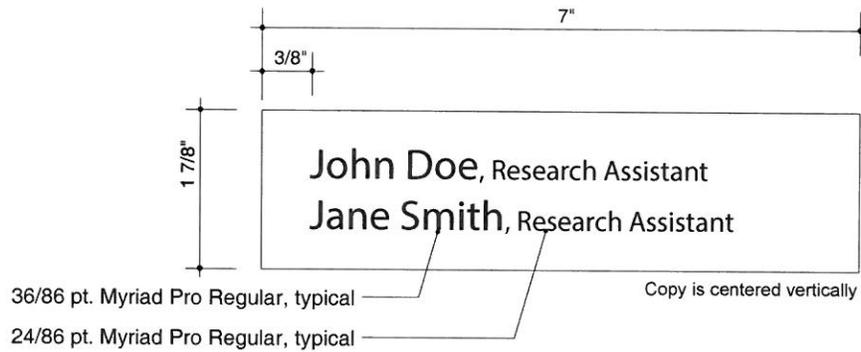

A Layout - 2 line typical
Scale: Half full


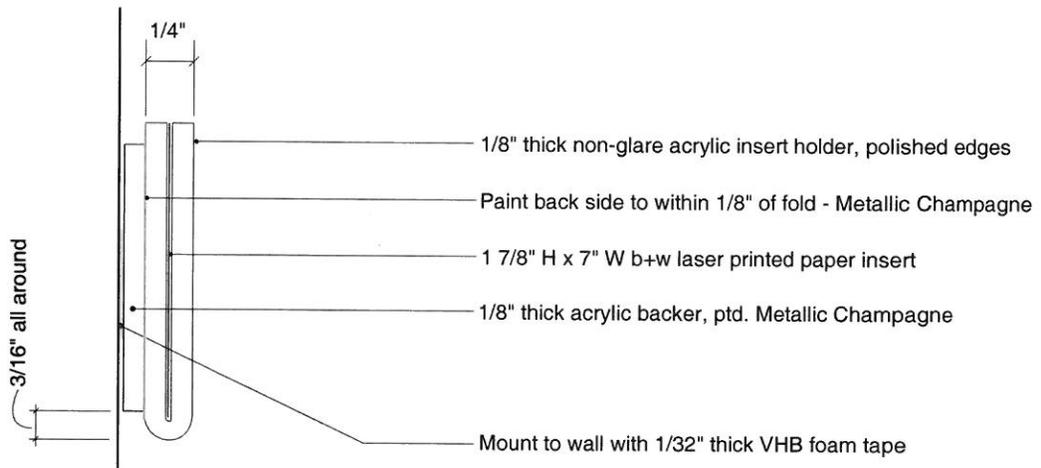


B Section
Scale: Full

TYPEFACE:
Myriad Pro Semibold


COLORS:
Sign Panel - Metallic Champagne
Text + Symbols - Dark Gray

MATERIALS & FINISHES:
Thermoformed compressed acrylic 1/4" thick painted finish, raised text, symbols, braille, & barlines. Room numbers raised, color to match background.
Mounted to wall with VHB tape.

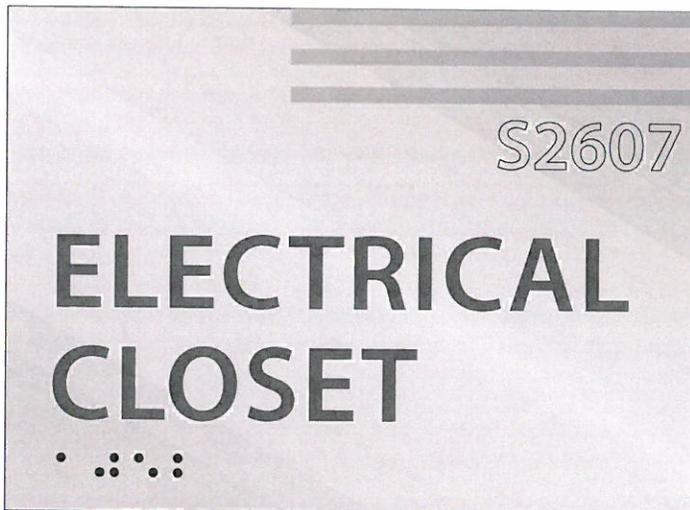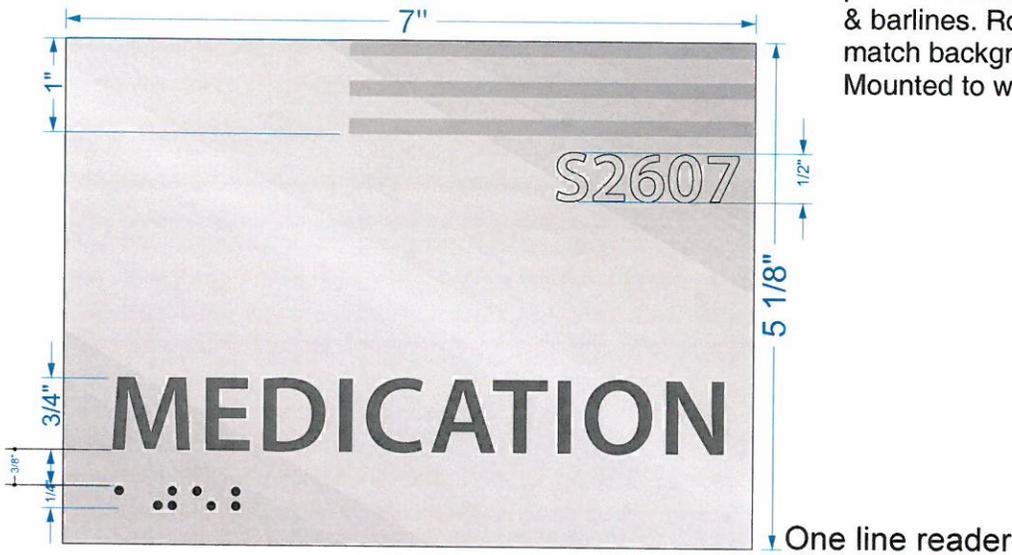

Two line reader
(85% line spacing)


Raised Stripes to be 1/32" color to match background



A Layout - typical
Scale: Half Full

NOTES:

1. If sign cannot be mounted to latch side of door as shown, mount to hinge side of door, similar location.
2. At double door conditions, sign to be mounted to right side of doors.
3. If sign is mounted on glass, provide vinyl mask, same size and color for second surface of glass.

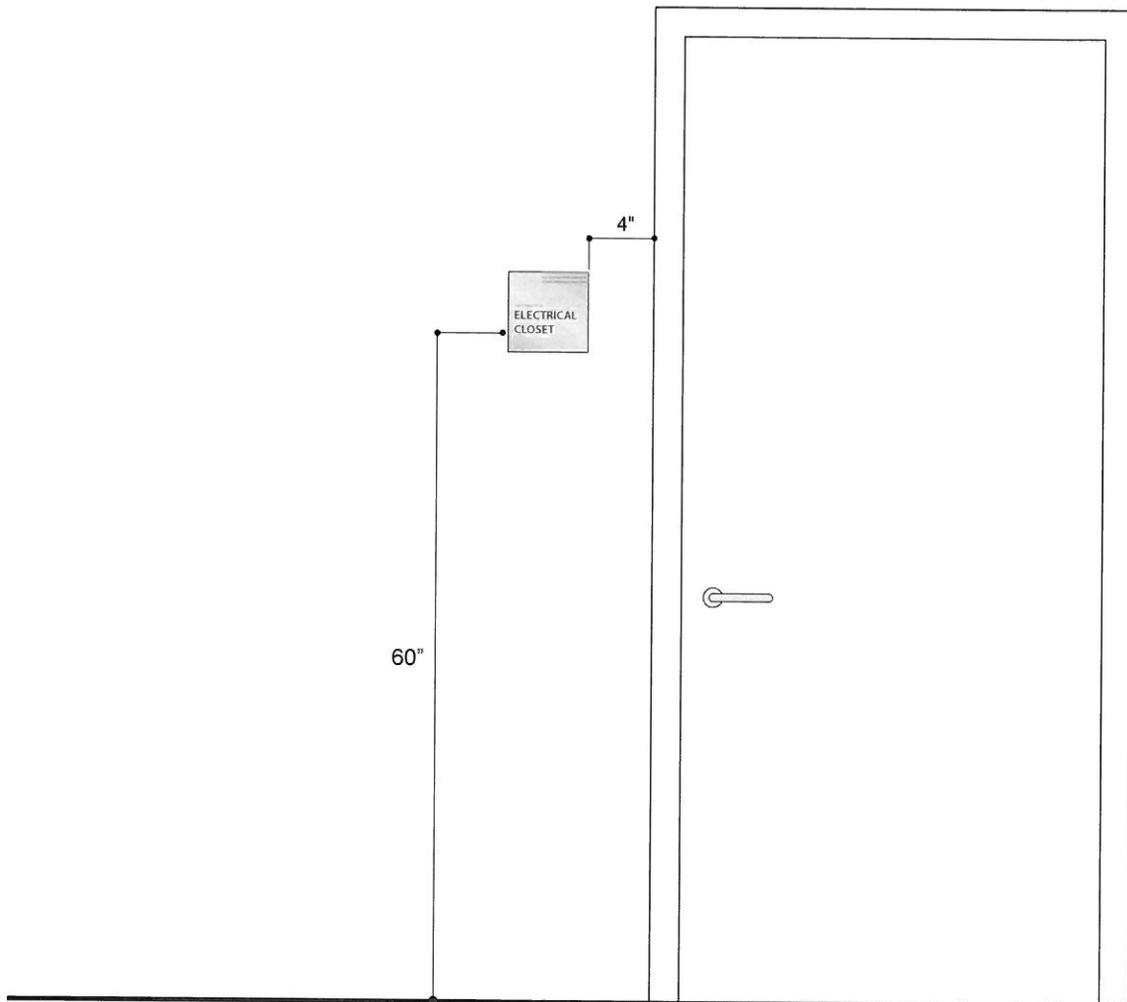


A Location Elevation - typical
Scale: 3/4" = 1' - 0"


TYPEFACE:
Myriad Pro Semibold

COLORS:
Sign Panel - Metallic Champagne
Text + Symbols - Dark Gray


MATERIALS & FINISHES:
Thermoformed compressed acrylic 1/4" thick
painted finish, raised text, symbols, braille,
& barlines. Room numbers raised, color to
match background.
Mounted to wall with VHB tape.

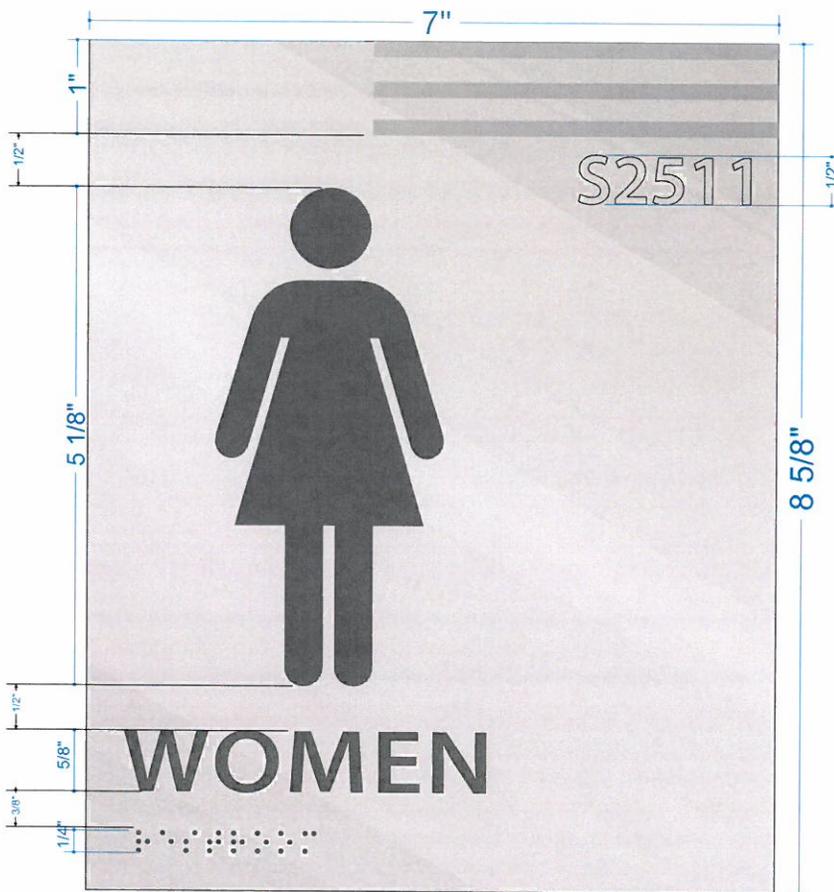

Raised Stripes to be 1/32" thick
color to match background




A Layout - typical
Scale: Half Full

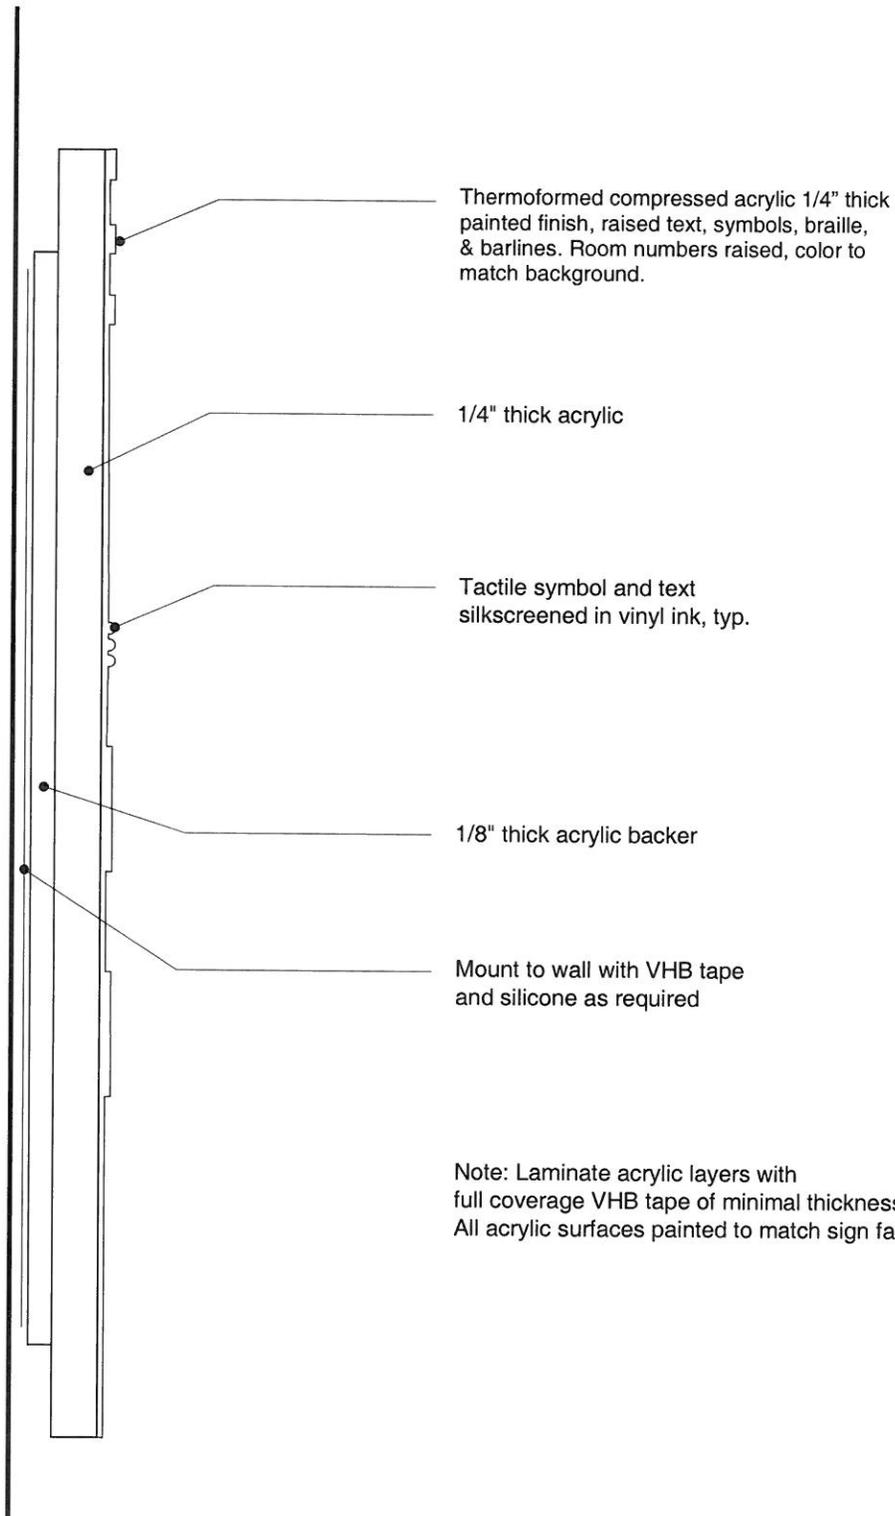

Note: Laminate acrylic layers with full coverage VHB tape of minimal thickness. All acrylic surfaces painted to match sign face.

A Section - typical
Scale: Full size

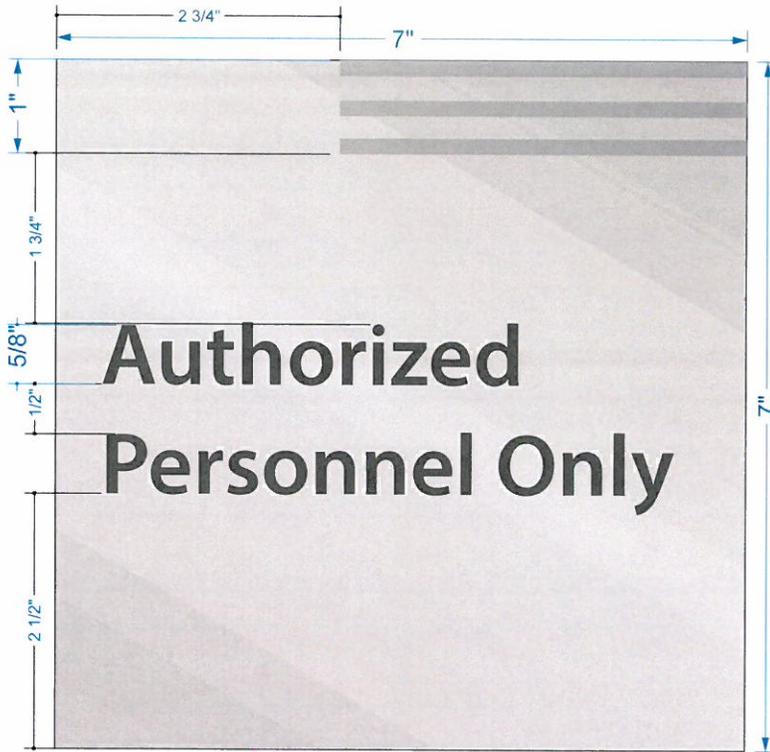


TYPEFACE:
Myriad Pro Semibold

COLORS:
Sign Panel - Metallic Champagne
Symbols and Text - Dark Gray

MATERIALS & FINISHES:
Acrylic sign panel, painted with vinyl ink silkscreened symbols and text, Mounted to wall with VHB tape.

A Layouts - typical
Scale: Half full

Raised Stripes to be 1/32" thick photo polymer component silkscreened in vinyl ink - Dark Gray permanently bonded to a 1/32" thick aluminum painted finish - Metallic Champagne




B Detail
Scale: Full size

TYPEFACE:
Myriad Pro Semibold

COLORS:
Sign Panel - Metallic Champagne
Symbols and Text - Dark Gray

MATERIALS & FINISHES:
Acrylic sign panel, painted with
vinyl ink silkscreened symbols and text,
Mounted to wall with VHB tape.

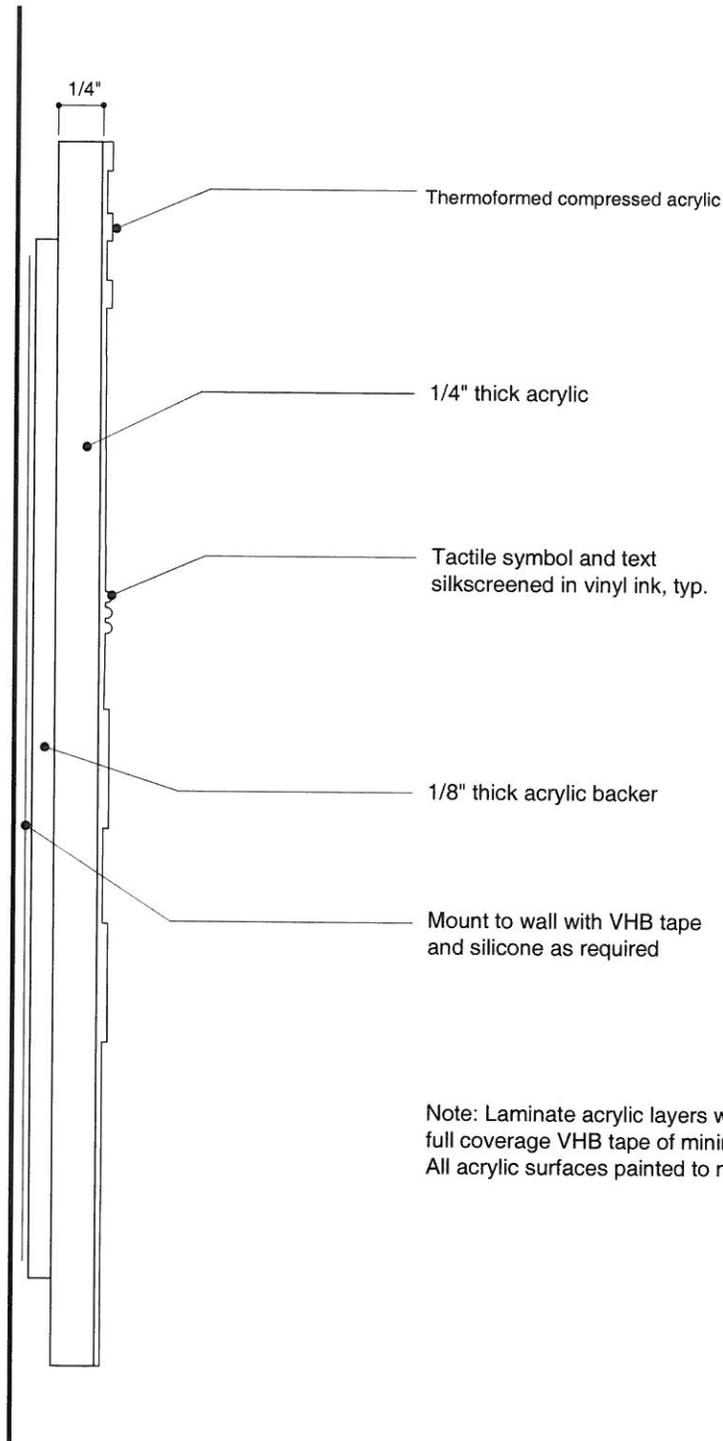

Note: Laminate acrylic layers with full coverage VHB tape of minimal thickness. All acrylic surfaces painted to match sign face.

A Section - typical
Scale: Full size

TYPEFACE: Myriad Pro Semibold


COLORS: **Sign Panel** - Metallic Champagne
Text - Dark Gray

MATERIALS & FINISHES:


Thermoformed compressed 1/4" acrylic,
acrylic backer panel, painted finish,
Mounted to wall with VHB tape.



Raised Stripes to be 1/32"
color to match background



A Layouts - typical
Scale: Half full

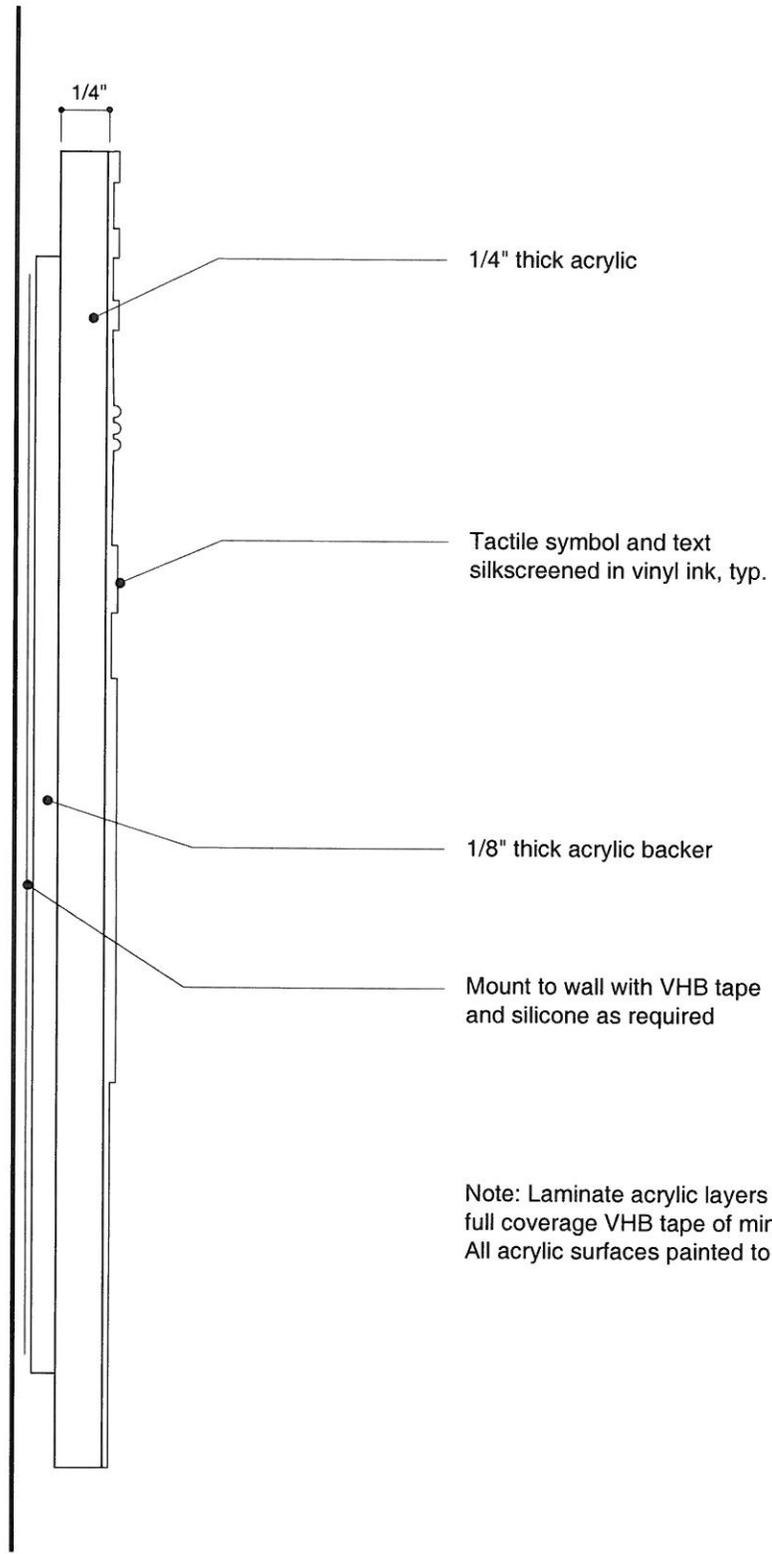

1/4" thick acrylic

Tactile symbol and text
silkscreened in vinyl ink, typ.

1/8" thick acrylic backer

Mount to wall with VHB tape
and silicone as required


Note: Laminate acrylic layers with
full coverage VHB tape of minimal thickness.
All acrylic surfaces painted to match sign face.

A Section - typical
Scale: Full size


TYPEFACE: Myriad Pro Semibold

COLORS: **Sign Panel** - Metallic Champagne
Text - Dark Gray

MATERIALS & FINISHES:
Thermoformed compressed 1/4" acrylic,
acrylic backer panel, painted finish,
Mounted to wall with VHB tape.

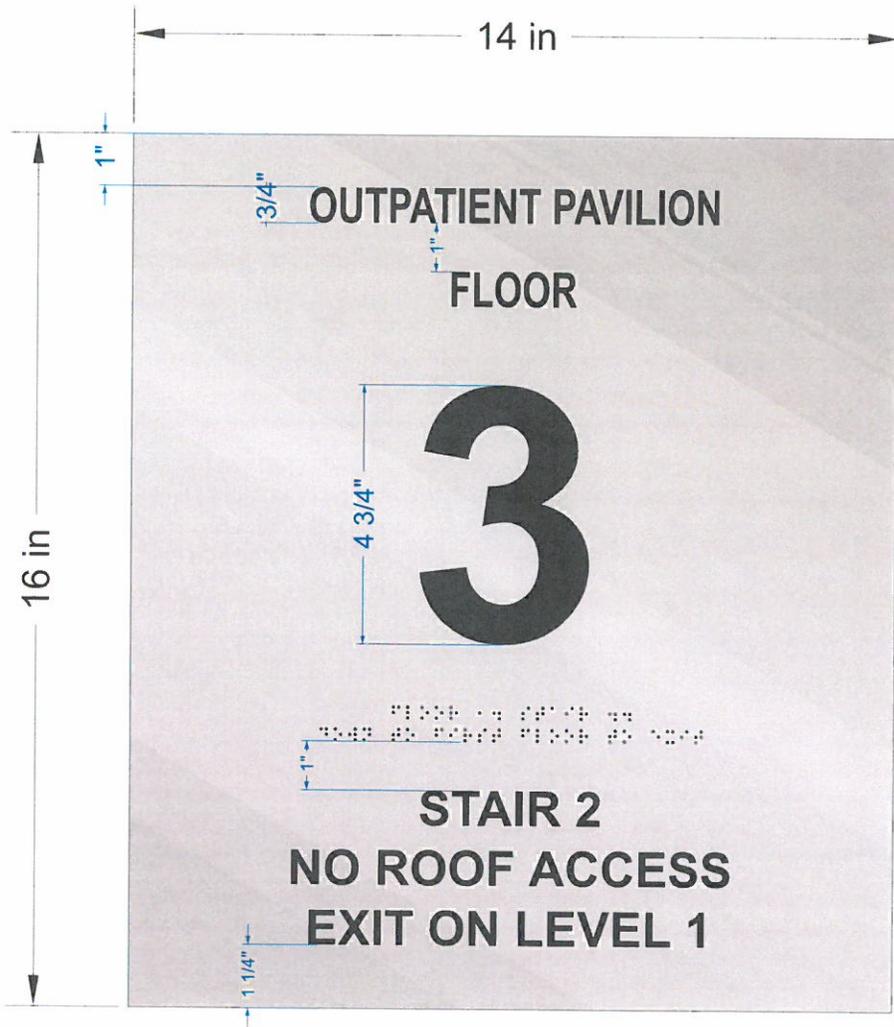


Raised Stripes to be 1/32" color to match background



A Layouts - typical
Scale: Half full


Typical

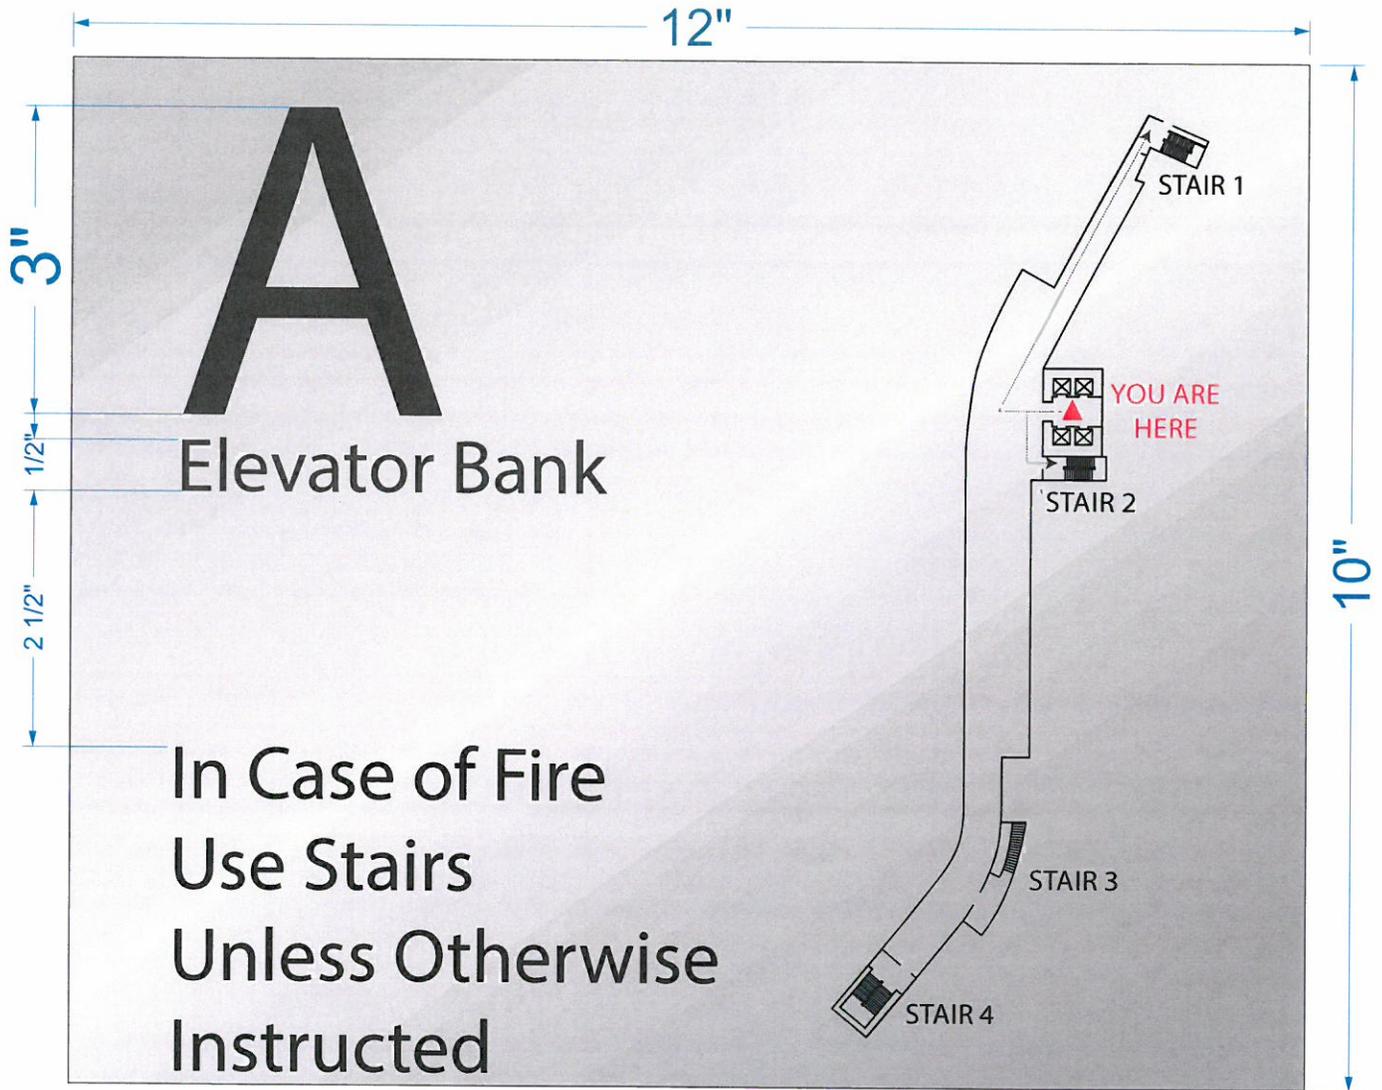


TYPEFACE:
Myriad Pro Semibold
Myriad Pro Regular

COLORS:
Sign Panel - Metallic Champagne
Text - Dark Gray & Red

Sign Type 20 - Desk Mounted Notice Holder

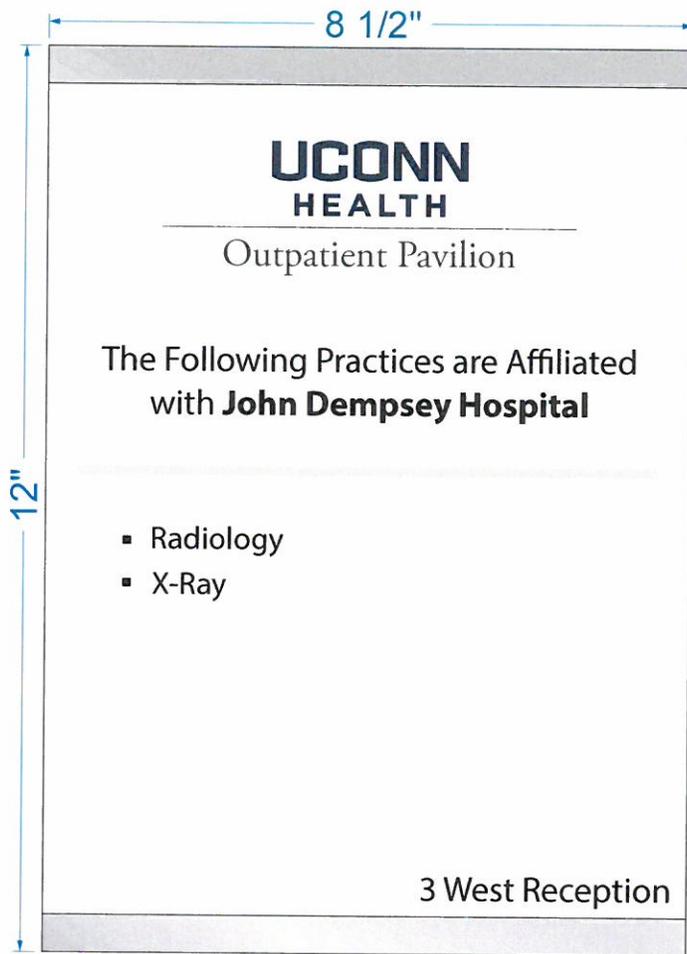

Front View

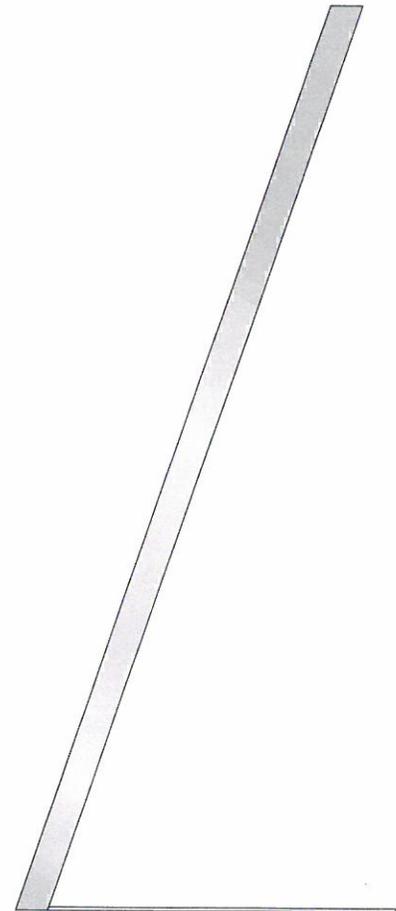

Side View

UCONN Renderings.cdr

Image is not to scale

I have verified the accuracy of all graphics shown with respect to sizes and content. The specifications are correct and represent our order requirements exactly. I authorize release to production according to this approved submittal.

APPROVED BY: _____

DATE: _____

UConn HEALTH

Signage Package Type 2

Outpatient Pavilion and Musculoskeletal Institute

Sign Detail Drawings

Revised 4/01/14

Note:

All interior paint finishes: eggshell, unless otherwise noted in the drawings.

Colors

Metallic Charcoal	to match Matthews Paint Co. MP18149
Metallic Champagne	to match Matthews Paint Co. MP20060
White	to match Scotchcal 220-20, Matte White
Dark Gray	to match Scotchcal 220-101, Nimbus Gray

Insert Paper

UV Ultra II vellum, 28 lb. Radiant White by Neenah Paper Company

Revised 4/01/14

Adobe Garamond

ABCDEFGHIJKLMN

OPQRSTUVWXYZ

abcdefghijklmnopq

rstuvwxyz

1234567890

Revised 4/01/14

Myriad Pro Semibold

**ABCDEFGHIJKLM
NOPQRSTUVWXYZ
abcdefghijklmno
pqrstuvwxyz
1234567890**

Myriad Pro Regular

ABCDEFGHIJKLM
NOPQRSTUVWXYZ
abcdefghijklmno
pqrstuvwxyz
1234567890

Revised 4/01/14


Symbols



Men ♂ D.O.T.



Women ♀ D.O.T.

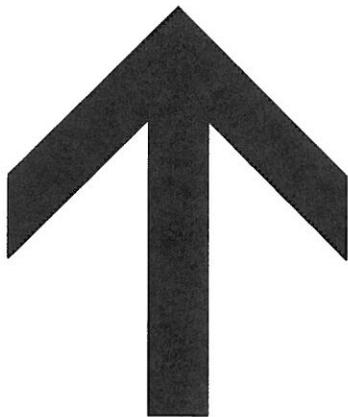

Arrow



Unisex - D.O.T.

Sign Type 1A Lettering
Revised 4/01/14


1

TYPEFACE: Myriad Pro Semibold


COLORS: Metallic Champagne

MATERIALS & FINISHES:

Floor Number: 1" thick fabricated aluminum, painted stud-mounted to existing wall with adhesive as required

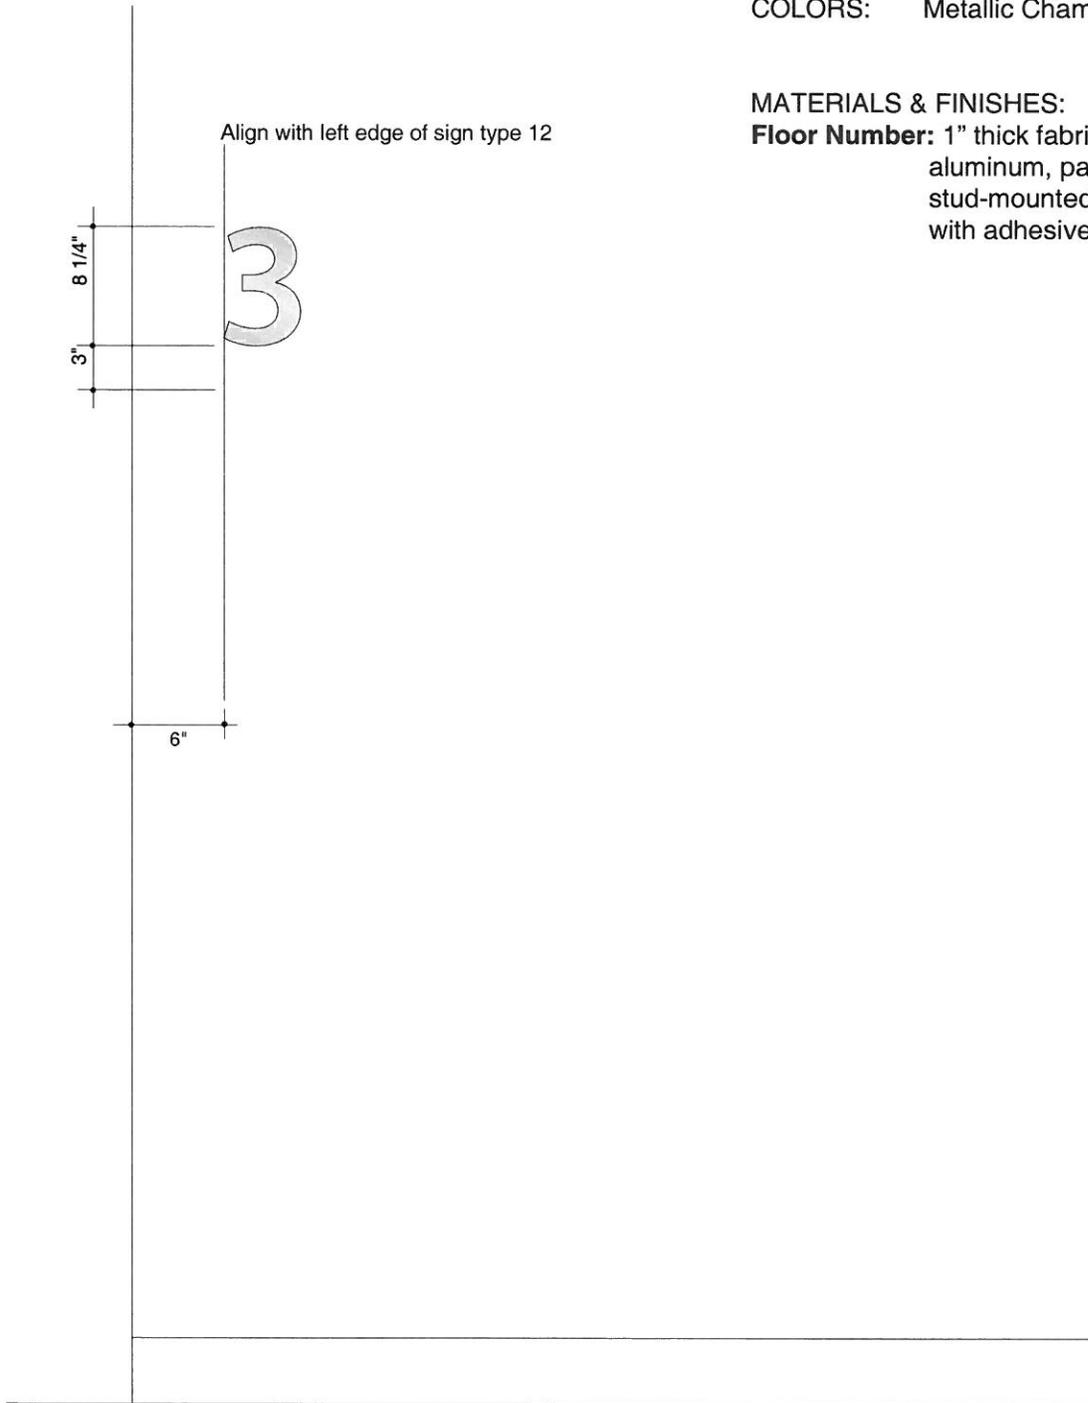

A Location Elevation - typical
Scale: 1" = 1' - 0"

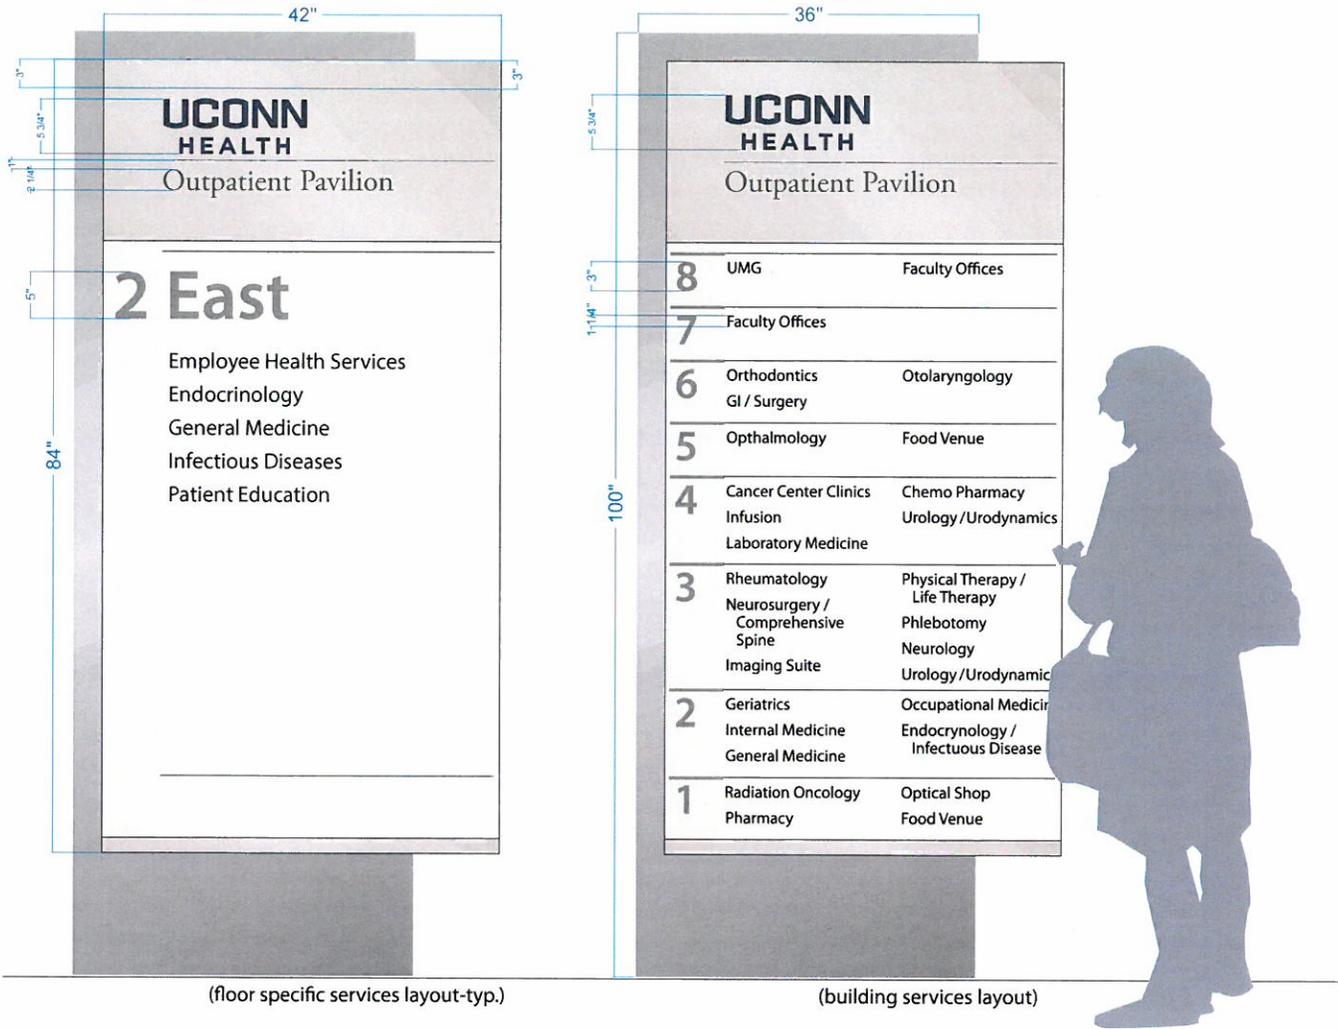

HEADER TYPEFACE:
UCHC Logo,
Adobe Garamond

ARTWORK:
For digital print portion
provided on disc by Designer
(Adobe Illustrator 10)


COLORS:
Header Text - Dark Gray
Frame - Metallic Champagne
Digital Print - Allow for 3 colors

MATERIALS & FINISHES:
Frame 1/8" aluminum, painted,
with silk-screened header text.
Large format digital print insert.
Face Panel 1/4" thick
tempered glass

Sign Type 8
Revised 4/01/14

Overhead Directional

8A

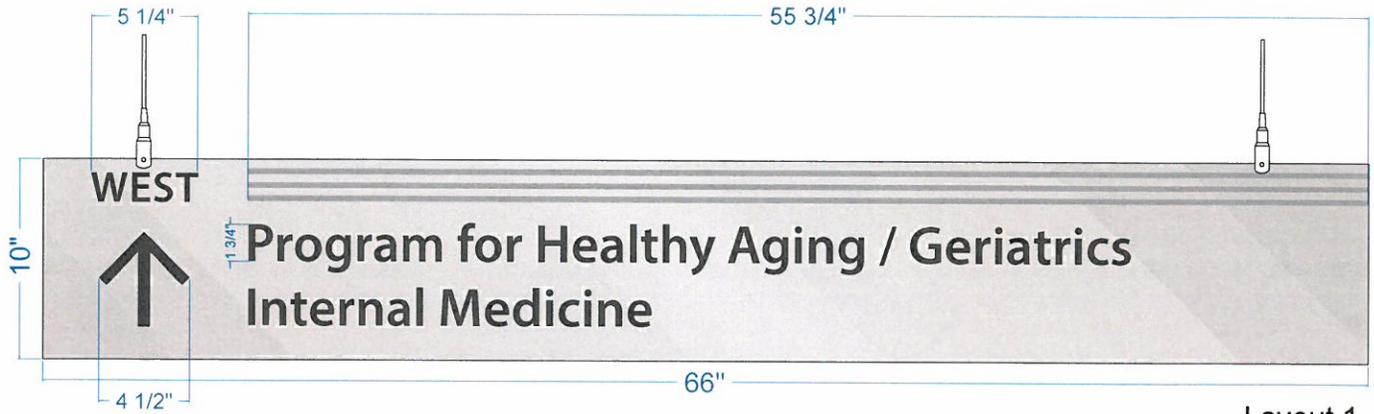

Layout 1

Sign Type 8A
Overhead Directional - Suspended
66Wx10H
Aluminum or Acrylic w/painted finish & applied graphics




Layout 2

Sign Type 8A - Version 2
Overhead Directional - Suspended
66Wx10H
Aluminum or Acrylic w/painted finish & applied graphics



Layouts

Scale: 1" = 1' - 0"

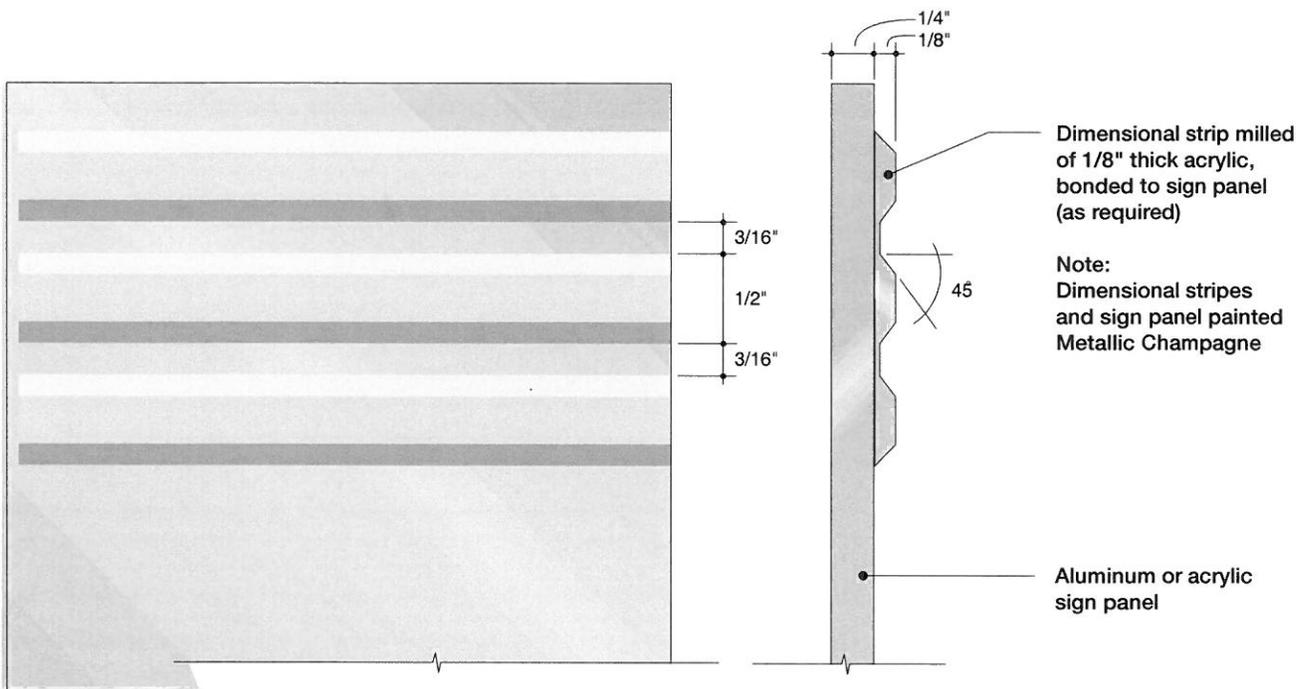


A Detail
Scale: Full size

A Layouts
Scale: 1" = 1' - 0"

Sign Type 8
Revised 4/01/14

Overhead Directional


8A.2

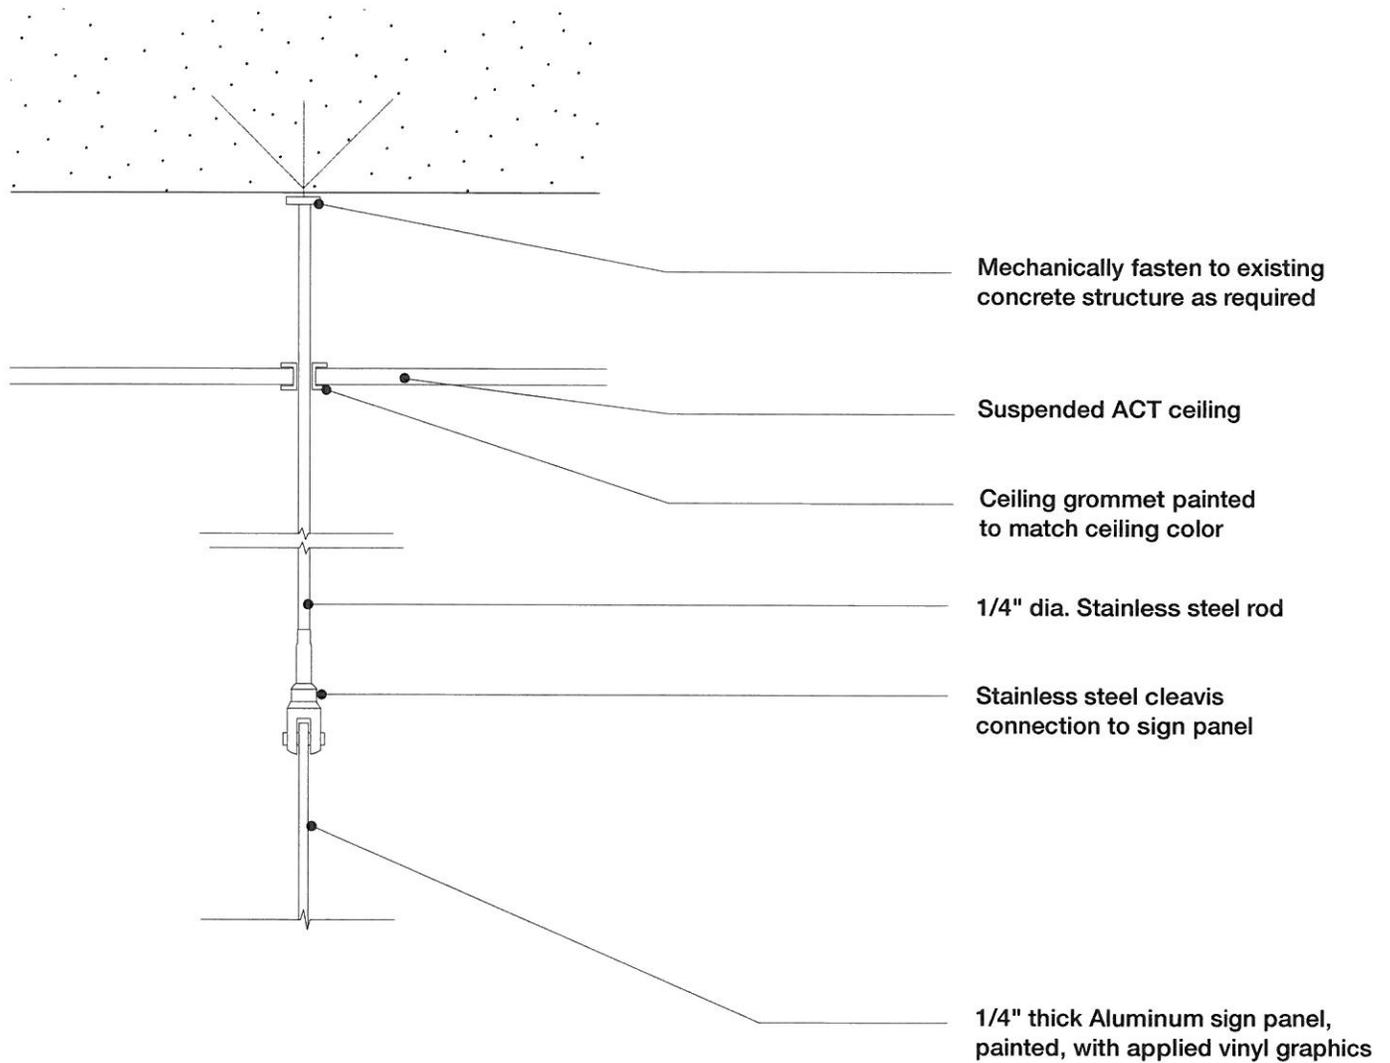

A

Section, Overhead Directional Sign Type 8A

Scale: 3" = 1' - 0"

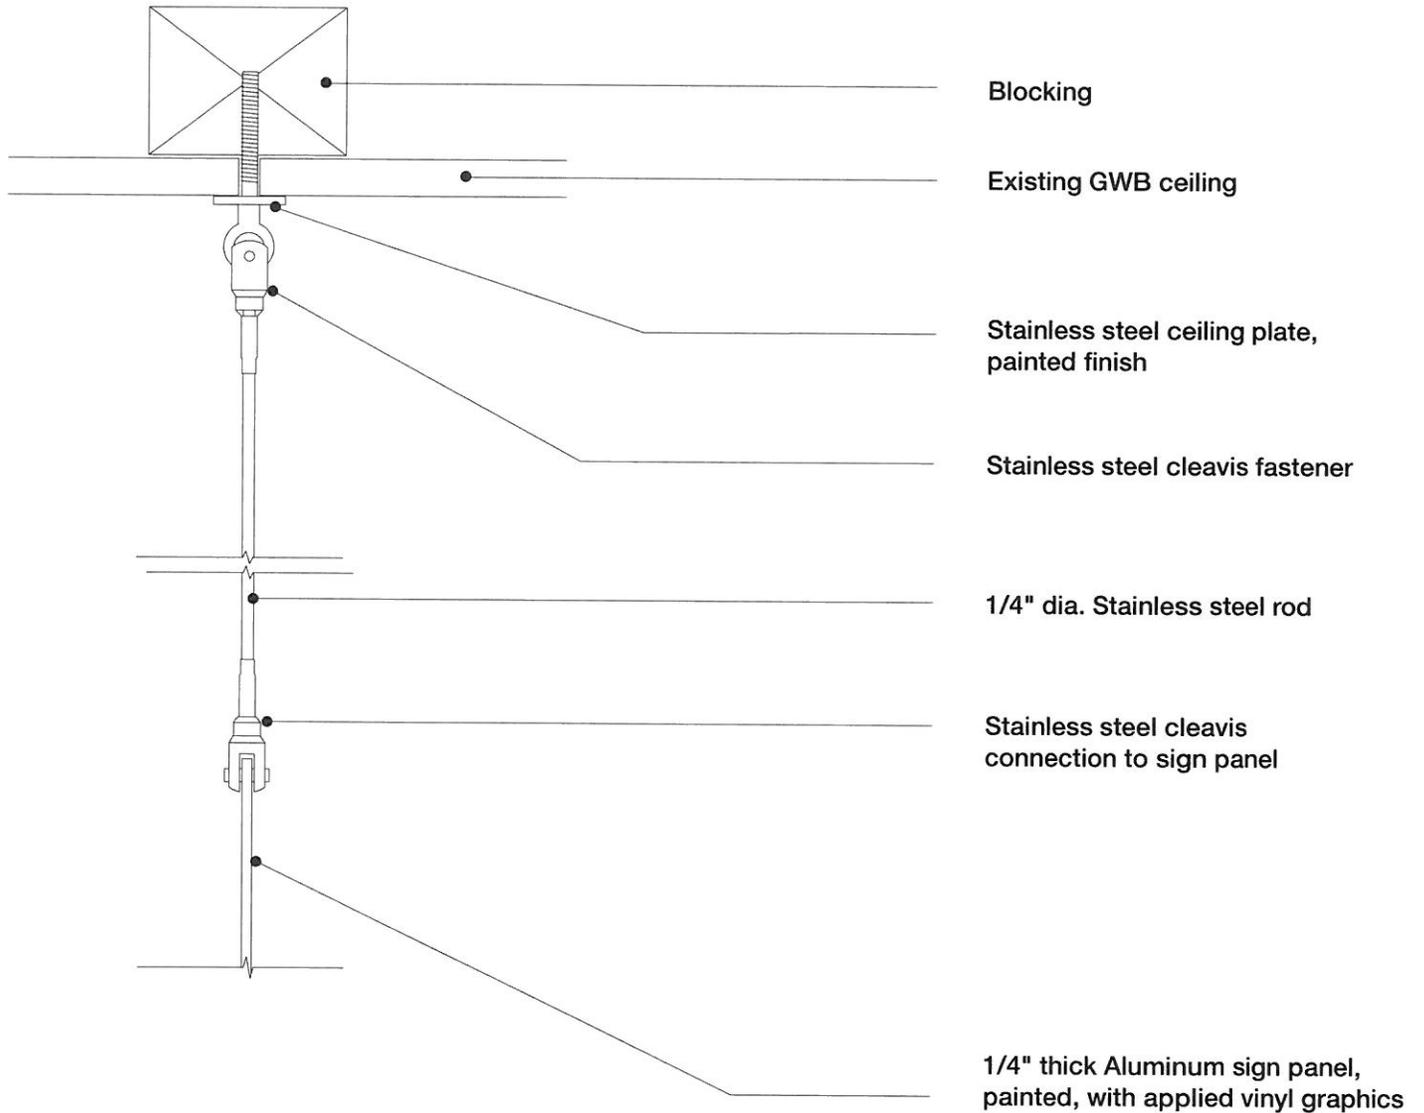

A


Section, Overhead Directional Sign Type 8A

Scale: 3" = 1' - 0"

Sign Type 8B
Revised 4/01/14

Overhead Directional

8B

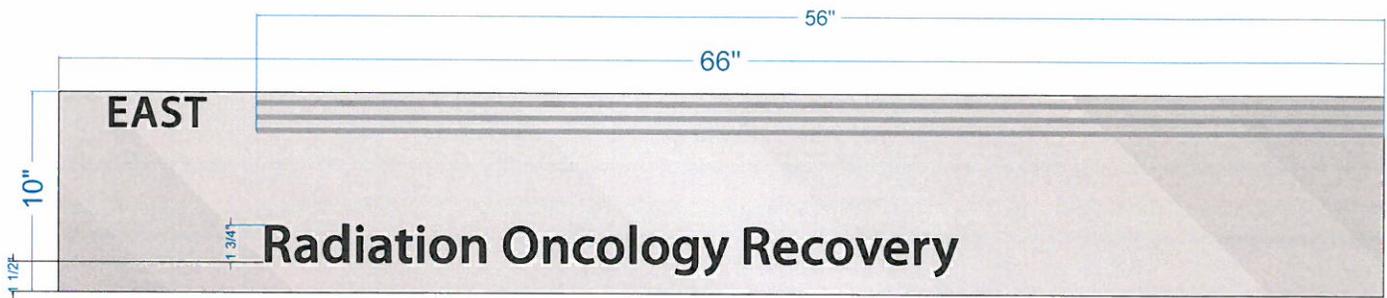

Sign Type 8B
Overhead Directional/Area ID - Wall Mounted
66Wx10H
Aluminum or Acrylic w/painted finish & applied graphics



Wall mounted Sign Type 8B

Scale: 3" = 1' - 0"

Sign Type 9A Overhead Directional
Revised 4/01/14

9A


TYPEFACE: Myriad Pro Semibold

COLORS: **Sign panel** Ⓓ Metallic Champagne
Text and arrow Ⓓ Dark Gray

MATERIALS & FINISHES:

1/4" thick acrylic, painted finish
with dimensional acrylic stripes and
applied vinyl graphics.

Ceiling suspended with stainless steel
rods and cleavis fasteners.

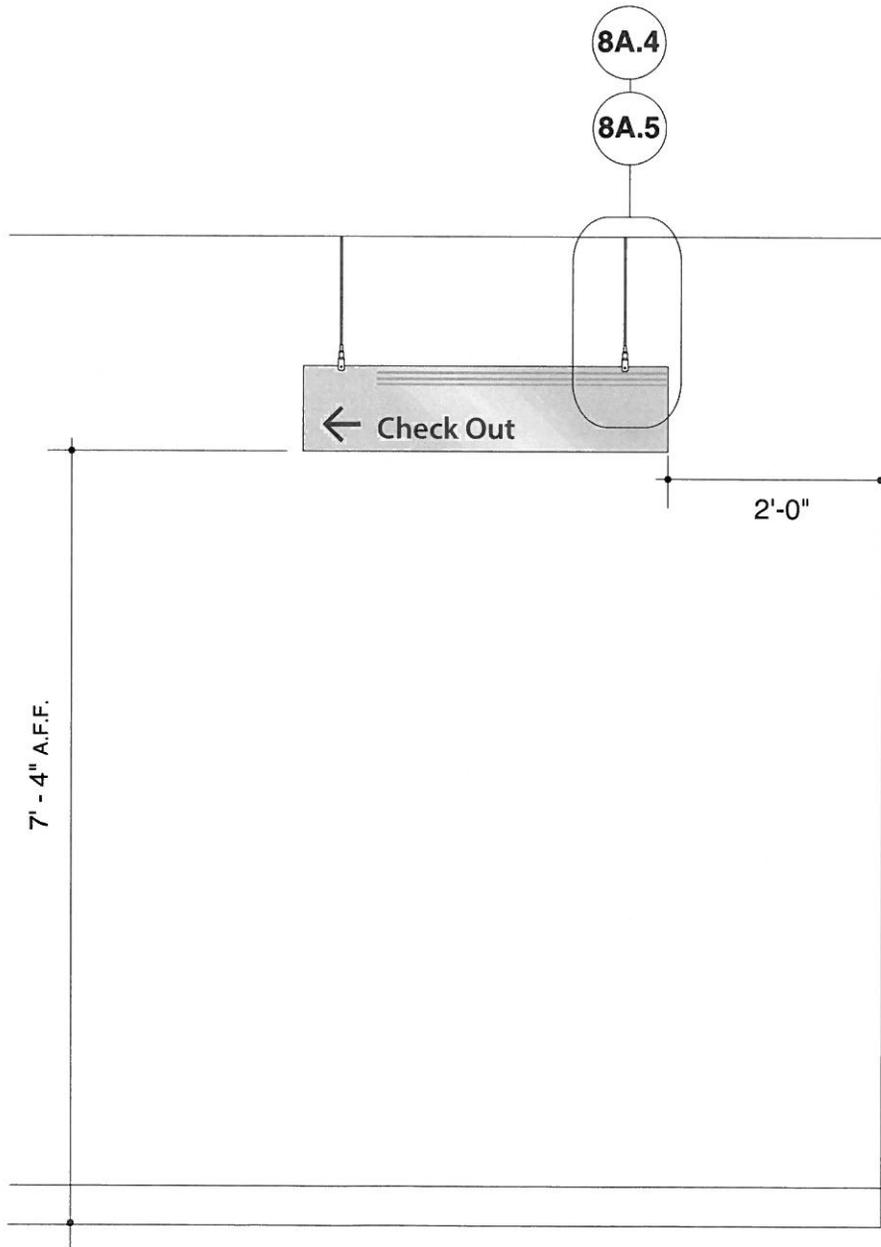

A Location Elevation - ceiling suspended
Scale: 1/2" = 1' - 0"


Sign Type 9B Overhead Directional
Revised 4/01/14

9B

TYPEFACE: Myriad Pro Semibold

COLORS: **Sign panel** - Metallic Champagne
Text and arrow - Dark Gray

MATERIALS & FINISHES:
1/4" thick acrylic, painted finish
with dimensional acrylic stripes and
applied vinyl graphics.
Mounted to wall with studs
and adhesive as required.

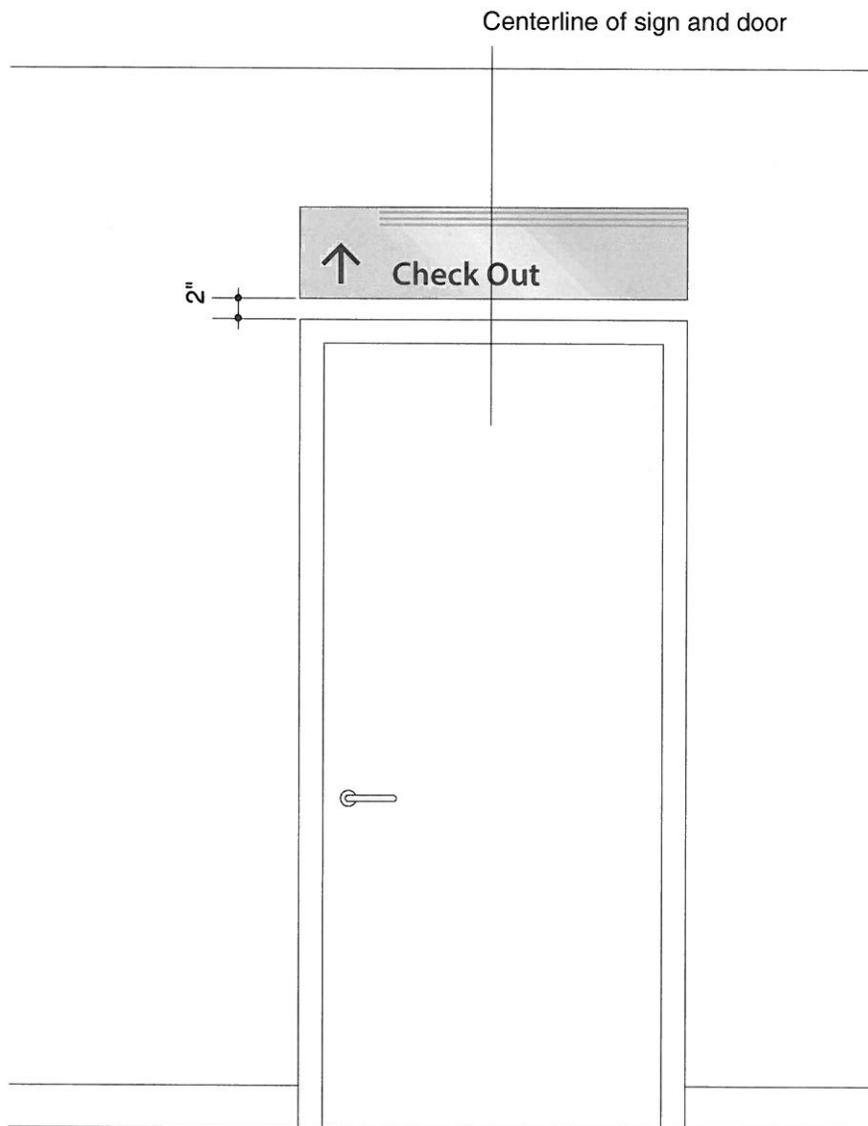

A Location Elevation - wall mounted
Scale: 1/2" = 1' - 0"


Sign Type 9A/B
Revised 4/01/14

Overhead Directional

9A/B.1




Sign Type 9A
Overhead Directional - Suspended
42Wx10H
Aluminum or Acrylic w/painted finish & applied graphics

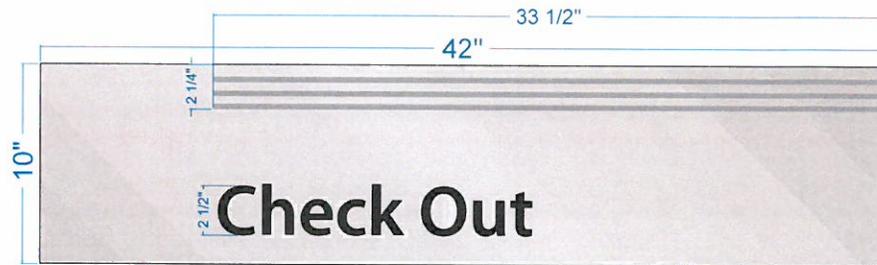

Sign Type 9B
Overhead Directional/Area ID - Wall Mounted
42Wx10H
Aluminum or Acrylic w/painted finish & applied graphics


Sign Type 10 Flag mounted signs
Revised 4/01/14

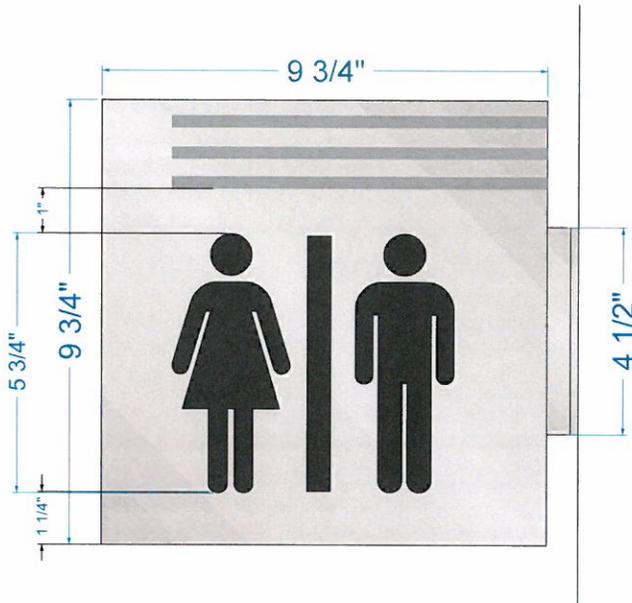

TYPEFACE: Myriad Pro Semibold

COLORS: Panel - Metallic Champagne
Bracket - Metallic Champagne
Symbols and Text - Dark Gray


MATERIALS & FINISHES:
Acrylic sign panel with surface vinyl graphics.
Painted aluminum bracket mechanically fastened to wall as required.

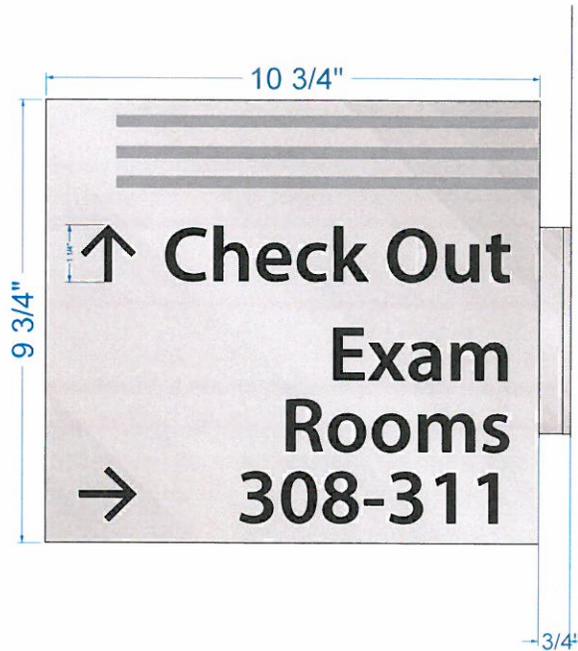

Sign Type 10A
Revised 4/01/14

Flag mounted signs

10.1

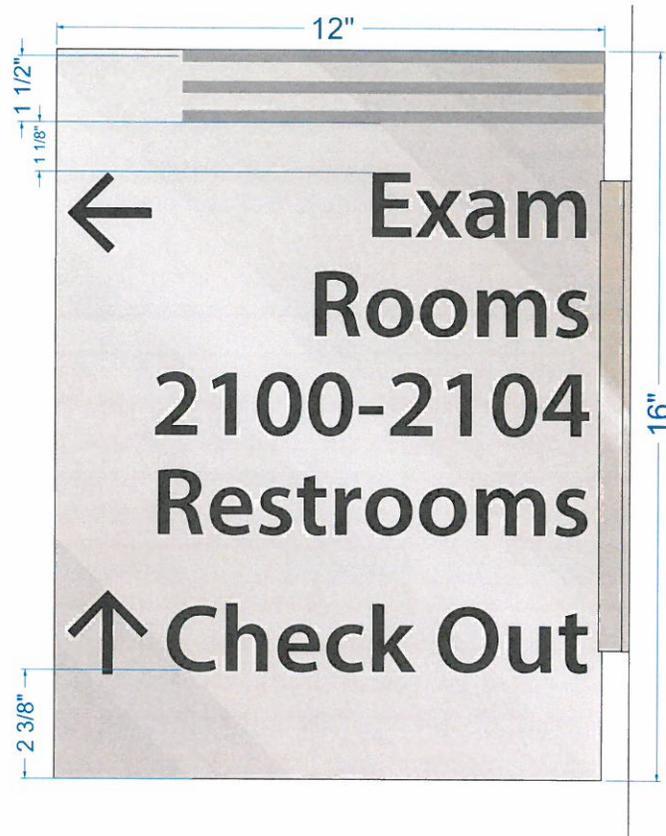

Sign Type 10A


Oversized Flag Sign - Dbl Sided

12"Wx16"H

Acrylic w/painted finish Metallic Champagne
& applied graphics


Sign Type 10/10A Flag mounted signs
Revised 4/01/14

10.2

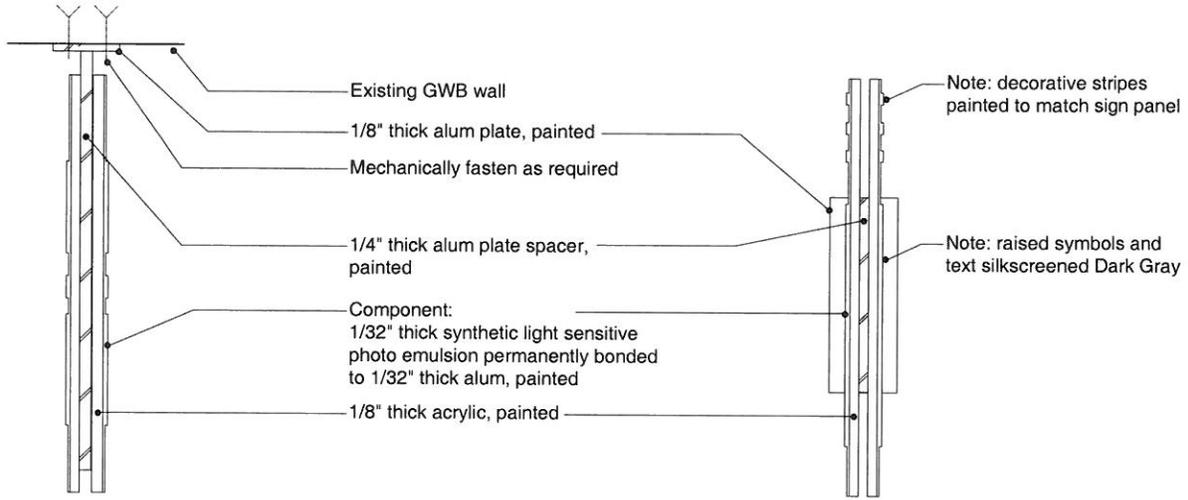


B Horizontal Section
Scale: 3" = 1' - 0"


C Vertical Section
Scale: 3" = 1' - 0"

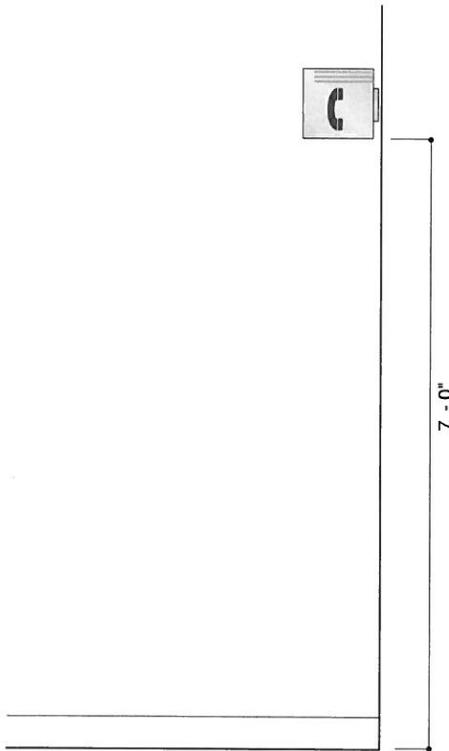

A Location Elevation - typical
Scale: 1/2" = 1' - 0"

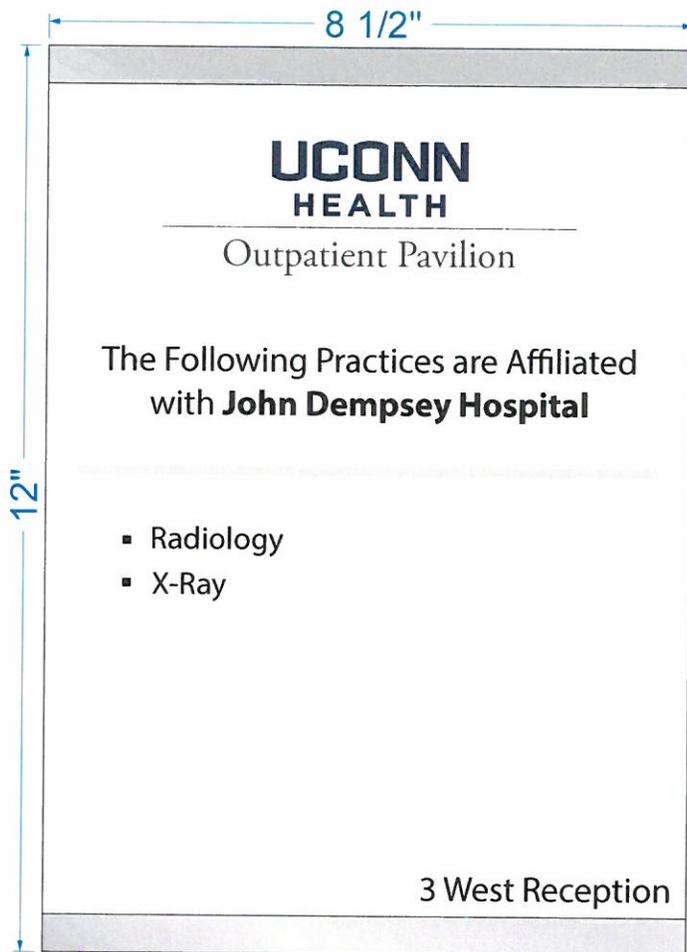

Front View

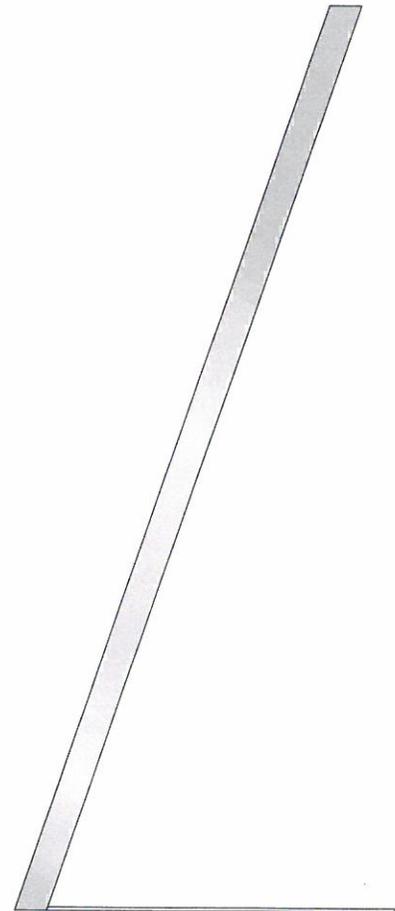

Side View

UCONN Renderings.cdr

Image is not to scale

I have verified the accuracy of all graphics shown with respect to sizes and content. The specifications are correct and represent our order requirements exactly. I authorize release to production according to this approved submittal.

APPROVED BY: _____

DATE: _____