ITEM #0406287A – RUMBLE STRIPS - AUTOMATED

ITEM #0406288A – RUMBLE STRIPS - MANUAL

Description:
Work under this item shall consist of installing rumble strips on asphalt highway shoulders where shown on the plans or where directed by the Engineer, and in conformance with these specifications.

Construction Methods:
The Contractor shall pre-mark the location of the edge of the cut, and the beginning and ending points of the sections, prior to the installation of the rumble strips. The Engineer shall review and approve the locations.

The Contractor shall arrange for a technical representative, from the company which produces the milling machine to be used on the project, who will be required to be on-site from the beginning of the operation in order to ensure results that meet the requirements of the plans and specifications until such time the Engineer is satisfied.

Rumble strips should not be installed on bridge decks, in acceleration and deceleration lanes, at drainage structures, at loop detector sawcut locations, or in other areas identified by the Engineer.

Automated (Wide Shoulders):
The equipment shall be able to install the rumble strips in sections where the shoulder width from the edge line to an obstruction is greater than or equal to 4 feet. Where there are no obstructions, the equipment shall be used in sections where the shoulder width from the edge line is a minimum of 3 feet. The equipment shall consist of a rotary type cutting head with a maximum outside diameter of 24” and shall be a minimum of 16” long. The cutting head(s) shall have the cutting tips arranged in such a pattern as to provide a relatively smooth cut (approximately 1/16 of an inch between peaks and valleys) in one pass. The cutting head shall be on its own independent suspension from that of the power unit to allow the tool to self align with the slope of the shoulder or any irregularities in the shoulder surface. The equipment shall include suitable provisions for the application of water to prevent dusting. The Contractor shall use a machine capable of creating the finished pattern at a minimum output of 60 rumble strips per minute.

Manual (Narrow Shoulders):
The equipment shall be able to install the rumble strips in sections where the shoulder width from the edge line to an obstruction is between 3 feet and 4 feet. The cutting head(s) shall have the cutting tips arranged in such a pattern as to provide a relatively smooth cut (approximately 1/16 of an inch between peaks and valleys) in one pass. The equipment shall include suitable provisions for the application of water to prevent dusting.

Finished Cut (Automated or Manual)
The rumble strips shall have finished dimensions of 7” (+/- 1/2”) wide in the direction of travel and shall be a 16” (+/- 1/2”) long measured perpendicular to the direction of travel. The depressions shall have a concave circular shape with a minimum 1/2” depth at center (maximum allowable depth is 5/8” measured to a valley). The rumble strips shall be placed in relation to the roadway according to the patterns shown in the plans or on the Rumble Strip Details. Alignment of the edge of the cut shall be checked and verified by the Engineer.

The cutting tool shall be equipped with guides to provide consistent alignment of each cut in relation to the roadway.

The Contractor shall pick up any waste material resulting from the operation in a manner acceptable to the Engineer. This waste material shall be disposed of in accordance with Subarticle 2.02.03-10(a).

The work area shall be returned to a debris-free state prior to re-opening to traffic.

The Contractor shall provide all traffic control according to the Maintenance and Protection of Traffic Specification included elsewhere in the contract.

Method of Measurement:
This work will be measured for payment by the actual number of feet of shoulder where the rumble strips are placed and accepted. This distance shall be measured longitudinally along the edge of pavement with deductions for bridge decks, acceleration and deceleration lanes, drainage structures, loop detector sawcut locations, and other sections where the rumble strips were not installed.

Basis of Payment:
This work will be paid for at the Contract unit price per foot for "Rumble Strips - Automated" or "Rumble Strips - Manual." The price shall include furnishing all equipment, tools, labor, a technical representative and work incidental thereto and also disposal of any waste material resulting from the operation. The Contractor will not be paid under the item "Rumble Strips - Manual" if the field conditions allow for the use of the "Rumble Strips - Automated" item, even if the manual method was used.

DETAILS AND SECTIONS OF RUMBLE STRIPS

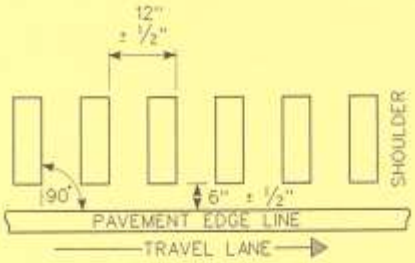

LOCATION DETAIL (TYP.)
LEFT SHOULDER

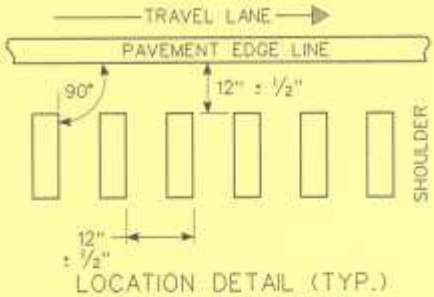

LOCATION DETAIL (TYP.)
RIGHT SHOULDER

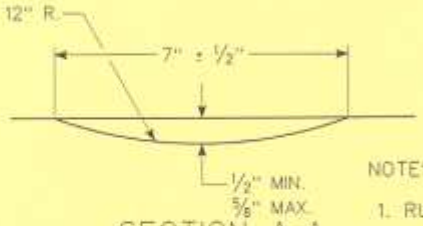

SECTION A-A
NO SCALE

NOTES:

1. RUMBLE STRIP ALIGNMENT SHALL GENERALLY BE STRAIGHT AND OFFSET APPROXIMATELY 6" IN THE LEFT SHOULDER AND 12" IN THE RIGHT SHOULDER FROM THE OUTER EDGE OF THE EDGE LINE AND SHALL BE AT LEAST 12" FROM THE LONGITUDINAL JOINT IN COMPOSITE PAVEMENTS. THIS OFFSET MAY BE ADJUSTED TO ACCOMMODATE VARIATIONS IN THE EDGE LINE AND THE SHOULDER WIDTH.

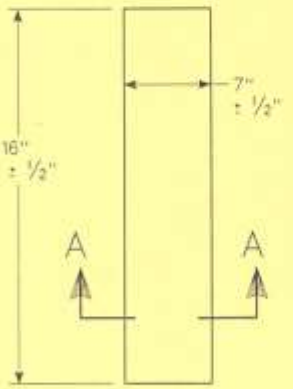

PLAN DETAIL

FILE: RUMBLE.MDS

CONNECTICUT
DEPARTMENT OF TRANSPORTATION
BUR. OF ENGINEERING & HWY. OPERATIONS
DIVISION OF TRAFFIC ENGINEERING

RUMBLE STRIP DETAILS

ENGINEER Erika B. Smith DATE 10-18-99
SUBMITTED Stephen J. Masiello DATE 10-20-99
TRAFFIC SUPERVISING ENGR.
APPROVED [signature] DATE 10-20-99
PRINCIPAL ENGINEER

SCALE - NONE

ITEM # 0406287A
ITEM # 0406288A

3 OF 4

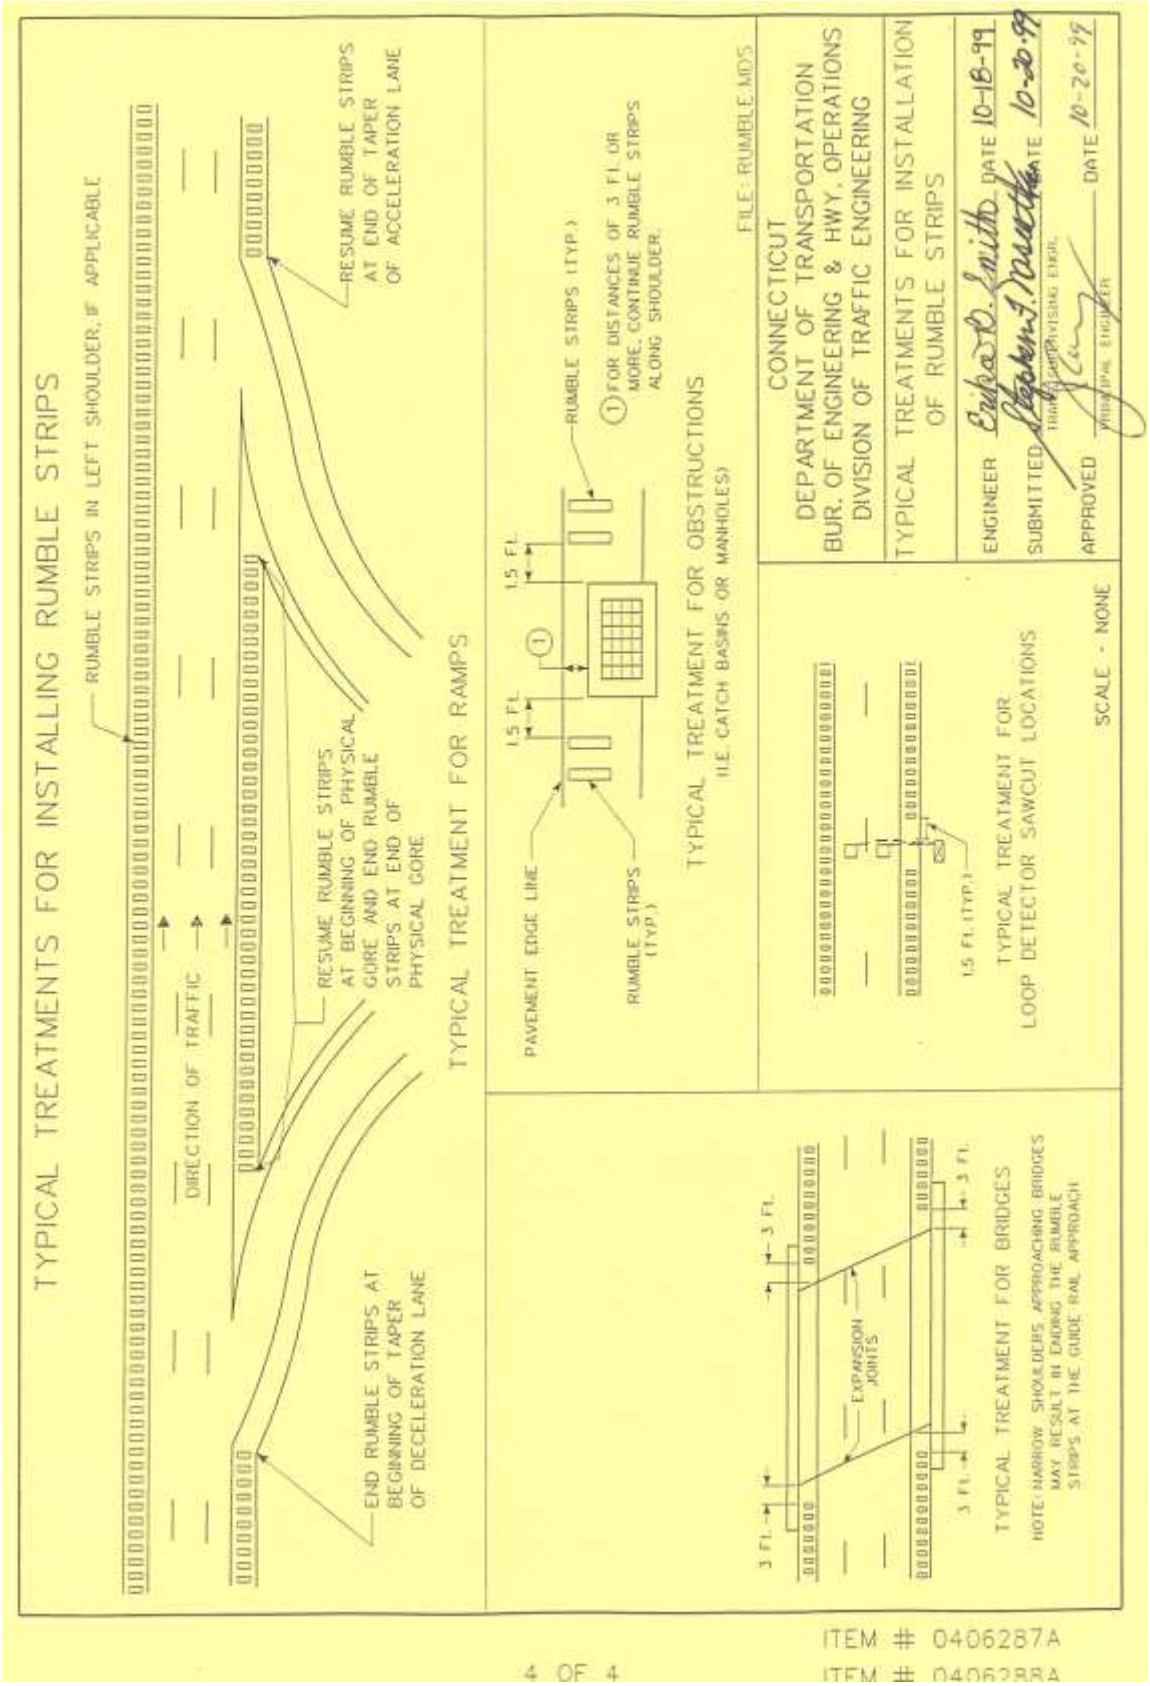
TYPICAL TREATMENTS FOR INSTALLING RUMBLE STRIPS
RUMBLE STRIPS IN LEFT SHOULDER, IF APPLICABLE
DIRECTION OF TRAFFIC
END RUMBLE STRIPS AT BEGINNING OF TAPER OF DECELERATION LANE
RESUME RUMBLE STRIPS AT BEGINNING OF PHYSICAL GORE AND END RUMBLE STRIPS AT END OF PHYSICAL GORE
RESUME RUMBLE STRIPS AT END OF TAPER OF ACCELERATION LANE
TYPICAL TREATMENT FOR RAMPS
PAVEMENT EDGE LINE
1.5 FT.
RUMBLE STRIPS (TYP.)
RUMBLE STRIPS (TYP.)
1 FOR DISTANCES OF 3 FT. OR MORE, CONTINUE RUMBLE STRIPS ALONG SHOULDER.
TYPICAL TREATMENT FOR OBSTRUCTIONS
(I.E. CATCH BASINS OR MANHOLES)
1.5 FT. (TYP.)
TYPICAL TREATMENT FOR LOOP DETECTOR SAWCUT LOCATIONS
3 FT.
EXPANSION JOINTS
TYPICAL TREATMENT FOR BRIDGES
NOTE: NARROW SHOULDERS APPROACHING BRIDGES MAY RESULT IN ENDING THE RUMBLE STRIPS AT THE GUIDE RAIL APPROACH
FILE: RUMBLE.MDS
SCALE - NONE
CONNECTICUT
DEPARTMENT OF TRANSPORTATION
BUR. OF ENGINEERING & HWY. OPERATIONS
DIVISION OF TRAFFIC ENGINEERING
TYPICAL TREATMENTS FOR INSTALLATION OF RUMBLE STRIPS
ENGINEER
SUBMITTED
APPROVED
DATE 10-18-99
DATE 10-20-99
DATE 10-20-99
ITEM # 0406287A
ITEM # 0406288A
4 OF 4