

**NEW WAREHOUSE BUILDING
EASTERN CONNECTICUT STATE UNIVERSITY
Willimantic, CT
PROJECT: BI- RW-319**

BID OPENING	1:00 P.M.	July 11, 2012
ADDENDUM NUMBER 1	DATE OF ADDENDUM	July 10, 2012

The following clarifications are applicable to drawings and specifications for the project referenced above.

Item 1 -Change the bid opening date from July 11, 2012 @ 1:00 P.M. to July 18, 2012 @ 1:00P.M.

Drawings

Item 2 - Drawing SD-1

a- Drawing indicates to remove a portion of the existing 10" sewer line that runs under the new building and rerouting it around the perimeter of the new building.

- That portion of the existing sewer line maybe abandoned in place and capped upstream and downstream.

Item 3 - Drawing A-101

a- **The note indicating the quantity of shelving at 87 unit is correct.**

Item 4 - Drawing A-201

a- **Door Schedule- door 106, door elevation should be HM3 not HM4**

b- **Door Schedule- door 102, door frame is actually a galvanized steel channel frame as noted in the jamb details and the structural drawings.**

c- **Clearstory Elevation 11/A201**

i. **Vertical detail number 2/A-401 should be 2/A-301**

ii. **Intermediate mullion detail number 2/A-401 should be 3/A-401**

iii. **Height of the Clearstory panels is approximately 4'-7". This and all other dimensions must be field verified.**

Item 5 - Drawing A-301

a- **Detail 6/A-301- include additional insulation requirements per SKA-1.**

Item 6 - Drawing a-401

a- **Detail 6/a-401- include addition insulation requirements per SKA-1.**

Item7 - Drawing M0.1

a- **Change detail 3: Locate shut off valve on propane piping in vertical pipe up stream of drip leg.**

Item 8 - Drawing P0.1

a- **Change shower enclosure to Aquarius model number S4136 BF. Enclosure shall have a recessed flange for dry wall installation. Shower shall be**

provided with horizontal and vertical grab bars, fold up seat, collapsible water dam and chrome drain.

- b- Change Detail #5: Add union at propane connection to water heater. Locate shut off valve up stream of dirt leg.
- c- Change detail #4: delete by-pass piping.
- d- Change Detail #1: change vent size from 1-1/4" to 1-1/2"

Item 9 - Drawing P0.2

- a- Change detail #1: Add vent to shower drain
- b- Change detail #1: Add cleanouts to all horizontal drains more than three feet from sanitary main.
- c- Change detail #2: Add thermostatic mixing valve at each lavatory and sink. Thermostatic valve to be Leonard 210-SC or equal.

Item 10 - Drawing P-1

- a- Add shut off valve for propane at inlet to second stage regulator.
- b- Change enlarged waste water piping plan: Add 3" drain from washing machine to 4" sanitary drain
- c- Add floor cleanout at FD-2 near in ground lift.
- d- Add wall cleanouts at water closets. Add cleanouts to all horizontal drains greater than three feet from sanitary main.

Specifications

Item 11 - Section 01 12 19, item F,

- a- all references to "OR" are changed to read "General Contractor".

Item 12 - Section 08 51 13- Aluminum Window

- a- Window manufacturer is changed to Graham Architectural Windows

Substitution/Additional approved manufacturers Requests

Item 13 - Section 10 51 13 Metal Lockers- WEC Manufacturing requested to be added to the approved manufacturer list.


Action: **Approved**

All questions must be in writing (not phone or e-mail) and must be forwarded to the consulting Architect/Engineer (Oak Park Architects 860-232-6121) with copies sent to the CT DCS project Manager (Ken Fitzgerald 860-713-7270).

End of Addendum Number One



David Busanet, Bidding & Contract Supervisor
Department of Administrative Services
On Behalf of the Department of Construction Services

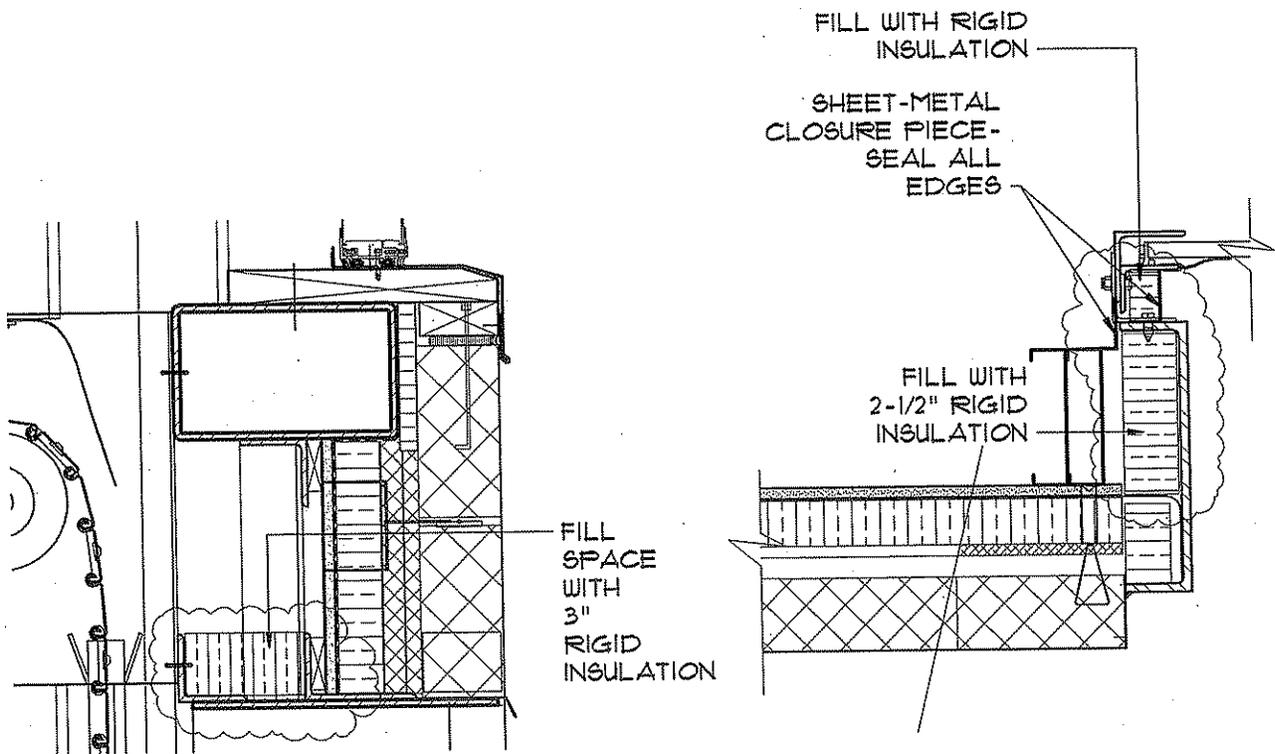

HEAD DETAIL
SCALE: 1-1/2" = 1'-0"

PLAN DETAIL
SCALE: 1-1/2" = 1'-0"

COILING DOOR DETAILS



NEW WAREHOUSE
EASTERN CONNECTICUT STATE UNIVERSITY
WILLIMANTIC, CONNECTICUT
BI-RW-319

STATE OF CONNECTICUT
DEPARTMENT OF CONSTRUCTION SERVICES

Date
X-XX-2012

Scale
1-1/2" = 1'-0"

SK-A1